
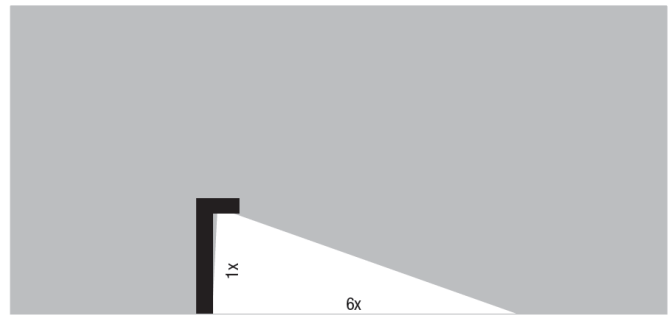
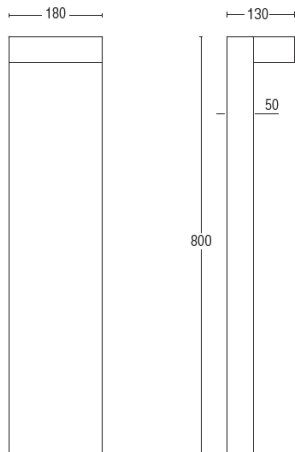


DRAGO FORWARD

LB6048.575

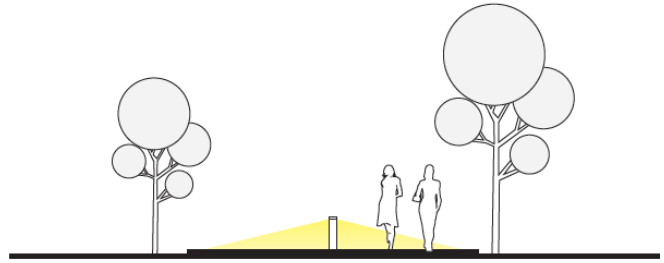

GENERAL HIGHLIGHTS


- Equipped with Heper's Dyno LED Module
- Optimized linear forward or Side light distribution
- Operating temperature: -40°C / $+55^{\circ}\text{C}$
- Exceptional thermal characteristics
- In compliance with EN 60598, EN 62722
- ENEC and UL pending

ELECTRICAL PROPERTIES

- Drive current: 350mA
- Optimized PCB - Design for Superior heat management
- Insulation class: CLASS II
- Energy class: A
- Input Voltage: 220V - 240V, 110V - 120V (optional) at 50Hz / 60Hz
- Control type: On/Off

OPTICAL PROPERTIES

- Equipped with Heper's Dyno LED Module
- Indirect lighting with reflector technology
- Linear form asymmetrical light distribution
- No glare with intended use
- High power, undomed LED chips
- MacAdam Elipse 3
- Lumen output (absolute photometry): 180lm - 725lm
- Color temperature: 3000K, 4000K, 2700K (optional)
- CRI > 70 (4000K), CRI > 80 (3000K)
- Lumen depreciation: L90B50 > 60000h
- Photobiological safety: Risk Group 0

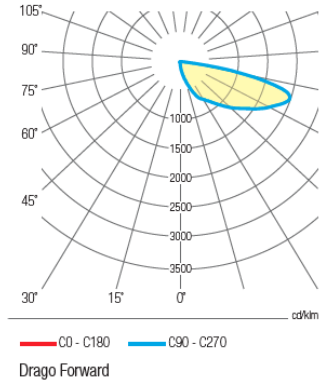

BODY HOUSING & FINISH


- Corrosion resistant aluminum housing
- Electrostatic powder coating
- HM1 to HM6 standard colors with optional RAL codes
- Ingress protection: IP65
- Impact protection: IK08
- Weight: 4.5 kg

EXTRAS

- Higher CRI LED chips
- Marine grade body

Finish Options

- HM1 –Special Black
- HM2 –Special Silvery Grey
- HM3 –Special Dark Grey
- HM4 –Special Light Grey
- HM5 –Special White
- Optional RAL codes

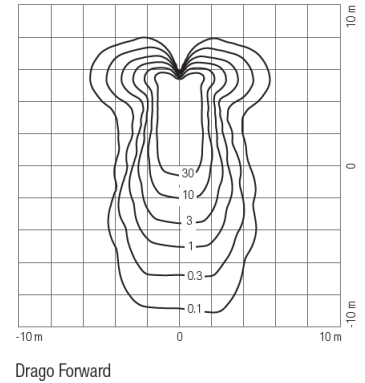

Drago Forward

| CODE | DESCRIPTION | CCT | DRIVE CURRENT | LUMEN OUTPUT (System) | POWER |
|------------|---------------|-------|---------------|-----------------------|-------|
| LB6048.575 | Drago Forward | 3000K | 350mA | 550 lm | 10W |
| LB6048.575 | Drago Forward | 4000K | 350mA | 725 lm | 10W |