


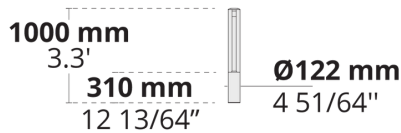
POLSO S

LB6051.006-EN

CE IK05 IP65 



QUICK-SHIP




[SYM-3L]

Symmetric, 360°,
Special effect: 3
lines - 360x20°

Variants

Light distribution	[SYM-3L] 360x20°
Nominal LED lumens flux	435 - 455 lm
Nominal LED power	7.5 W
Rated luminaire lumens flux	195 - 208 lm
Rated luminaire power	7.5 W
Colour temperature	3000 K CRI 90, 4000 K CRI 90
BUG rating	B0-U1-G0

Options

Control	On/Off
Input voltage	220-240V 50/60Hz, 120-277V 50/60Hz
Insulation class	Class I
Product colours	

Extras

Finishing options	Marine grade coating
--------------------------	----------------------

Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (grade 304)
Gasket	Liquid silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Wind catching area (EPA)	N/A
Weight	3.6 kg
Driver	Internal LED driver
Power factor	> 0.80
Through wiring Cable	Single cable entry 0.5 m of flexible cable

