


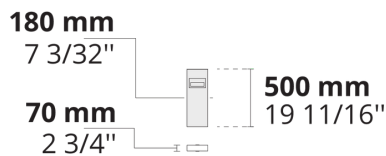
VERTEX 1 Module

LB6064.591-EN

CE IK08 IP66 

heper⁺

NEW




[T3]

Type III,
Asymmetric,
Side throw -
80x60°

Variants

Light distribution	[T3] 80x60°
Nominal LED lumens flux	952 - 1050 lm
Nominal LED power	6 W (350 mA)
Rated luminaire lumens flux	426 - 460 lm
Rated luminaire power	8 W
Colour temperature	3000 K CRI 80, 4000 K CRI 70
BUG rating	B0-U0-G0
Lifetime L90B50	>60,000
Lifetime L80B50	>60,000

Options

Control	On/Off
Input voltage	220-240V 50/60Hz, 120-277V 50/60Hz
Insulation class	Class I
Product colours	








Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (grade 304)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Weight	4.51 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.5 m of flexible cable

Project name		Type		Quantity	
Date		Note			

LB6064.591-EN-____-____-____-____-____-____-____

Light distribution	Drive current (LED power)	Colour temperature	Control	Input voltage
T3 Type III, Asymmetric, Side throw - 80x60°	350 6 W (350 mA)	830 3000 K CRI 80 740 4000 K CRI 70	ONOFF On/Off	EN 220-240V 50/60Hz UNI 120-277V 50/60Hz

Insulation class	Product colours
C1 Class I	<p>HM1  Black (Textured)</p> <p>HM2  Dark grey (Textured)</p> <p>HM3  Anthracite grey (Textured)</p> <p>HM4  Light grey (Textured)</p> <p>HM5  White (Textured)</p> <p>HM6  Bronze (Textured)</p> <p>CC  Custom Colour (Please specify RAL code)</p>