

## PICO LED IP54




## **OUTDOOR > PICO LED IP54**

A tiny surface wall mounted luminaire with LED source. It is ideal for home facade lighting and it is available with one or two-way light distribution.

**Technical Features** 

- Aluminium body, painted electrostatically in selected colour.
- Die-cast aluminium mounting base.
- Beam distribution glass lens.
- Pure light without IR/UV radiation.

- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).

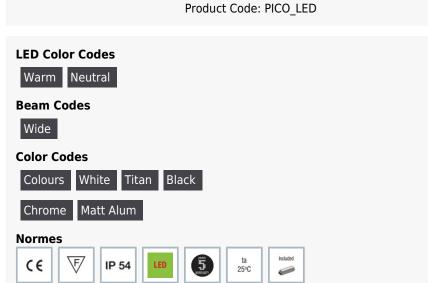

## Description

- Beams: Wide.
- Aluminium body.
- Glass lens.
- CRI: min. 80 / SCDM: 3
- Luminous Efficacy:
- 164 Lm/Watt at 4000K 350mA
- 154 Lm/Watt at 3000K 350mA

## Specification

General	
Catalogue Chapter	OUTDOOR
Product Family	PICO LED IP54
Lamp Category	LED
Fixation	WALL
IP	IP 54
Drawings	
Dimensional Drawing	99 60 60 51 60 60 60 60 60 60 60 60 60 60