

SLIM 3 LED



A linear LED luminaire which illuminates facades uniformly and emphasises their surfaces. Although buildings fade over time, the proper lighting can add value to them, highlight their uniqueness and make a lasting impression.


Technical Features

- Aluminium body.
- Beam distribution lens.
- Safety glass cover.
- Die cast aluminium and caps.
- Silicone sealant.
- Pure light without IR/UV radiation.
- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).
- Supplied with 3x1mm NEOPRENE 1,5m cable, or 4x0,75mm NEOPRENE for RGB version.


Upon request:

Available with highest colour rendering index (CRI)


SPOT

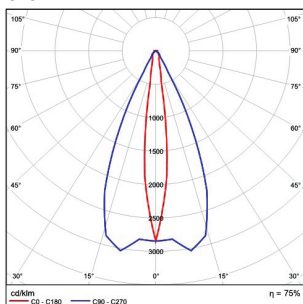


MEDIUM

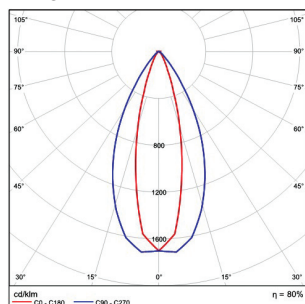

WIDE


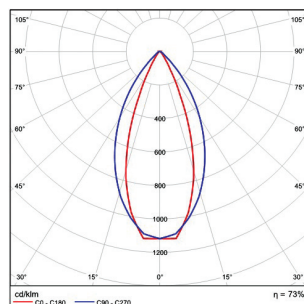


WW

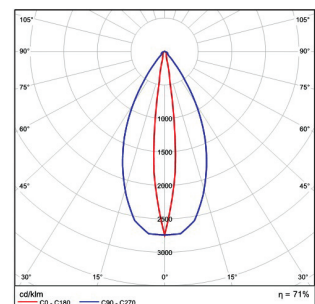

SLIM 3 LED

SLIM 3 - LED

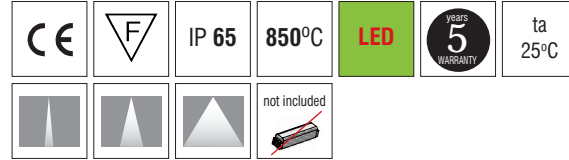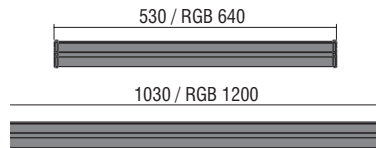


- Beams: Spot, Medium, Wide, WW.
- Aluminium body.
- Glass cover.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
39W: 6000 K: 135 Lm/Watt
39W: 4000 K: 131 Lm/Watt
39W: 3000 K: 123 Lm/Watt

Code	Description	Kg
812111	SLIM 3 LED 0,53m 21W (6-21W) Adjustable (1 driver required)	1,400
812221	SLIM 3 LED 1,03m 39W (14-39W) Adjustable (1 driver required)	1,900

Code	Description	Kg
8121919	SLIM 3 LED 0,64m 10W RGB 24V DC	1,550
8125919	SLIM 3 LED 1,20m 20W RGB 24V DC	2,000

SLIM 3 - LED ACCESSORIES



- Aluminium brackets.

Code	Description Drivers for Standard Version	Kg
800032	DRIVER CC 700mA 30W IP20	0,250
800013	DRIVER CC 1050mA 45W IP20	0,250
800041	DRIVER CC 350-1050 mA max. 50W IP20	0,300
800042	DRIVER CC 350-1050 mA max. 50W IP20 DALI/1-10VDC	0,300
800029	DRIVER CC 700 mA max. 36W IP67	0,300
800045	DRIVER CC 700 mA max. 65W IP67 (for 2 lum.)	0,600

Code	Description Drivers and Accessories for RGB Version	Kg
800062	DRIVER CV 24V DC max. 90W IP64	0,600
800071	DRIVER CV 24V DC max.30W IP20	0,300
800058	DRIVER CV 24V DC max.150W IP20	0,500
800059	DRIVER CV 24V DC max.350W IP20	0,700
800083	CONTROL UNIT RGB 12/24VDC 216-432W+REMOTE CONTROL	0,300

Code	Description Accessories for All Version	Kg
801101	Set aluminium brackets 10cm	0,300
801102	Set aluminium brackets 20cm	0,400
801105	CONNECTOR 4-POLE IP68	0,050

Led Colour:

1 Cool 2 Warm 3 Neutral

Beams Codes:

1 spot 2 medium 3 wide 4 WW

Colour Codes:

0 Colours 4 Anodized

DRIVER CURRENT	LUMINAIRE WATTAGE 0,53m (6 Led)	LUMINAIRE WATTAGE 1,03m (12 Led)
350 mA	6W	14W
500 mA	13W	22W
700 mA	16W	29W
1050 mA	21W	39W

SLIM 3 LED



SLIM 3 LED

