

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GELMI RANGE

ROUND



Round bulkhead lamp with ring, eyelid or grid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

*Plafoniera circolare con cover ad anello, a palpebra o a griglia. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a **LED GX53 con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*



2G3.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6

CE CB IECB SCHEME UV UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK TEMPERATURE +90° -60°

PUBLIC RESIDENTIAL INDOOR OUTDOOR

WALL CEILING



GELMI - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.

COVER in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalampada GX53 o di piatto riflettente in resina bianca e portalampada E27.

GELMI



Dimensions and weight

Diameter: Ø 313 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

		100 - 240 V			*ADD. SUFFIX
	7 W	800 Lm	6500 K	.A1K	
			4000 K		
			2700 K		
	11 W	1300 Lm	6500 K	.B1K	
			4000 K		
			2700 K		
18 W	2000 Lm	6500 K	.E1K		
		4000 K			
		2700 K			

7W
 11W
 18W
 =
 60W
 100W
 150W
SAVE 90%

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


E27 (CFL -LED)	max 160 mm	*ADD. SUFFIX .E27
E27 + SENSOR (CFL -LED)		*ADD. SUFFIX .ES7

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GELMI RANGE

ROUND



1G3.000



2G3.000




3G3.000




GELMI GX53	
7W	1G3.000.A1K
11W	1G3.000.B1K
18W	1G3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

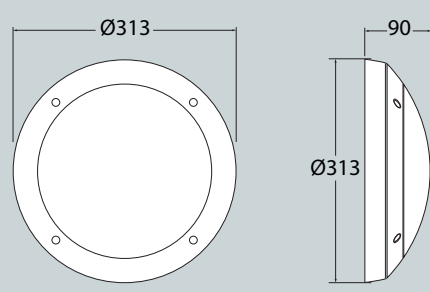

Pcs 16
Kg 20
mc 0,194


GELMI E27	
E27 lampholder	1G3.000.E27
E27 with sensor	1G3.000.ES7

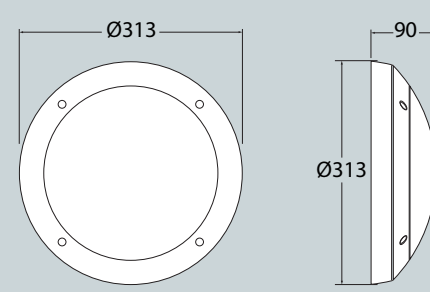

Pcs 16
Kg 16,8
mc 0,194


GELMI-EL GX53	
7W	2G3.000.A1K
11W	2G3.000.B1K
18W	2G3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

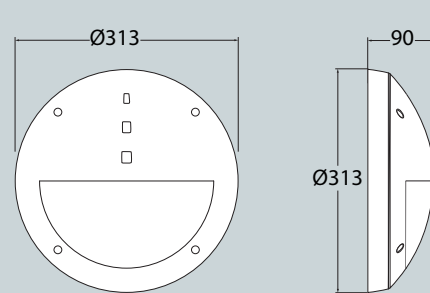

Pcs 16
Kg 20
mc 0,194


GELMI-EL E27	
E27 lampholder	2G3.000.E27
E27 with sensor	2G3.000.ES7

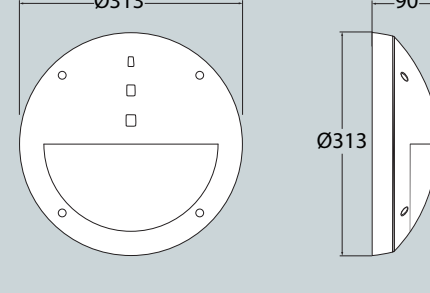

Pcs 16
Kg 16,8
mc 0,194


GELMI-GR GX53	
7W	3G3.000.A1K
11W	3G3.000.B1K
18W	3G3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

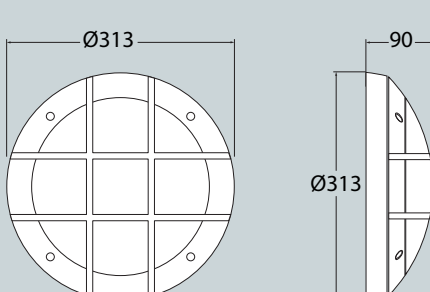

Pcs 16
Kg 20
mc 0,194

GELMI-GR E27	
E27 lampholder	3G3.000.E27
E27 with sensor	3G3.000.ES7

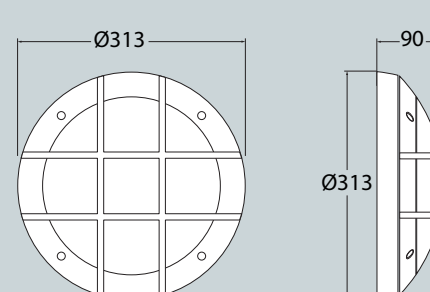

Pcs 16
Kg 16,8
mc 0,194