

GERMANA

FLOODLIGHT

Rectangular floodlight with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and post installation. Supplied with TÜV-CB certified, long-life efficient and **Kelvin settable GX53 LED lamps included** or provided with **E27 lampholder**. Motion sensor version available. Insulation class II, Protection rating IP66.



Proiettore rettangolare senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete e a palo. Provvisto di lampadine a LED GX53 con kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza o fornito nella versione E27. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.



2N1.000.C2K

CCT SETTABLE

3000 K 4000 K 6500 K


SDCM <6

CE CB IECEE CB SCHEME UV UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK TEMPERATURE +90° -60°

PUBLIC RESIDENTIAL INDOOR OUTDOOR WALL POST



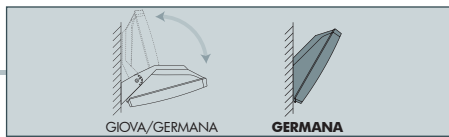

GERMANA - COMPONENTS

IP 66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

GERMANA



Dimensions and weight

Height: 280 mm
Width: 180 mm
Weight: 1,4 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

2x GX53 LED



Floodlight supplied **fully pre-wired** complete with 2x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

| | | 100 - 240 V | | *ADD. SUFFIX |
|--|----------------------|-------------|--------|--------------|
| | 2x 3W 6W | 700 Lm | 6500 K | .G2K |
| | | | 4000 K | |
| | | | 3000 K | |
| | 2x 7W 14W | 1600 Lm | 6500 K | .C2K |
| | | | 4000 K | |
| | | | 3000 K | |
| | 2x 10W 20W | 2400 Lm | 6500 K | .D2K |
| | | | 4000 K | |
| | | | 3000 K | |

2x 10W = 50W
2.400 Lm SON-HQI

SAVE 60%

E27



Floodlight supplied **fully pre-wired** with white resin reflective ceiling designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side. *Daylight and motion sensor* available as an option. Sensor operating voltage: 220-240V (120V available on demand).


| | | |
|-----------------------------------|------------|------|
| E27 (CFL -LED) | max 160 mm | .P27 |
| E27 + Sensor (CFL -LED) | max 160 mm | .PS7 |

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE




2N1.000.D2K



2N1.000.P27

2N1.000.C2L

MADE IN ITALY

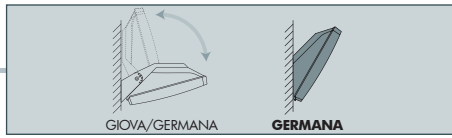



GERMANA GX53

6W 2N1.000.G2K

14W 2N1.000.C2K

20W 2N1.000.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K





Pcs 18
Kg 26,2
mc 0,198

GERMANA E27

E27 lampholder 2N1.000.P27

E27 with sensor 2N1.000.PS7



Pcs 18
Kg 18,1
mc 0,198

BOLLARD VERSION



Detailed information on page 194.