

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 300 CLASSIC

MEDIUM SIZE



Ø 300 mm PMMA globe, complete with classic globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

Globo Ø 300 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito anche completo di lampadine LED a filamento adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



G30.162



G30.111

E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION




GLOBE 300 CLASSIC - COMPONENTS

IP55



Ø 300 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 300 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

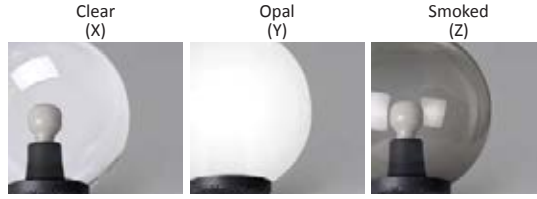

GLOBE BASE with classic design, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA con disegno classico realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampana E27.

GLOBE 300 CLASSIC

G30.B30 *



Dimensions and weight

Height: 310 mm
Diameter: 300 mm
Weight: 1,1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal Smoked

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		.E27
6 W	800 Lm	4000 K	.F1L	
		2700 K	.F1R	
8 W	1000 Lm	4000 K	.M1L	
		2700 K	.M1R	
12 W	1500 Lm	4000 K	.N1L	
		2700 K	.N1R	



LED LAMPS




Technical details on page 552.

Globe supplied with E27 base. Provided as an option with TÜV-CB certified, long-life and efficient **LED filament lamps suitable for outdoor use** with built-in driver fully protected against heat and humidity by silicone paste.

6W
8W
12W = 60W
75W
100W incandescent

SAVE 90%

PHOTOMETRIC DATA SAMPLE

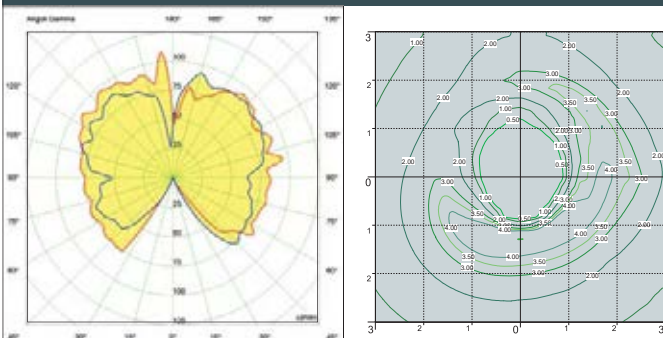

GLOBE 300 CLASSIC clear with Fumagalli Filament Led Lamp 8W.

POST height 2mt
6x6mt area: average 3,5 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GLOBE 300 CLASSIC

MEDIUM SIZE



G30.157.S20.M1R



G30.131.M1R



G30.111.M1R



G30.120.M1R

MADE IN ITALY

RICU BISSO/G300 2L	
E27	G30.157.S20.E27
6W LED	G30.157.S20.F1R
8W LED	G30.157.S20.M1R
12W LED	G30.157.S20.N1R
Pcs 2 Kg 29,4 mc 0,366	2700K*

RICU BISSO/G300 3L	
E27	G30.157.S30.E27
6W LED	G30.157.S30.F1R
8W LED	G30.157.S30.M1R
12W LED	G30.157.S30.N1R
Pcs 2 Kg 31,8 mc 0,401	2700K*

BISSO/G300	
E27	G30.131.E27
6W LED	G30.131.F1R
8W LED	G30.131.M1R
12W LED	G30.131.N1R
Pcs 24 Kg 44,2 mc 0,638	2700K*

SICHEM/G300	
E27	G30.120.E27
6W LED	G30.120.F1R
8W LED	G30.120.M1R
12W LED	G30.120.N1R
Pcs 24 Kg 44,2 mc 0,638	2700K*

GLOBE 300 CLASSIC	
G30.B30	
Pcs 2 Kg 2,2 mc 0,059	

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES .F1L(6W) .M1L (8W) .N1L (12W)

RICU/G300	
E27	G30.157.E27
6W LED	G30.157.F1R
8W LED	G30.157.M1R
12W LED	G30.157.N1R
Pcs 2 Kg 22,2 mc 0,274	2700K*

GIGI/G300	
E27	G30.156.E27
6W LED	G30.156.F1R
8W LED	G30.156.M1R
12W LED	G30.156.N1R
Pcs 2 Kg 20,7 mc 0,242	2700K*

ARTU'/G300	
E27	G30.158.E27
6W LED	G30.158.F1R
8W LED	G30.158.M1R
12W LED	G30.158.N1R
Pcs 2 Kg 17,7 mc 0,211	2700K*

ALOE'.R/G300	
E27	G30.163.E27
6W LED	G30.163.F1R
8W LED	G30.163.M1R
12W LED	G30.163.N1R
Pcs 2 Kg 8,2 mc 0,146	2700K*

MINILOT/G300	
E27	G30.111.E27
6W LED	G30.111.F1R
8W LED	G30.111.M1R
12W LED	G30.111.N1R
Pcs 24 Kg 44,2 mc 0,638	2700K*

IAFET.R/G300 resin	
E27	G30.162.E27
6W LED	G30.162.F1R
8W LED	G30.162.M1R
12W LED	G30.162.N1R
Pcs 2 Kg 7,5 mc 0,117	2700K*

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GLOBE 300 CLASSIC

MEDIUM SIZE



G30.201.R20



G30.132.M1R



G30.201.R30.M1R



G30.201.M1R





RICU OFIR/G300 3L	
E27	G30.157.R30.E27
6W LED	G30.157.R30.F1R
8W LED	G30.157.R30.M1R
12W LED	G30.157.R30.N1R
Pcs 2 Kg 29,9 mc 0,439	2700K*

MIRRA/G300	
E27	G30.142.E27
6W LED	G30.142.F1R
8W LED	G30.142.M1R
12W LED	G30.142.N1R
Pcs 1 Kg 5,1 mc 0,077	2700K*

OFIR/G300	
E27	G30.132.E27
6W LED	G30.132.F1R
8W LED	G30.132.M1R
12W LED	G30.132.N1R
Pcs 2 Kg 4,6 mc 0,077	2700K*

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES
.F1L(6W) .M1L (8W) .N1L (12W)

RICU OFIR/G300 2L	
E27	G30.157.R20.E27
6W LED	G30.157.R20.F1R
8W LED	G30.157.R20.M1R
12W LED	G30.157.R20.N1R
Pcs 2 Kg 26,3 mc 0,379	2700K*

NEBO/G300	
E27	G30.201.E27
6W LED	G30.201.F1R
8W LED	G30.201.M1R
12W LED	G30.201.N1R
Pcs 1 Kg 22,2 mc 0,163	2700K*

NEBO OFIR/G300 2L	
E27	G30.201.R20.E27
6W LED	G30.201.R20.F1R
8W LED	G30.201.R20.M1R
12W LED	G30.201.R20.N1R
Pcs 1 Kg 25,7 mc 0,208	2700K*

NEBO OFIR/G300 3L	
E27	G30.201.R30.E27
6W LED	G30.201.R30.F1R
8W LED	G30.201.R30.M1R
12W LED	G30.201.R30.N1R
Pcs 1 Kg 30,8 mc 0,237	2700K*