




GENERAL CATALOGUE

2021

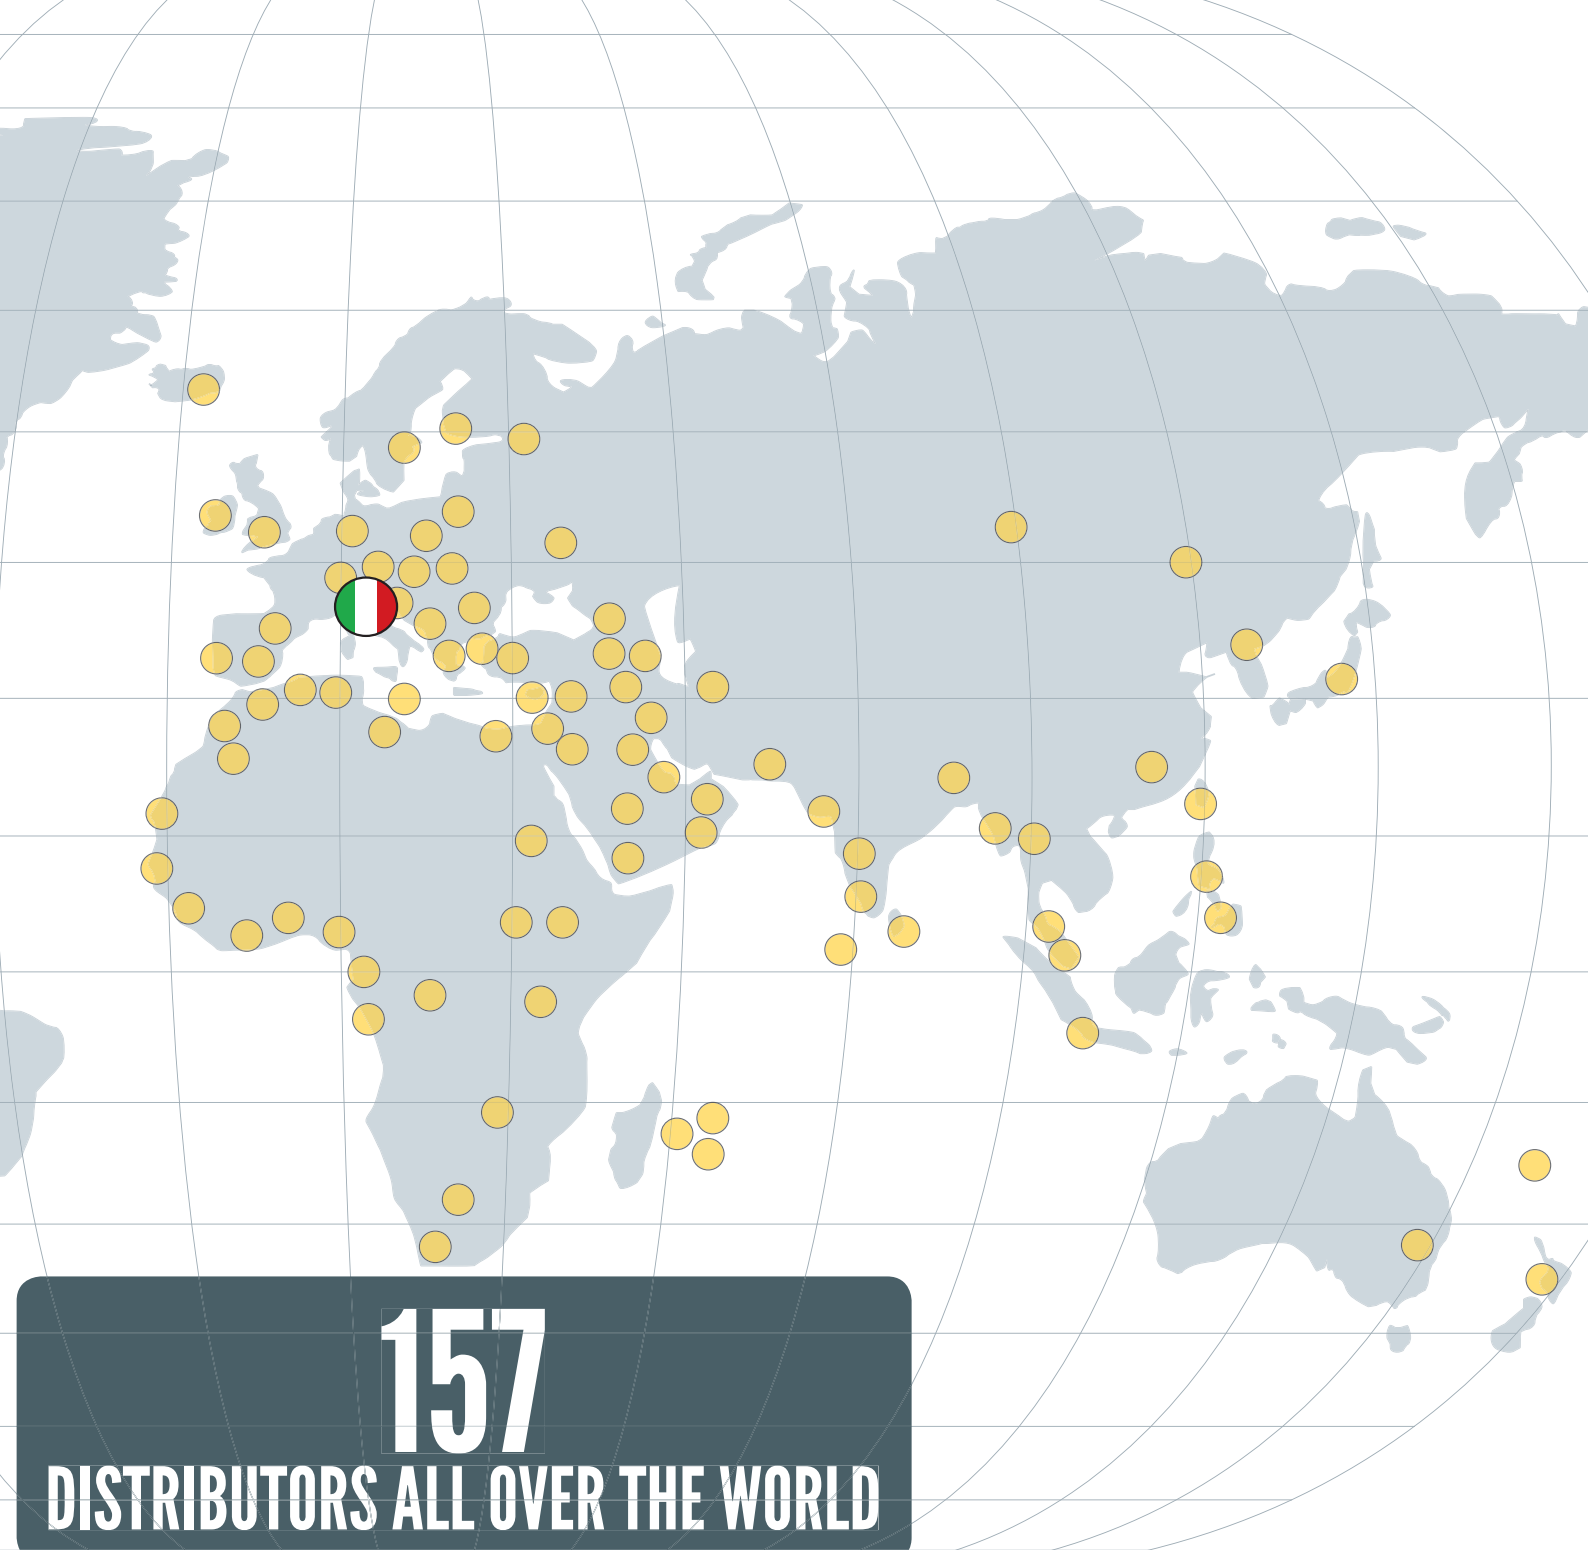

157

DISTRIBUTORS ALL OVER THE WORLD



HOW TO READ THE CATALOGUE



Corporate Management

Geom. Giancarlo Fumagalli
Managing Director

Holder of a diploma by the technical high school for building surveyor, he is the creator of this composite material lighting system.
He speaks Italian and French.

Diplomato alla scuola tecnica per geometri, è ideatore di questo sistema di lampade in materiale composito. Parla italiano e francese.



Dr. Marisa Rabuffetti
Finance Director

Graduate by the Milan University in economic sciences, she is teacher of banking and commercial technique. She speaks Italian, English and French.

Laureata all'università di Milano in scienze economiche, è insegnante alle scuole superiori di tecnica commerciale e bancaria. Parla italiano, inglese e francese.



Dr. Chiara Fumagalli
Commercial Director

Graduate by the Milan University in philosophy, she is holder of a diploma in foreign languages: she can speak and write in Italian, English, German French.

Laureata all'università di Milano in filosofia, è diplomata in lingue straniere: scrive e parla italiano, inglese, tedesco e francese.



Arch. Paolo Fumagalli
Purchasing and Technical Director

Graduate in architecture by the polytechnic University of Milan, he achieved the specialization in lighting technique by the University of Manchester (U. K.). He speaks Italian and English.

Laureato in architettura al Politecnico di Milano, ha conseguito la specializzazione in illuminotecnica all'università di Manchester (U.K.). Parla italiano e inglese.







Dr. Emmanuele Fumagalli
*Assistant General Manager
Human Resources Director*































Graduate by the Milan University in jurisprudence, he achieved the specialization in international law. He speaks Italian and English.

Laureato in Giurisprudenza all'università di Milano con specializzazione in diritto internazionale Parla italiano e inglese.



COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES



DOWN LIGHT 	LIVIA 60  50	LIVIA 90  52	LIVIA 160  54	LIVIA 180  56	TERESA  60						
LETI 300  104	EXTRALETI 100 ROUND  108	EXTRALETI 100 SQUARE  112	EXTRALETI 200  116	EXTRALETI 300  120							
CARLO-FS DECO  170	AMELIA  172	AMELIA WALL  174	AMELIA-FS  174	SAURO LED  176	SAURO E27  180	NARDO  183	GABRI/LUCIA  184	GABRI/MADDI  190	PINELA/PINA  194		
LUCIA  238	MADDI  242										
GLOBE 300 classic  292	GLOBE 300 modern  298										
BEPPE 500  492	ECOBEPPE 500  500	REMO 500  506	GINO 500  514	GLOBE 400 modern  Ø400 522	GLOBE 500 modern  Ø500 528						

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

1973

1984

1999



Thanks to the enterprise of Mr. Fumagalli Giancarlo, in 1973 an individual company called "La Bottega dei Maestri Forgiatori" was born in Varese (north of Italy) specialising itself in the artistic handwork of wrought iron indoor lightings. After five years of activity the company started to employ some workers and to open itself to foreign markets, in particular to the Japanese one.

Nasce a Varese, su iniziativa del Sig. Fumagalli una ditta individuale con il nome di "La Bottega dei Maestri Forgiatori", specializzata nella lavorazione artistica del ferro forgiato a mano. La produzione è costituita da lampade da interno. Dopo cinque anni l'azienda apre verso mercati esteri (in particolare il Giappone), inizia ad assumere i primi dipendenti.

An intuition of Mr.Fumagalli lead the company to an evolution, creating an innovative outdoor lightings production system, consisting of a galvanized steel tube covered by resin material. After some years of experimentation and the setting-up of adequate machineries, the product started to be appreciated all over the world.

Un'intuizione del Sig. Fumagalli porta l'azienda ad un'evoluzione, creando un ingegnoso processo produttivo di lampade da esterno, costituito da un'anima in acciaio galvanizzato rivestito in resina. Dopo anni di sperimentazioni e la faticosa messa a punto di un'attrezzatura adeguata, il prodotto comincia ad essere distribuito ed apprezzato in tutto il mondo.

Fumagalli family decides to turn the individual company into a limited company, going on with the manufacturing of "composite material" outdoor lighting fixtures. The articles range increased thanks to the creation of many new models and the production capacity was multiplied by the use of computerized machineries. The recent settlement in the new company seat had definitively made Fumagalli S.r.l. a worldwide leading company in the manufacturing of resin material outdoor lightings.


Subentrando alla ditta individuale, la famiglia Fumagalli decide di costituirsi in società, continuando la fabbricazione di lampade da esterno in materiale composito. Con la creazione di nuovi modelli viene ampliata l'offerta e con attrezzature robotizzate viene moltiplicata la produttività. La sistemazione nella nuova sede rende la società Fumagalli leader mondiale nel suo settore.



NEW
FACTORY
EXPANSION

2019 2021

2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2020

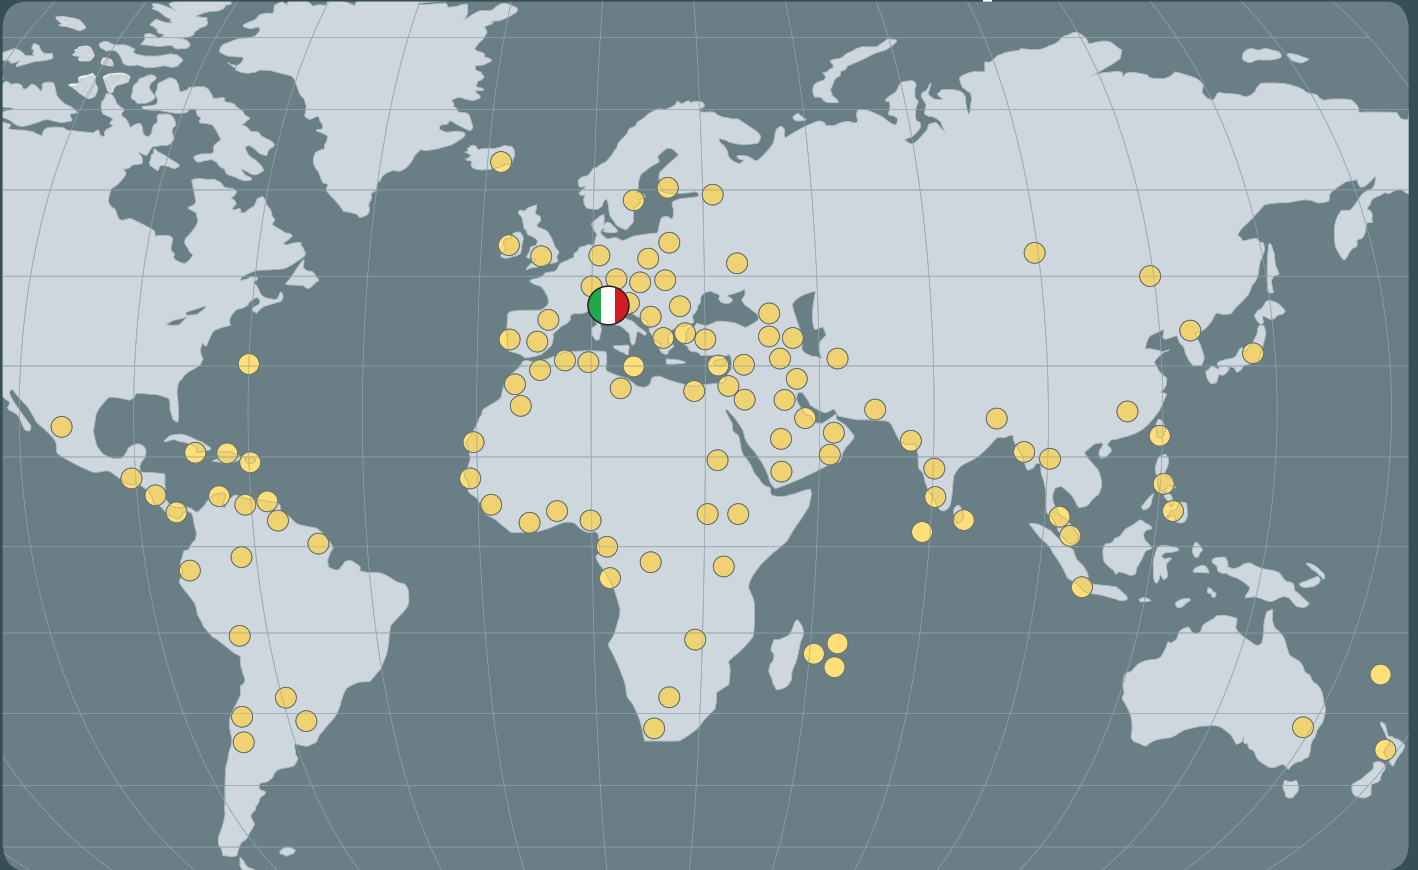

157
DISTRIBUTORS ALL
OVER THE WORLD



MADE IN ITALY

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY

PLANT



We are proud to define ourselves as a “pure Italian manufacturer”: all our products are strictly manufactured inside our factory located in Varese (Italy), on a **42.000 sqm area**. This means to keep a full control on the quality and performances of our products.

Siamo orgogliosi di poterci definire come fabbricanti italiani “puri”: tutti i nostri prodotti sono rigorosamente fabbricati all’interno dei nostri stabilimenti di Varese (Italia), su un’area di 42.000 m². Questo ci permette di esercitare un pieno controllo sulla qualità e sulle prestazioni dei nostri prodotti.



FACTORY





Member of
CONFEDERATION OF
ITALIAN INDUSTRY
ISO 9001:2015



ISO 9001:2015

SCESm 001




SMART FACTORY

INDUSTRY 4.0



INDUSTRY 4.0



A DIGITAL ENTERPRISE

In our company, product and production technologies are developed in a complete digital environment, to get an advanced manufacturing process fully automated and interconnected.

UN'AZIENDA DIGITALE

Nella nostra azienda prodotto e tecnologie produttive vengono sviluppati in un ambiente completamente digitale, per ottenere un avanzato processo di fabbricazione interamente automatizzato ed interconnesso.



INCREASED
PRODUCTIVITY

COST
REDUCTION

IMPROVED QUALITY
CONTROL

REAL TIME DATA EXCHANGE



MONITORING ON-LINE



MACHINERIES AND DEVICES INTERCONNECTION



PURE ITALIAN MANUFACTURER

Inside the following different departments of our company we can manage the whole product development process from the initial design to the fully-finished product.

PURI FABBRICANTI ITALIANI

All'interno dei seguenti dipartimenti della nostra azienda possiamo gestire l'intero processo di sviluppo del prodotto, dall'idea iniziale al prodotto realizzato.



**R&D DEPARTMENT
3D PROTOTYPING**

Product planning and design through the most advanced 3D modelling software, CAD systems and modern multimedia. Product engineering and prototypes creation with the most advanced 3D printers.

**RICERCA E SVILUPPO
PROTOTIPAZIONE 3D**

Progettazione e disegno del prodotto attraverso i software più avanzati di modellazione 3D, di sistemi CAD e di multimedia moderni. Ingegnerizzazione del prodotto e creazione di prototipi con le più avanzate stampanti 3D.



**TECHNICAL DESIGN
DEPARTMENT**

Mould design and engineering, toolpath programming through the most advanced 3D software directly connected to the CNC workstations.

**SEZIONE PROGETTAZIONE
STAMPI**

Progettazione e ingegnerizzazione degli stampi, studio dei percorsi utensile, attraverso i più avanzati software 3D direttamente collegati alle postazioni di lavoro CNC.



COMPANY

PRODUCT DEVELOPMENT



MOULD CONSTRUCTION DEPARTMENT

New hi-tech work stations, working only for the construction of our moulds, enable us to update constantly our collection with new products manufactured in accordance with the most advanced lighting solutions. An internal mould construction division means also full control on the quality of our product in all its details and a continuous and regular maintenance of the many existing moulds.

REPARTO COSTRUZIONE STAMPI

Nuovi centri di lavoro dedicati esclusivamente alla costruzione dei nostri stampi, ci permettono di aggiornare costantemente la nostra collezione con numerosi prodotti nuovi, fabbricati secondo le più moderne tecnologie e in accordo con le più recenti soluzioni illuminotecniche. Una divisione interna per la costruzione degli stampi significa anche totale controllo sulla qualità del prodotto nei suoi minimi dettagli e possibilità di effettuare una regolare e costante manutenzione sui numerosi stampi esistenti.





CNC WORKSTATION



WIRE ELECTRICAL DISCHARGE MACHINE



CNC SURFACE GRINDER



CNC WORKSTATION



COMPANY

UP&DOWN

DOWNLIGHT

IN-GROUND

BRICKLIGHT

FLOODLIGHT

BOLLARD

BULKHEAD

GARDEN

URBAN CLASSIC

URBAN MODERN

POST

LAMPS

REFERENCES

COMPANY

FACTORY



INDUSTRIAL PRODUCTION PROCESS IN DIFFERENT PHASES

A successful synergy between the decades-long experience of a qualified staff and the use of modern automatic machineries with the most updated technologies.

PROCESSO DI PRODUZIONE INDUSTRIALE IN DIVERSE FASI

Un'efficace sinergia tra la decennale esperienza di personale qualificato e l'utilizzo di macchinari automatici dotati delle più moderne tecnologie.



PLASMA CUTTING MACHINE



BLACK STEEL WELDING



RESIN DRYERS AND DEHUMIDIFIERS



COMPANY

WAREHOUSE



WAREHOUSE

Fumagalli stock of raw materials, components and semi-finished products is maintained at the best levels to ensure prompt delivery of standard products and fast preparation of special or large quantity orders.

MAGAZZINO

Lo stock Fumagalli di materie prime, componenti e semi-lavorati viene mantenuto a livelli ottimali per assicurare pronte consegne dei prodotti standard ed una veloce esecuzione di richieste speciali o per grandi quantità.



RESIN RAW MATERIAL STOCK



RESIN RAW MATERIAL STOCK

COMPONENTS STOCK



READY POLES STOCK

Stock for projects poles to ensure quick deliveries

3200 poles 2,5mt, 3mt, 4mt, 5mt high- Colours: Classic poles in black. Modern poles in grey.



COMPANY

WAREHOUSE



ASSEMBLY AND ELECTRIFICATION dept.

The assembly, electrification and packing department allows us to ship the products ready for installation to meet customer's needs.

REPARTO DI ASSEMBLAGGIO ED ELETTTRIFICAZIONE

Il reparto di assemblaggio, elettrificazione ed imballaggio ci consente di spedire i nostri prodotti già pronti per l'installazione e personalizzati secondo le necessità del cliente.



AUTOMATIC PACKING MACHINE





BOX STOCK



PACKING



GOODS READY FOR SHIPMENT



COMPANY

TECHNICAL ASSISTANCE





A specialized team of lighting professionals is permanently at our customers' disposal to provide a qualified product technical support, to supply lighting diagrams and to give advice about the optimal article selection and light sources distribution, according to the customer's needs.

In addition, our technical division can provide at any time the following information and services to our worldwide customers:

- photometric data for all Fumagalli diffusers with different wattages: they are available on request in eulumdat, iesna 86/91/95, cibse\1, Itli
- calculation of the average horizontal luminance and of the isolux curves at a given high level
- wind load calculations

From Fumagalli web site www.fumagalli.it it's possible to download the technical specification and the photometric data in .eulumdat or .ies format of all Fumagalli luminaries.

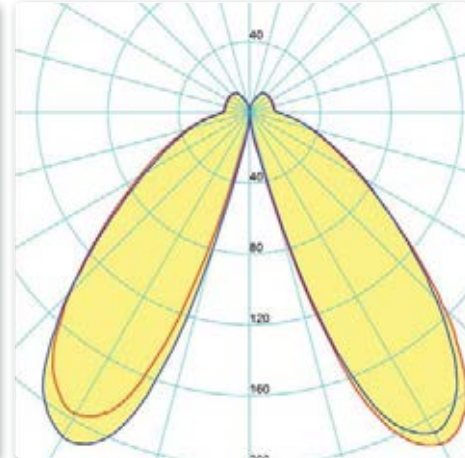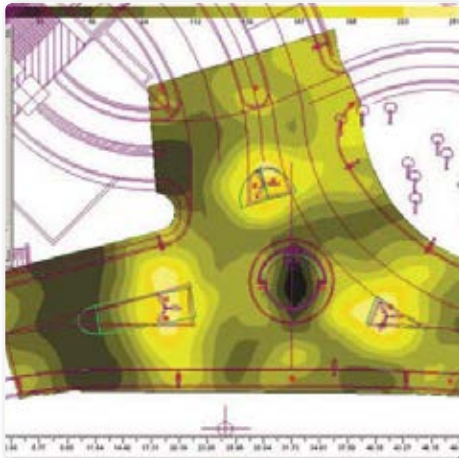

Un team dedicato di professionisti della luce è permanentemente a disposizione dei nostri clienti per fornire un qualificato supporto tecnico relativo al prodotto, per elaborare studi fotometrici e per fornire consigli sulle soluzioni ottimali relative alla selezione degli articoli e alla distribuzione delle sorgenti luminose in una data area.

In aggiunta, il nostro dipartimento tecnico può fornire in ogni momento ai nostri clienti in tutto il mondo le seguenti informazioni e servizi:

- *dati fotometrici di tutti i diffusori Fumagalli con diversi wattaggi: questi sono disponibili su richiesta nei formati eulumdat, iesna 86/91/95, cibse\1, Itli*
- *calcolo dell'illuminamento medio orizzontale e delle curve isolux ad una data altezza*
- *calcoli relativi alla resistenza al vento*

È possibile scaricare dal sito Fumagalli www.fumagalli.it le schede tecniche e le fotometrie di tutti i diffusori Fumagalli in formato .eulumdat o .ies.

New 2500 sqm factory for poles production, fully operational since 2019.

Nuova fabbrica di 2500 m² dedicata alla produzione dei pali, pienamente operativa dal 2019.



New headquarter, warehouse and logistic centre under construction. Covered surface area 18.000 sqm.

Nuovo magazzino, centro logistico e amministrativo attualmente in costruzione. Superficie coperta: 18.000 m².



FUMATECH

FUMAGALLI POLES TECHNOLOGY



Fumagalli created and developed a unique post technology, registered as FUMATECH. Fumatech technology grants to our lamps the same strength features of a metal post, combined with all the advantages in terms of rust and corrosion resistance that only a resin material can offer.


L'azienda Fumagalli ha creato e sviluppato un'esclusiva tecnologia per la fabbricazione dei pali, registrata come FUMATECH. La tecnologia FUMATECH assicura alle nostre lampade le medesime caratteristiche di solidità di un palo in metallo, con tutti i vantaggi in termini di resistenza alla ruggine e alla corrosione che solo la resina può offrire.



METAL POST COVERED BY RESIN

48 YEARS EXPERIENCE

- ✓ Protected against corrosion.
Inattaccabile dalla corrosione.
- ✓ Not-fading colours (UV-rays stabilized).
Colori inalterati nel tempo (stabilizzati ai raggi UV).
- ✓ Double insulated.
Doppio isolamento.
- ✓ Rigid and shockproof.
Rigido e resistente agli urti.
- ✓ Fireproof.
Ignifugo.
- ✓ Light and easy to transport.
Leggero e facile da trasportare.
- ✓ Manufactured according to European Community's standards.
Fabbricato secondo le norme della Comunità Europea.
- ✓ High quality resin polymer sourced in Europe.
Resina polimerica di alta qualità fabbricata in Europa.

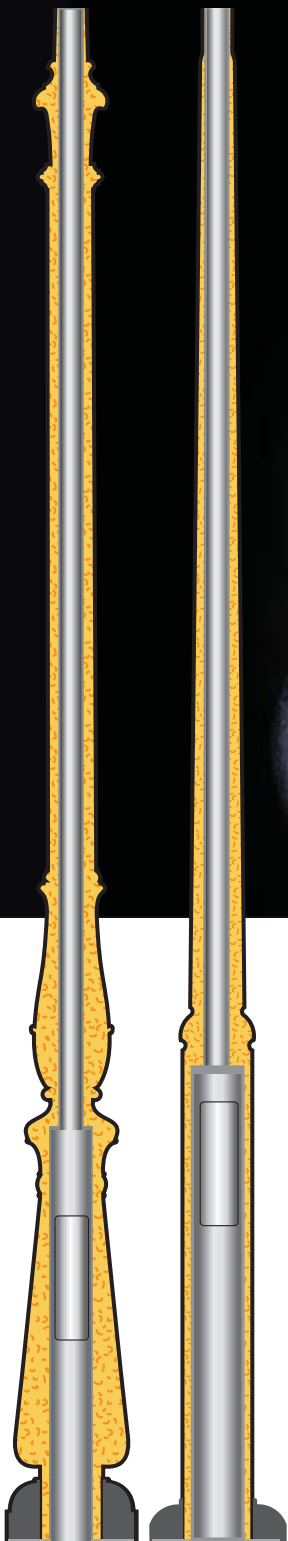

- 1 INNER METAL POLE STRUCTURE**
Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.
- 2 OUTER RESIN COVER**
Outer coating of a single piece without joints made of shockproof resin material:
- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire
- 3 EXPANSE**
High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.





ANTI CORROSION

Thanks to the outer resin material, Fumagalli lamps are protected against rust and corrosion, even if subjected to saline or polluted environments. *Grazie alla resina esterna le lampade Fumagalli sono protette da ruggine e corrosione, anche se esposte ad ambienti salini o inquinati.*



NO MAINTENANCE

The colour of the outer resin coating is molded in the paste of material to grant the maximum durability over the time. No re-painting will ever be necessary. *Il colore della resina esterna è nella pasta stessa del materiale, per garantire la massima durata nel tempo. Non sarà più necessaria alcuna riverniciatura.*



UV-RAYS STABILIZED

Fumagalli products are made of UV stabilized materials to avoid color fading of the outer surface under the sun. Ideal in hot and cold climate. *I prodotti Fumagalli sono realizzati con materiali stabilizzati agli UV per evitare che il colore della superficie esterna sbiadisca con il sole.*



SAFE



CLASS II

The outer resin coating of Fumagalli products isolates the lamp from electrical discharges (double insulation Class II).

Il rivestimento esterno dei prodotti Fumagalli rende la lampada isolata dalle scariche elettriche (doppio isolamento Classe II).



UNAFFECTED BY CHEMICAL FERTILIZERS

Fumagalli lamps are not affected by chemical fertilizer or pollutants.

Le lampade Fumagalli non sono soggette a deterioramento dovuto a fertilizzanti chimici od agenti inquinanti.



CERTIFIED QUALITY



In order to assure the reliability of its manufacturing and marketing process, the company Fumagalli Srl has implemented and maintains a management system, which meets the requirements of the standard ISO 9001:2015, as certified by The International Certification Network IQNET, which is the largest provider of management system certification in the world, and by the Swiss Association for Quality and Management Systems SQS.

Per garantire l'affidabilità del proprio processo produttivo e commerciale, la ditta Fumagalli Srl possiede e mantiene un sistema di gestione aziendale che soddisfa i requisiti della norma ISO 9001:2015, come certificato sia dall'International Certification Network IQNET, che è il più grande organismo al mondo preposto a certificare sistemi di gestione per la qualità, sia dall'Associazione Svizzera per Sistemi di Qualità e di Management SQS.



Fumagalli products obtained also the C-UL-US certification Mark, as they meet the United States National Standard for Luminaires UL1598 and the Canadian National Standard for Luminaires CSA C22.2 No. 250.0.

Fumagalli company is officially registered as a UL classified manufacturer and, upon request, a copy of the UL Certificate of Compliance can be provided to Fumagalli customers, together with the report about the following tests conducted on Fumagalli products: Grounding Continuity Test, Normal Temperature Test, Dielectric Voltage-Withstand Test, Rain Test, Sprinkler Test.

I prodotti Fumagalli hanno ottenuto in via definitiva anche la certificazione C-UL-US, essendo conformi agli standard statunitensi UL1598 per apparecchi illuminanti e agli standard canadesi CSA C22.2 No. 250.0.

La ditta Fumagalli è stata ufficialmente registrata all'interno dell'albo dei fabbricanti certificati UL e, su richiesta, una copia del certificato di conformità UL può essere fornito a tutti i clienti Fumagalli, insieme con i report dei seguenti test condotti sui prodotti Fumagalli: Grounding Continuity Test, Normal Temperature Test, Dielectric Voltage-Withstand Test, Rain Test, Sprinkler Test.





All Fumagalli products are manufactured according to the most updated international standards and regulation and are CE marked in order to ensure to our worldwide customers the highest levels of quality in the full respect of environment and person.

Tutti i prodotti Fumagalli sono fabbricati secondo le più aggiornate norme e standard internazionali e sono marcati CE, in modo da assicurare ai nostri clienti in tutto il mondo i più alti livelli di qualità nel pieno rispetto dell'ambiente e delle persone.



To allow a direct market access of our products in more than 50 countries all over the world, most of Fumagalli products have been tested and certified by third party accredited laboratories within the **IECEE CB scheme** – the most internationally recognized system for Conformity and Certification of Electrotechnical Equipment and Components.

*Per permettere ai nostri apparecchi di avere un accesso diretto in più di 50 paesi in tutto il mondo, una larga parte dei prodotti Fumagalli è stata anche testata e certificata da laboratori terzi accreditati secondo le direttive **IECEE CB** – il sistema di conformità e certificazione più riconosciuto a livello internazionale relativamente ai prodotti e componenti elettrotecnici.*

IECEE Member Countries at present:

- | | | | |
|--|----------------|--|----------------------|
| | Argentina | | Malaysia |
| | Australia | | Mexico |
| | Austria | | Netherlands |
| | Bahrain | | New Zealand |
| | Belarus | | Nigeria |
| | Belgium | | Norway |
| | Brazil | | Pakistan |
| | Bulgaria | | Poland |
| | Canada | | Portugal |
| | China | | Russian Federation |
| | Colombia | | Saudi Arabia |
| | Croatia | | Serbia, Rep.Of |
| | Czech Republic | | Singapore |
| | Denmark | | Slovakia |
| | Finland | | Slovenia |
| | France | | South Africa |
| | Germany | | Spain |
| | Greece | | Sweden |
| | Hungary | | Switzerland |
| | India | | Thailand |
| | Indonesia | | Turkey |
| | Ireland | | Ukraine |
| | Israel | | United Arab Emirates |
| | Italy | | United Kingdom |
| | Japan | | USA |
| | Kenya | | Vietnam |
| | Korea, Rep.Of | | |



Available CB certificates and CB test reports can be provided to Fumagalli customers upon request.

COMPANY

TECHNICAL ASSISTANCE



With the aim of offering to our customers very reliable and safe LED solutions with certified quality and certified performances, all Fumagalli LED lamps (GX53, GU10, G9, E27, R7s) obtained the prestigious TÜV SÜD German certification mark, as they comply with the international standards EN 60968:2015, EN 62031:2008, IEC/TR 62778:2014, IEC 62560:2012/A1:2015, EN 62493:2015. **TÜV Certificate of Compliance** includes also the following test reports:

*Al fine di offrire ai nostri clienti soluzioni a LED affidabili e sicure con qualità e prestazioni certificate, tutte le lampadine a LED Fumagalli (GX53, GU10, G9, E27, R7s) hanno ottenuto la prestigiosa certificazione TÜV SÜD, poichè sono conformi ai seguenti standard internazionali: EN 60968:2015, EN 62031:2008, IEC/TR 62778:2014, IEC 62560:2012/A1:2015, EN 62493:2015. Il **Certificato di Conformità TÜV** include anche i seguenti test report:*

EMC TESTED

EMC Certificate: Fumagalli lamps meet the Electromagnetic Compatibility Directive 2014/30/EU and its amendments.
Certificato EMC: le lampadine Fumagalli sono conformi alla Direttiva di Compatibilità Elettromagnetica 2014/30/EU.

LVD TESTED

LVD Certificate: Fumagalli lamps fulfil the Low Voltage Directive 2014/35/EU, therefore are CE marked and comply with safety requirements like protection against electrical shock, moisture and heat resistance, resistance to flame and ignition.
Certificato LVD: le lampadine Fumagalli rispettano la Direttiva Bassa Tensione 2014/35/EU 2015/1428, sono perciò marchiate CE e conformi a requisiti di sicurezza quali protezione contro scosse elettriche, resistenza al calore e all'umidità, resistenza alla fiamma e alle accensioni.

ERP 6000 h

ERP Attestation of conformity: Fumagalli lamps fulfil the European Ecodesign Directive 2009/125/EC and EU 2015/1428 about the energy performance requirements of energy related products. Lamp lumen maintenance factor after 6.000 hrs > 80%
ERP 6000 ore: le lampadine Fumagalli sono conformi alla Direttiva europea 2009/125/EC e EU sulla progettazione ecocompatibile che stabilisce i requisiti di prestazione energetica (ERP) dei prodotti connessi all'energia. Fattore di mantenimento del flusso luminoso dopo 6000 ore > 80%

CB IECCE CB SCHEME

IECEE CB Certificate: Fumagalli lamps meet the International System for Conformity and Certification of Electrotechnical Equipment allowing direct market access in more than 50 countries all over the world.
Certificato IECEE CB: le lampadine Fumagalli sono conformi al Sistema Internazionale di Conformità e Certificazione dei prodotti e componenti elettrotecnici, che ne garantisce un accesso diretto ai mercati di oltre 50 paesi in tutto il mondo.

RoHS REACH COMPLIANT

RoHS REACH compliant: Fumagalli lamps fulfil the RoHS (Restriction of Hazardous Substances) directive 2011/65/EU and its amendments and the REACH regulation (EC) No. 1907/2006, regarding the concentration of Very High Concern Substances (SVHC).
RoHS and REACH test report: le lampadine Fumagalli sono conformi alla direttiva RoHS 2011/65/EU e ai suoi emendamenti (restrizioni sull'uso di sostanze pericolose) e al regolamento REACH (EC) No. 1907/2006 sulla concentrazione di sostanze ad alto rischio.



catalogue INDEX

product NAME


PHOTO suggested application

category NAME

CURRENT SECTION

PACKAGING DETAILS

CODE NUMBER

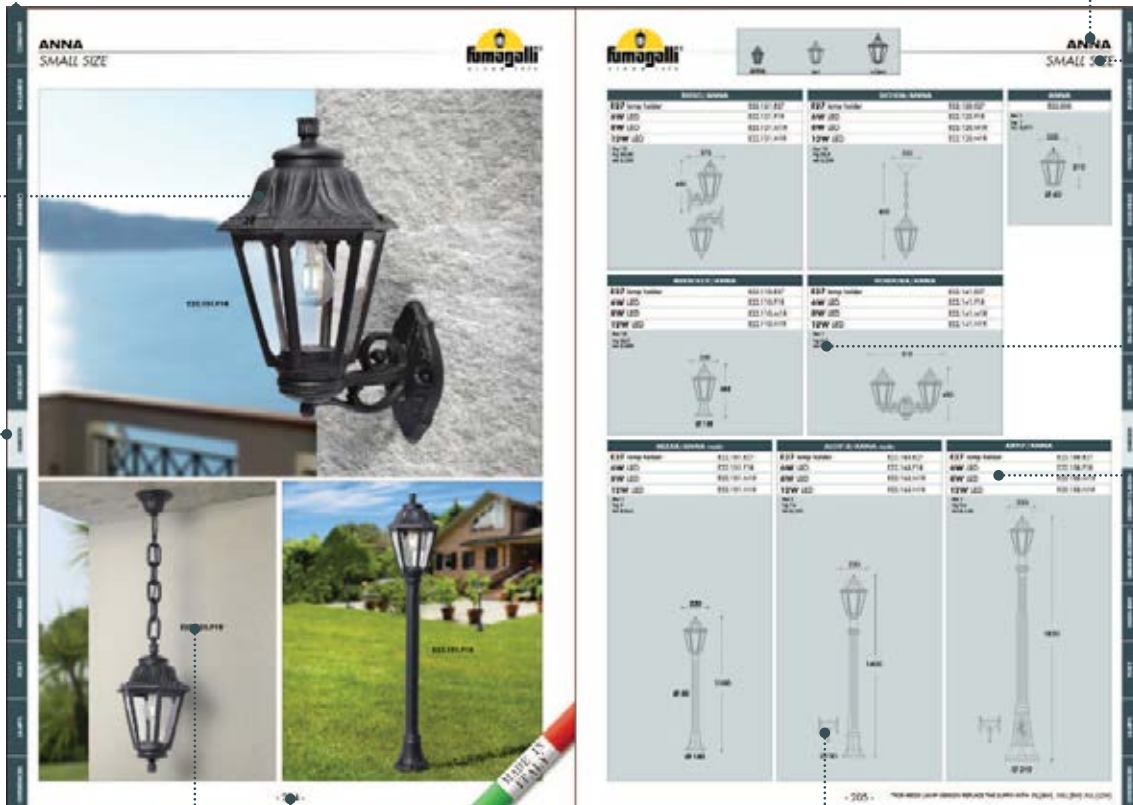

CODE NUMBER

PAGE NUMBER

FIXTURE SIZE AND DRAWINGS

HOW TO READ THE CODES

IDENTIFIES THE COLOUR OF THE STRUCTURE

IDENTIFIES THE COLOUR OF THE DIFFUSER OR THE GLOBE

IDENTIFIES THE STRUCTURE ON WHICH THE DIFFUSER IS MOUNTED (POLE, BRACKET, BASE)

- BLACK A
- WHITE W
- GREY L
- ANTIQUE GREEN* V
- ANTIQUE BRONZE* B

- X CLEAR / FROSTED
- Y OPAL (milky white)
- Z SMOKED (for globes only)
- N GREEN
- R ORANGE
- U BLUE

Q 4 3

2 2 3

N 4 0

V

Y

E 2 7

F C 6

IDENTIFIES THE DIFFUSER

IDENTIFIES THE MULTI-LIGHT SYSTEM IF PRESENT

IDENTIFIES THE TYPE OF ELECTRIFICATION AND THE EVENTUAL PRESENCE OF LED LAMPS

VARIANT- IDENTIFIES THE PRESENCE OF COMPONENTS SUCH AS AN EVENTUAL LOUVRE OR BACKLIT BASE ON THE BULKHEAD RANGE

* hand-made painted colour

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

REFERENCES	LAMPS	POST	URBAN MODERN	URBAN CLASSIC	GARDEN	BULKHEAD	BOLLARD	FLOODLIGHT	BRICKLIGHT	IN-GROUND	DOWNLIGHT	UP&DOWN	COMPANY
------------	-------	------	--------------	---------------	--------	----------	---------	------------	------------	-----------	-----------	---------	---------

MADE IN
ITALY



UP&DOWN

ABRAM

UP & DOWN



Bulkhead lamp with UP&DOWN light emission, available in three different sizes and wattage versions. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamps included**. Insulation class II, Protection rating IP55.

Plafoniera con emissione della luce UP&DOWN, disponibile in tre diverse misure e potenze. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED R7s con Kelvin impostabile, certificata TÜV, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.




AB1.000.J1K

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6





ABRAM - COMPONENTS

IP55



COVER made in shockproof resin material, UV-rays stabilized, rust and corrosion free. Designed for getting up&down light emission. Three different sizes available.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disegnata per ottenere un'emissione bidirezionale della luce. Disponibile in tre diverse misure.

Clear MODULE made in shockproof resin material, UV-rays stabilized, consisting of a cover and a base suitable for the electrical devices fixation. Provided with silicone rubber gasket to ensure high protection against external agents and supplied complete with **R7s led lamp**.

MODULO trasparente realizzato in resina antiurto stabilizzata ai raggi UV, composto da un coperchio e da una base, adatta ad alloggiare gli accessori elettrici. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni e fornito completo di lampadina led R7s.

Wall BASE designed for hosting the led module. Made in shockproof resin material, UV-rays stabilized, rust and corrosion free.

BASE a muro disegnata per accogliere il modulo led. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

ABRAM

— 155/195/265 —



Dimensions and weight

Width: 155/195/265 mm
Height: 120 mm
Depth: 60 mm
Weight: 0,36/0,44/0,60 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Clear

R7s LED

100 - 240 V

*ADD. SUFFIX




	3 W	400 Lm	6500 K 4000 K 2700 K	.J1K
R7s LED				
R7s LED	7,5 W	850 Lm	6500 K 4000 K 2700 K	.K1K
R7s LED	10,5 W	1100 Lm	6500 K 4000 K 2700 K	.P1K

Up&down bulkhead supplied with TÜV certified, long-life, efficient and Kelvin settable R7s LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.


- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** R7s standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ABRAM

UP&DOWN





ABRAM 150 AB1.000.J1K

3W

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 30
Kg 11
mc 0,057

ABRAM 190 AB2.000.K1K

7,5W

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 30
Kg 13,3
mc 0,057

ABRAM 270 AB3.000.P1K

10,5W

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 14
Kg 8,5
mc 0,057

FRANCY

UP & DOWN



Bulkhead lamp with no visible screws and UP&DOWN light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use **included**. Version with motion sensor available. Insulation class II, Protection rating IP66.




*Plafoniera senza viti a vista con emissione della luce UP&DOWN. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con **incluse lampadine LED-CB a filamento** adatte ad uso in ambiente esterno, approvate TÜV, di lunga durata ed elevata efficienza. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.*



1A1.000.F1L





FRANCY - COMPONENTS

IP 66



COVER with no visible screws made of shockproof resin material UV-rays stabilized. Designed for getting UP&DOWN or side light emission.

COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV. Disegnata per ottenere un'emissione laterale della luce.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.

BASE made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided with E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di portalampada E27 e di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

FRANCY



Dimensions and weight

Width: 130 mm
Height: 300 mm
Depth: 90 mm
Weight: 0,7 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27** lampholder. Provided with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use with driver fully protected against heat and humidity by silicone paste.

100 - 240 V

*ADD. SUFFIX

	6 W	800 Lm	4000 K	.F1L
			2700 K	.F1R
	8 W	1000 Lm	4000 K	.M1L
			2700 K	.M1R
	12 W	1500 Lm	4000 K	.N1L
			2700 K	.N1R

E27 with sensor

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27** lampholder and **LED filament lamps** as an option. Complete with microwave daylight and motion **sensor**. Sensor operating voltage: 220-240V. (120V version available on demand).

100 - 240 V

*ADD. SUFFIX

	6 W	800 Lm	4000 K	.S1L
			2700 K	.S1R
	8 W	1000 Lm	4000 K	.T1L
			2700 K	.T1R
	12 W	1500 Lm	4000 K	.V1L
			2700 K	.V1R

LED LAMPS



Technical details on page 552.

6W
8W
12W = 60W
75W
100W
incandescent
SAVE 90%

6W
8W
12W = 60W
75W
100W
incandescent
SAVE 90%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

FRANCY
UP&DOWN




1A1.000.F1R



1A1.000.F1L





FRANCY		
1A1.000.F1L	6W	1A1.000.F1R
1A1.000.M1L	8W	1A1.000.M1R
1A1.000.N1L	12W	1A1.000.N1R
4000K	E27 FILAMENT LED LAMP INCLUDED	2700K
Pcs 24		
Kg 18,2		
mc 0,12		



MARTA 90

UP & DOWN



Up&down bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Available with single opening for one side light emission or with double opening for up&down light emission. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamps**. Insulation class II, Protection rating IP55.

Plafoniera up&down realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura singola ed emissione della luce in una sola direzione o con apertura doppia ed emissione della luce up&down. Fornito nella versione standard con inclusa lampadina a LED GU10 con Kelvin impostabile certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



2A4.000.L2K

CCT SETTABLE

2700 K 4000 K

SDCM <6

CE	UV TREATED	CLASS II	PUBLIC	RESIDENTIAL
RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL	INDOOR-OUTDOOR





MARTA 90 - COMPONENTS

IP55




BODY made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Available with double openings for up&down light emission or with single opening for one side light emission.

CORPO in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura doppia ed emissione della luce UP&DOWN o con apertura singola ed emissione della luce in una sola direzione.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambience.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.



BASE made of shockproof resin material suitable for the electrical devices fixation and provided with single or double GU10 lampholder.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici. Fornita completa di portalampade GU10 singolo o doppio.

MARTA 90

92



Dimensions and weight

Width: 92 mm
Height: 170 mm
Depth: 80 mm
Weight: 0,5 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted Green Orange Blue

GU10 LED

100 - 240 V

*ADD. SUFFIX



		3,5 W	6 W	2x 3,5W 7 W	2x 6W 12 W	350 Lm	600 Lm	700 Lm	1200 Lm	4000 K	2700 K	
MARTA 90-1L												.U1K
												.L1K
MARTA 90-2L												.U2K
												.L2K

Up&down bulkhead supplied as standard with single or double TÜV-CB certified long-life, efficient and Kelvin settable GU10 LED lamps included. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3.5W = 50W
350 Lm HALOGEN
SAVE 92%


6W = 100W
600 Lm HALOGEN
SAVE 95%

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP




CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

MARTA 90

UP & DOWN

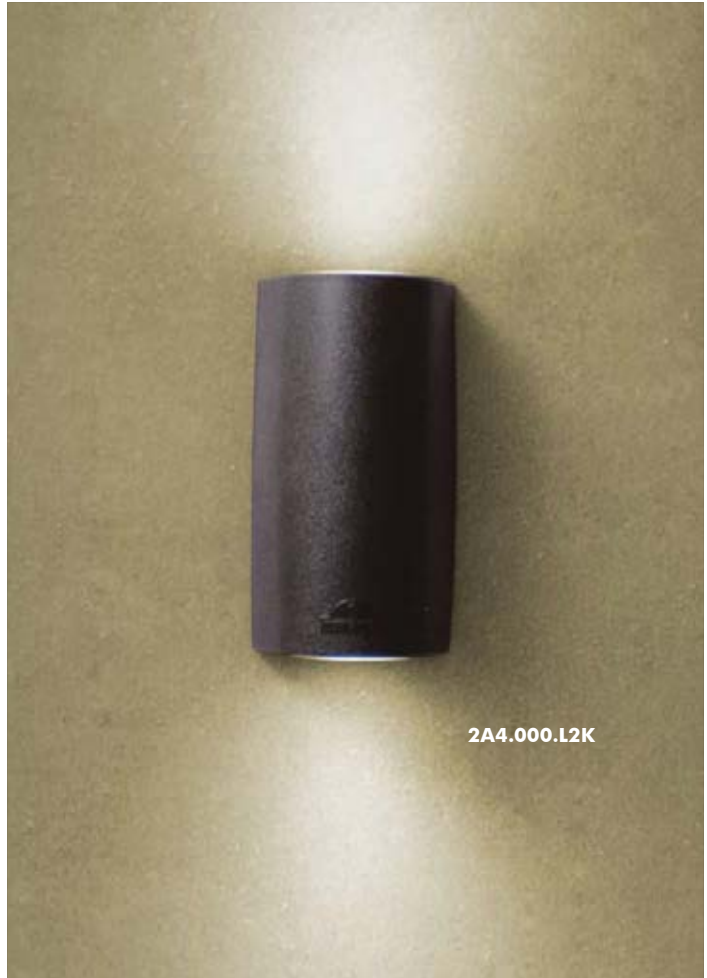



MARTA 90-1L	
3,5W	1A4.000.U1K
6W	1A4.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 36
Kg 17,3
mc 0,12

MARTA 90-2L	
2x3,5W	2A4.000.U2K
2x6W	2A4.000.L2K

2 CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 36
Kg 21,9
mc 0,12

MARTA 160

UP & DOWN



Up&down bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Available with single opening for one side light emission or with double opening for up&down light emission. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Single opening version available also with E27 lampholder. Insulation class II, Protection rating IP55.



*Plafoniera up&down realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura singola ed emissione della luce in una sola direzione o con apertura doppia ed emissione della luce up&down. Fornita con **include lampadine a LED GX53 con kelvin impostabile** certificate TÜV-CB, di lunga durata ed elevata efficienza o provvista di portalampada E27. Classe di isolamento II, grado di protezione IP55.*



2A6.000.WUD2K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

MADE IN ITALY



MARTA 160 - COMPONENTS

IP55




BODY made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Available with double openings for up&down light emission or with single opening for one side light emission.

CORPO in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con apertura doppia ed emissione della luce up&down o con apertura singola ed emissione della luce in una sola direzione.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambience.


DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

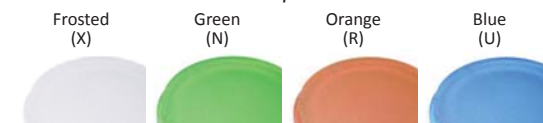

BASE made of shockproof resin material suitable for the electrical devices fixation and provided with single or double GX53 lampholder. For single opening version, the base can be supplied also with E27 lampholder.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici. Fornita completa di portalamпада GX53 singolo o doppio. Nella versione con apertura singola la base può essere fornita anche con portalamпада E27.

MARTA 160



Dimensions and weight

Width: 164 mm
Height: 192 mm
Depth: 145 mm
Weight: 1,1 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted Green Orange Blue

GX53 LED

100 - 240 V

*ADD. SUFFIX



LAMP	W	Lm	*ADD. SUFFIX	
			6500 K	4000 K
MARTA 160-1L GX53 LED	3 W	350 Lm	6500 K	.G1K
			4000 K	
			3000 K	
MARTA 160-2L GX53 LED	7 W	800 Lm	6500 K	.C1K
			4000 K	
			3000 K	
MARTA 160-2L GX53 LED	10 W	1200 Lm	6500 K	.D1K
			4000 K	
			3000 K	
MARTA 160-2L GX53 LED	2x3 W 6 W	700 Lm	6500 K	.G2K
			4000 K	
			3000 K	
MARTA 160-2L GX53 LED	2x7 W 14 W	1600 Lm	6500 K	.C2K
			4000 K	
			3000 K	
MARTA 160-2L GX53 LED	2x10 W 20 W	2400 Lm	6500 K	.D2K
			4000 K	
			3000 K	

Up&Down bulkhead supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.


- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

E27

100 - 240 V

*ADD. SUFFIX



LAMP	W	max 110 mm	*ADD. SUFFIX
MARTA 160-1L E27	E27 (CFL-LED)	↔	.E27


The E27 version is available only with single opening for one side light emission.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

MARTA 160

UP & DOWN

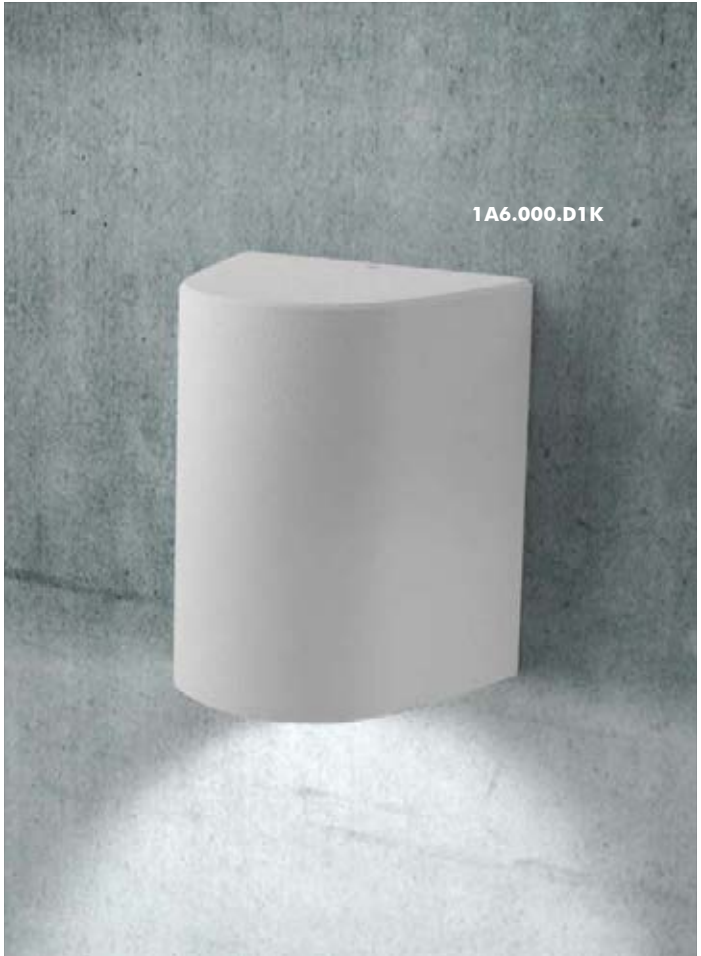

1A6.000.D1K



2A6.000.D2K



2A6.000.LRD2K





MARTA 160-1L GX53

3W	1A6.000.G1K
7W	1A6.000.C1K
10W	1A6.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 26
mc 0,12

MARTA 160-2L GX53

2x3W	2A6.000.G2K
2x7W	2A6.000.C2K
2x10W	2A6.000.D2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 28
mc 0,12

MARTA 160-1L E27

E27 lampholder 1A6.000.E27

Pcs 18
Kg 20
mc 0,12

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES



FRANCA 90

UP & DOWN



LED lamp range in modern style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings or on spike. Wall version available with single opening for one side light emission or with double opening for up&down light emission. Supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GU10 LED lamp included**. Insulation class II, protection rating IP55.

Collezione di lampade a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per installazioni a parete, a soffitto o su picchetto. Disponibile con apertura singola ed emissione della luce in una sola direzione o con apertura doppia ed emissione della luce up&down. Fornita con inclusa lampadina a LED GU10 con Kelvin impostabile, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



3A7.003.U2K


CCT SETTABLE

2700 K 4000 K

SDCM <6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL	CEILING	SPIKE



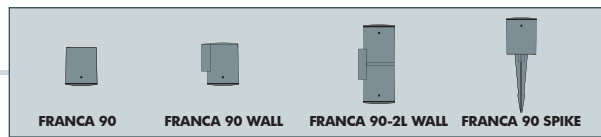

FRANCA 90 - COMPONENTS

IP55




COVER with no visible screws made of shockproof resin material.

COVER senza viti a vista realizzata in resina antiurto.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambience.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

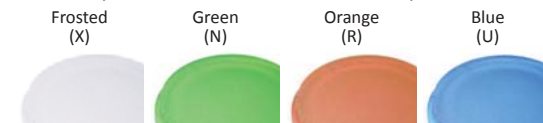

CONNECTION RING made of shockproof resin material, provided with GU10 lampholder.

GHIERA di raccordo realizzata in resina antiurto fornita completa di portalampana GU10.

BODY made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione

INSTALLATION ELEMENTS

- BRACKETS for single or double lights versions
- SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:

- SUPPORTI per installazione a parete con luce singola o doppia
- PICCHETTO per l'installazione nel terreno



Dimensions and weight

Diameter: Ø95 mm
Height: 115 mm
Weight: 0,4 Kg

Moulded colours:



Diffuser PC:





GU10 LED

100 - 240 V

*ADD. SUFFIX



GU10 LED	Power (W)	Lumen (Lm)	Color Temperature (K)	Suffix
	3,5 W	350 Lm	4000 K	.U1K
			2700 K	
	6 W	600 Lm	4000 K	.L1K
			2700 K	

Up&down bulkhead supplied as standard with single or double TÜV-CB certified long-life, efficient and Kelvin settable GU10 LED lamps included. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3.5W 350 Lm = 50W HALOGEN
SAVE 92%



6W 600 Lm = 100W HALOGEN
SAVE 95%




LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP





CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

FRANCA 90

UP & DOWN

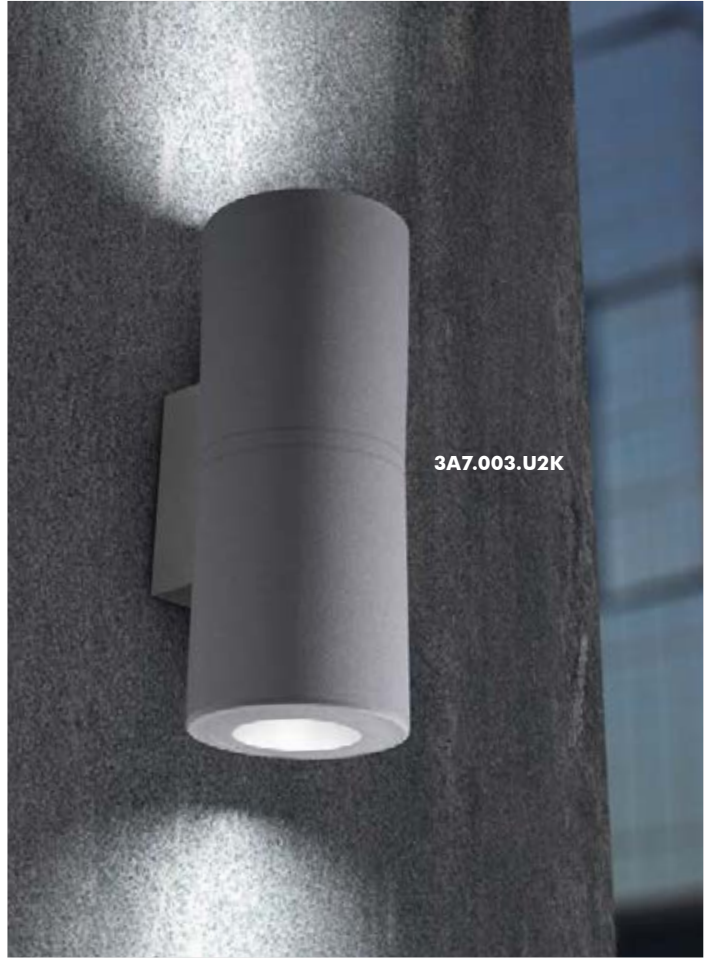

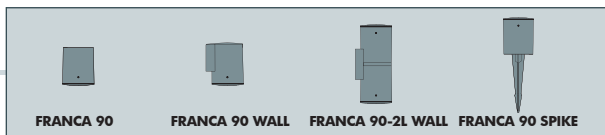

FRANCA 90

3,5W	3A7.000.U1K
6W	3A7.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 12,6
mc 0,09

FRANCA 90 SPIKE

3,5W	3A7.001.U1K
6W	3A7.001.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 13,6
mc 0,09

FRANCA 90-1L WALL

3,5W	3A7.002.U1K
6W	3A7.002.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 13,6
mc 0,09

FRANCA 90-2L WALL

2 x 3,5W	3A7.003.U2K
2 x 6W	3A7.003.L2K

2 CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 22
mc 0,12



DOWNLIGHT

LIVIA 60
DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, and efficient **G9 LED lamps included**. Insulation class II, protection rating IP44.




Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED G9, certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP44.



1A9.000.Z1L







LIVIA 60 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with G9 lampholder.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalampada G9.

DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE satinato in resina antiurto (PC) completo di guarnizione in gomma silicica per garantire un alto livello di protezione contro gli agenti esterni.

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

LIVIA 60



Dimensions and weight

Diameter: Ø60 mm
Height: 69 mm
Weight: 0,10 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

G9 LED

100 - 240 V

*ADD. SUFFIX



	1,7 W	170 Lm	4000 K	.Z1L
			3000 K	.Z1R

Ceiling surface downlight supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** G9 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **100-240V:** wide voltage range to protect the driver from power surges.

LED LAMPS



Technical details on page 552.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA 90
DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamps included**. Insulation class II, protection rating IP 44.



Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a LED GU10 con Kelvin impostabile, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP44.



2A9.000.L1K


CCT SETTABLE

2700 K 4000 K

SDCM <6

RECYCLABLE	ANTISHOCK	TEMPERATURE	CEILING	INDOOR-OUTDOOR





LIVIA 90 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with GU10 lampholder.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalamпада GU10.

DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE satinato in resina antiurto (PC) completo di guarnizione in gomma silconica per garantire un alto livello di protezione contro gli agenti esterni.

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

LIVIA 90



Dimensions and weight

Diameter: Ø96 mm
Height: 105 mm
Weight: 0,26 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

GU10 LED

100 - 240 V

*ADD. SUFFIX



GU10 LED	3,5W	350 Lm	4000 K	.U1K
			2700 K	
GU10 LED	6W	600 Lm	4000 K	.L1K
			2700 K	

Ceiling surface downlight supplied with TÜV-CB certified, long-life and efficient Kelvin settable GU10 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GU10 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3.5W = 50W HALOGEN
350 Lm

SAVE 92%

6W = 100W HALOGEN
600 Lm


SAVE 95%

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA 160

DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Insulation class II, protection rating IP 44.



Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a LED GX53 con Kelvin impostabile, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP44.




3A9.000.D1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





LIVIA 160 - COMPONENTS

IP55



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with GX53 lampholder.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalamпада GX53.


DIFFUSER with frosted finishing made of shockproof resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE satinato in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

LIVIA 160



Dimensions and weight

Diameter: Ø160 mm
Height: 100 mm
Weight: 0,76 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

GX53 LED

100 - 240 V

*ADD. SUFFIX



		3 W	7 W	10 W	6500 K	4000 K	3000 K	
GX53 LED	350 Lm		800 Lm	1200 Lm	6500 K	4000 K	3000 K	.G1K
					4000 K	3000 K		.C1K
					6500 K	4000 K	3000 K	.D1K

Ceiling surface downlight supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3W
350 Lm

SAVE 93%

=

40W
incandescent

7W
10W

SAVE 90%

=


75W
100W
incandescent

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA 180

DOWNLIGHT



LED ceiling surface downlight with no visible screws, suitable for outdoor and indoor installations. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient **E27 high power LED lamps included**. Insulation class II, protection rating IP43.



Lampada a soffitto senza viti a vista adatta sia ad uso esterno che interno. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Completa di lampadine a LED E27 ad ALTA POTENZA, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP43.

4A9.000.Q1L



E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C


90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

RECYCLABLE	ANTISHOCK	TEMPERATURE	CEILING	INDOOR/OUTDOOR





LIVIA 180 - COMPONENTS

IP43



BASE made of shockproof resin material suitable for the electrical devices fixation and provided complete with E27 lampholder. Designed to allow a correct heat dissipation.

BASE in resina antiurto predisposta per il fissaggio degli accessori elettrici e fornita completa di portalamпада E27. Progettato per permettere una corretta dissipazione del calore.

DIFFUSER with frosted finishing made of shockproof resin material (PC).

DIFFUSORE satinato in resina antiurto (PC).

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Quick and easy locking system to the base without screws.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Sistema di aggancio alla base facile e veloce senza l'ausilio di viti.

LIVIA 180



Dimensions and weight

Diameter: Ø180 mm
Height: 200 mm
Weight: 1,10 Kg

Moulded colours:

Black White Grey

Diffuser PC:

Frosted

E27 HIGH POWER LED

100 - 240 V

*ADD SUFFIX



	15 W	1800 Lm	4000 K	.R1L
E27			3000 K	.R1R
E27	30 W	3500 Lm	4000 K	.Q1L
E27			3000 K	.Q1R

Ceiling surface downlight supplied with TÜV certified, long-life, efficient and E27 high power LED lamp included. Different wattages available. Different and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

15W 1800 Lm = 100W incandescent
SAVE 85%

30W 3500 Lm = 50W HQI-SON
SAVE 40%

LED LAMPS




Technical details on page 552.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LIVIA RANGE

DOWNLIGHT





LIVIA 60		
1A9.000.Z1L	1,7W	1A9.000.Z1R
4000K	G9 LED LAMP INCLUDED	3000K

Pcs 50
Kg 13,1
mc 0,057

LIVIA 90	
3.5 W	2A9.000.U1K
6 W	2A9.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 30
Kg 12,6
mc 0,09

LIVIA 160	
3W	3A9.000.G1K
7W	3A9.000.C1K
10W	3A9.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 15,3
mc 0,092

LIVIA 180		
4A9.000.R1L	15W	4A9.000.R1R
4A9.000.Q1L	30W	4A9.000.Q1R

4000K E27 HIGHPOWER LED LAMP INCLUDED 3000K

Pcs 12
Kg 22,5
mc 0,147


TERESA

DOWNLIGHT/DECKLIGHT




Luminaries suitable for downlight and decklight installation with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Insulation class II, protection rating IP 67.

Lampada idonea ad incasso a soffitto e a muro senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornita con inclusa lampadina a LED G9, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



211.000.Z1L

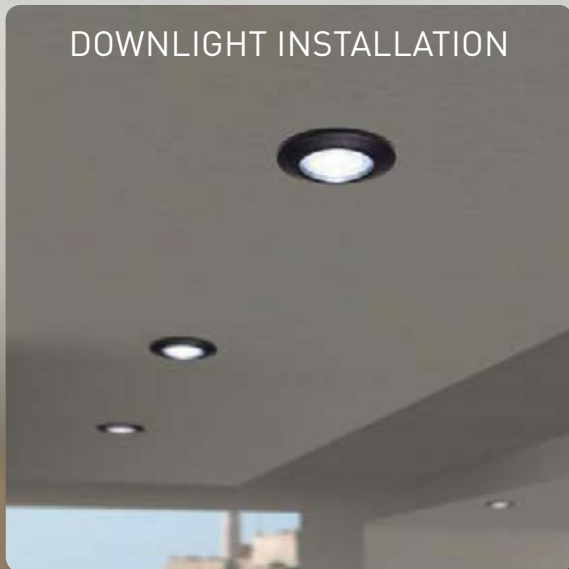



TERESA - COMPONENTS

IP67



METAL SPRING suitable for downlight and deklight installation.


MOLLETTA METALLICA per permettere l'installazione in controsoffitti, pavimenti e divisori in legno.

HOUSING made in shockproof resin material. Provided with G9 lampholder and watertight cable gland for a safe electrical devices connection.

CASSA realizzata in resina antiurto. Provvista di portalampada G9 e pressacavo a tenuta stagna, per consentire una sicura connessione degli accessori elettrici.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.



COVER with no visible screws made in shockproof resin material, UV rays stabilized, rust and corrosion free. Plain (round or square), one-opening or two-opening versions available, for a diffuse or directed light emission.

COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione aperta (quadrata o ad anello), con una apertura o con due aperture, per permettere un'emissione della luce diffusa o direzionata

TERESA



Dimensions and weight
Installation housing depth: 90/70mm
Diameter: Ø 50 mm
Weight: 0,2 Kg

Cover colours:

Black White Grey

Diffuser PC:

Frosted
Blue Green Orange

G9 LED

100 - 240 V

*ADD. SUFFIX



	1,7 W	170 Lm	4000 K	.Z1L
			3000 K	.Z1R

Recessed, downlight or decklight luminaires supplied as standard with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** G9 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **100-240V:** wide voltage range to protect the driver from power surges.

LED LAMPS




Technical details on page 552.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

TERESA

DOWNLIGHT/DECKLIGHT





TERESA

210.000.Z1L **1,7W** 210.000.Z1R

4000K G9 LED LAMP INCLUDED 3000K

Pcs 50
Kg 13,1
mc 0,057

TERESA SQUARE

214.000.Z1L **1,7W** 214.000.Z1R

4000K G9 LED LAMP INCLUDED 3000K

Pcs 50
Kg 13,1
mc 0,057

TERESA 1L

2L1.000.Z1L **1,7W** 2L1.000.Z1R

4000K G9 LED LAMP INCLUDED 3000K

Pcs 50
Kg 13,1
mc 0,057

TERESA 2L

2L2.000.Z1L **1,7W** 2L2.000.Z1R

4000K G9 LED LAMP INCLUDED 3000K

Pcs 50
Kg 13,1
mc 0,057



- COMPANY
- UP&DOWN
- DOWNLIGHT
- IN-GROUND
- BRICKLIGHT
- FLOODLIGHT
- BOLLARD
- BULKHEAD
- GARDEN
- URBAN CLASSIC
- URBAN MODERN
- POST
- LAMPS
- REFERENCES

IN-GROUND

ALDO

IN-GROUND/RECESSED





Luminaries suitable for in-ground and wall recessed installation with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Insulation class II, protection rating IP 67.

Lampada idonea ad incasso a terra e a muro senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornita con inclusa lampadina a LED G9, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



111.000.Z1L

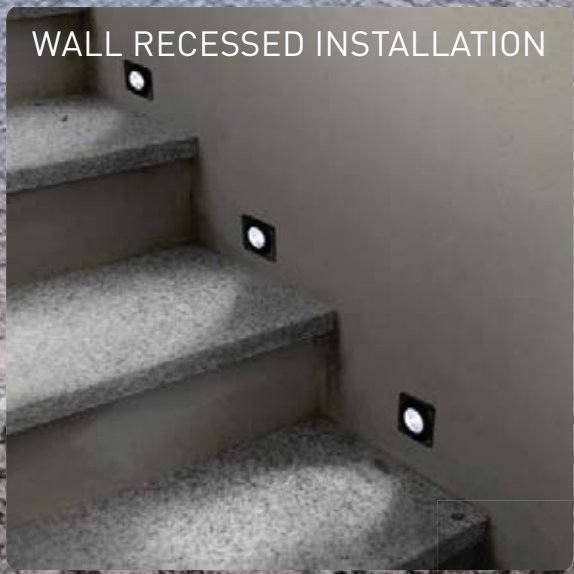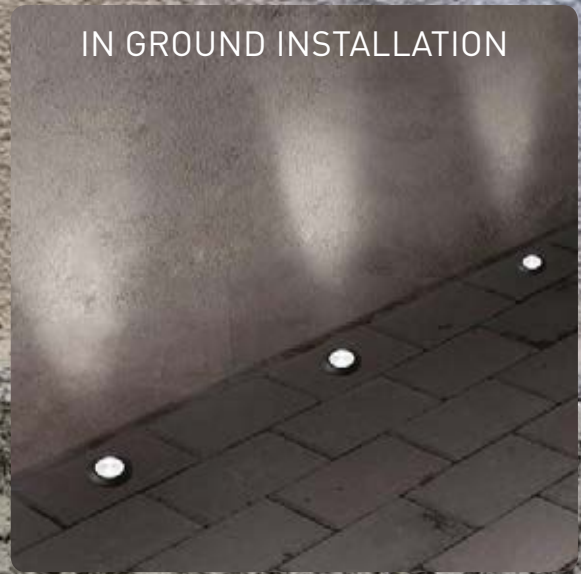



ALDO - COMPONENTS



IP67


COVER with no visible screws made in shockproof resin material, UV rays stabilized, rust and corrosion free. Plain (round or square), one-opening or two-opening versions available, for a diffuse or directed light emission.



COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nella versione aperta (quadrata o ad anello), con una apertura o con due aperture, per permettere un'emissione della luce diffusa o direzionata

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

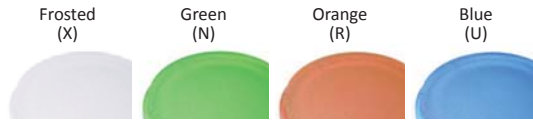

HOUSING made in shockproof resin material. Provided with G9 lampholder and watertight cable gland for a safe electrical devices connection.

CASSA realizzata in resina antiurto. Provvista di portalampada G9 e pressacavo a tenuta stagna, per consentire una sicura connessione degli accessori elettrici.

INSTALLATION HOUSING made in shockproof resin material to be fixed into the ground or cemented into the wall before installing the luminaries. In case of wall-recessed installation, the housing can be cut to reduce its depth.

CONTRO-CASSA in resina antiurto da fissare al suolo o da cementare nel muro prima dell'installazione degli apparecchi. Nel caso di installazione a muro, la cassa può essere tagliata per ridurre la sua profondità.

ALDO




Dimensions and weight
Installation housing depth: 110/70mm
Diameter: Ø 50 mm
Weight: 0,2 Kg

Cover colours:



Diffuser PC:



G9 LED

100 - 240 V

*ADD. SUFFIX



	1,7 W	170 Lm	4000 K	.Z1L
			3000 K	.Z1R

In-ground or wall recessed luminaries supplied as standard with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** G9 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **100-240V:** wide voltage range to protect the driver from power surges.

LED LAMPS



Technical details on page 552.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ALDO

IN-GROUND/RECESSED





ALDO

110.000.Z1L **1,7W** 110.000.Z1R

4000K G9 LED LAMP INCLUDED 3000K

Pcs 50
Kg 13,1
mc 0,057

ALDO SQUARE

114.000.Z1L **1,7W** 114.000.Z1R

4000K G9 LED LAMP INCLUDED 3000K

Pcs 50
Kg 13,1
mc 0,057

ALDO 1L

111.000.Z1L **1,7W** 111.000.Z1R

4000K G9 LED LAMP INCLUDED 3000K

Pcs 50
Kg 13,1
mc 0,057

ALDO 2L

112.000.Z1L **1,7W** 112.000.Z1R

4000K G9 LED LAMP INCLUDED 3000K

Pcs 50
Kg 13,1
mc 0,057

CECI 90
IN-GROUND



Drive-over in-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Insulation class II, Protection rating IP67.



Apparecchio per incasso a terra carrabile e senza viti a vista, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornito con inclusa lampadina a LED GU10 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



1F1.000.U1K

CCT SETTABLE

2700 K 4000 K

SDCM <6





CECI 90 - COMPONENTS



IP67




COVER with no visible screws made of shockproof resin material, UV rays stabilized, rust and corrosion free. Round or square design, 2 or 3 light versions available for a diffuse or directed light emission.



COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nelle versioni quadrata o ad anello, a 2 aperture e a 3 aperture per permettere un'emissione della luce diffusa o direzionata.

DIFFUSER made of high impact and high-pressure load resistant resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambience.

DIFFUSORE in resina antiurto altamente resistente al carico (PC), completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

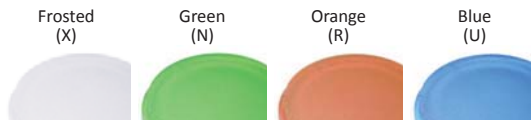

HOUSING made of shockproof resin material, provided with double holes and double watertight cable glands for safe connecting cable.

CASSA realizzata in resina antiurto, provvista di doppi fori e doppio pressacavo a tenuta stagna, per consentire in maniera sicura l'ingresso e l'uscita delle connessioni elettriche.

INSTALLATION HOUSING made of shockproof resin material to be fixed into the ground before installing the luminaries.

CONTRO-CASSA in resina antiurto da fissare al suolo prima dell'installazione degli apparecchi.

CECI 90



Dimensions and weight

Installation housing depth: 127 mm
Diameter: Ø 92 mm
Weight: 0,35 Kg

Cover colours:

Black Grey

Diffuser PC:

Frosted
Blue Green Orange

LED LAMPS



Technical details on page 552.

GU10 LED

100 - 240 V

*ADD. SUFFIX



GU10 LED	Power	Lumen	Color Temp	Suffix
3,5W	350 Lm	4000 K	.U1K	
		2700 K		
6W	600 Lm	4000 K	.L1K	
		2700 K		


In-ground supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GU10 LED lamp included. Different wattage available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GU10 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste

3.5W 350 Lm = 50W HALOGEN
SAVE 92%

6W 600 Lm = 100W HALOGEN
SAVE 95%

CCT SETTABLE LED LAMP




CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

CECI 90
IN-GROUND



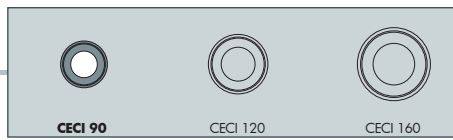

CECI 90	
3,5W	1F1.000.U1K
6W	1F1.000.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 40 Kg 13,7 mc 0,084	

CECI 90-3L	
3,5W	1F3.000.U1K
6W	1F3.000.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 40 Kg 13,7 mc 0,084	

CECI 90-2L	
3,5W	1F2.000.U1K
6W	1F2.000.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 40 Kg 13,7 mc 0,084	

CECI 90-SQ	
3,5W	1F4.000.U1K
6W	1F4.000.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 40 Kg 13,7 mc 0,084	

CECI 120

IN-GROUND



Driver-over in-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Insulation class II, Protection rating IP67.



Apparecchio per incasso a terra carrabile e senza viti a vista, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornito con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



2F1.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6



CECI 120 - COMPONENTS



IP67



COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Round or square design, 2 or 3 light versions available for a diffuse or directed light emission.



COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nelle versioni quadrata o ad anello, a 2 aperture e a 3 aperture per permettere un'emissione della luce diffusa o direzionata.

DIFFUSER made of high impact and high-pressure load resistant resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto altamente resistente al carico (PC), completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

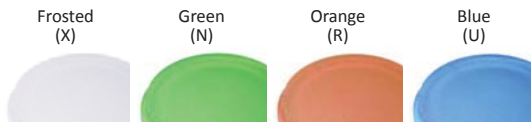

HOUSING made of shockproof resin material, provided with double holes and double watertight cable glands for safe connecting cable.

CASSA realizzata in resina antiurto, provvista di doppi fori e doppio pressacavo a tenuta stagna, per consentire in maniera sicura l'ingresso e l'uscita delle connessioni elettriche.

INSTALLATION HOUSING made of shockproof resin material to be fixed into the ground before installing the luminaries.

CONTRO-CASSA in resina antiurto da fissare al suolo prima dell'installazione degli apparecchi.

CECI 120



Dimensions and weight
Installation housing depth: 93 mm
Diameter: Ø 120 mm
Weight: 0,45 Kg

Cover colours:

 Black  Grey

Diffuser PC:

 Frosted
 Blue  Green  Orange

LED LAMPS



Technical details on page 552.

GX53 LED

100 - 240 V

*ADD. SUFFIX



3 W

350 Lm

6500 K	.G1K
4000 K	
3000 K	

3W 350 Lm = 40W incandescent


SAVE 93%



In-ground supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

CCT SETTABLE LED LAMP

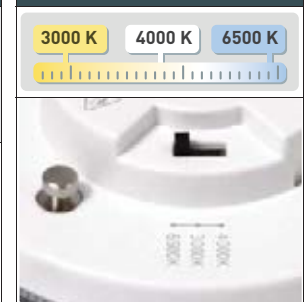

CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

CECI 120
IN-GROUND



2F3.000.AUG1K



2F1.000.G1K




2F4.000.G1K



2F2.000.LUG1K



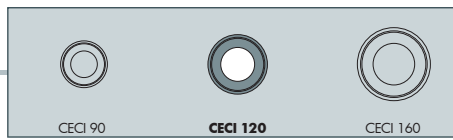

CECI 120 2F1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 15,7
mc 0,084

CECI 120-3L 2F3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 15,7
mc 0,084

CECI 120-2L 2F2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 15,7
mc 0,084

CECI 120-SQ 2F4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 15,7
mc 0,084

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

CECI 160

IN-GROUND



Drive-over in-ground luminaries with no visible screws, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round or square shape available with several cover versions. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Insulation class II, Protection rating IP67.



Apparecchio per incasso a terra carrabile e senza viti a vista, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile con forma quadrata o circolare in diverse versioni di cover. Fornito con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



3F3.000.D1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





CECI 160 - COMPONENTS



IP67




COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Round or square design, 2 or 3 light versions available for a diffuse or directed light emission.



COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile nelle versioni quadrata o ad anello, a 2 aperture e a 3 aperture per permettere un'emissione della luce diffusa o direzionata.

DIFFUSER made of high impact and high-pressure load resistant resin material (PC), complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambience.

DIFFUSORE in resina antiurto altamente resistente al carico (PC), completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.



HOUSING made of shockproof resin material, provided with double holes and double watertight cable glands for safe connecting cable.

CASSA realizzata in resina antiurto, provvista di doppi fori e doppio pressacavo a tenuta stagna, per consentire in maniera sicura l'ingresso e l'uscita delle connessioni elettriche.

INSTALLATION HOUSING made of shockproof resin material to be fixed into the ground before installing the luminaries.

CONTRO-CASSA in resina antiurto da fissare al suolo prima dell'installazione degli apparecchi.

CECI 160



Dimensions and weight
Installation housing depth: 111 mm
Diameter: Ø 160 mm
Weight: 0,8 Kg

Cover colours:



Diffuser PC:



LED LAMPS



Technical details on page 552.

GX53 LED

100 - 240 V

*ADD. SUFFIX



	7 W	800 Lm	6500 K	.C1K
			4000 K	
	10 W	1200 Lm	3000 K	.D1K
			6500 K	
			4000 K	
			3000 K	

In-ground supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

7W 800 Lm = 75W incandescent
SAVE 90%



10W 1200 Lm = 100W incandescent
SAVE 90%



CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

CECI 160
IN-GROUND



3F2.000.AUD1K



3F1.000.C1K




3F4.000.C1K



3F3.000.C1K



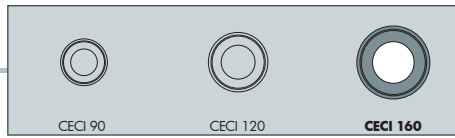

CECI 160

7W	3F1.000.C1K
10W	3F1.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 14,3
mc 0,084

CECI 160-3L

7W	3F3.000.C1K
10W	3F3.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 14,3
mc 0,084

CECI 160-2L

7W	3F2.000.C1K
10W	3F2.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 14,3
mc 0,084

CECI 160-SQ

7W	3F4.000.C1K
10W	3F4.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 14,3
mc 0,084



REFERENCES

LAMPS

POST

URBAN MODERN

URBAN CLASSIC

GARDEN

BULKHEAD

BOLLARD

FLOODLIGHT

BRICKLIGHT

IN-GROUND

DOWNLIGHT

UP&DOWN

COMPANY

BRICKLIGHT

NINA

RECESSED LAMP




Slim and compact recessed wall lamp with rectangular shape and no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV certified, long-life, efficient, and Kelvin settable R7s LED lamps included. Three different sizes and wattage versions available. Insulation class II, Protection rating IP55.



NINA 150
6C1.000



NINA 190
7C1.000



NINA 270
8C1.000

Lampada rettangolare a LED per incasso a muro dal design compatto e sottile senza viti a vista. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED R7s con Kelvin impostabile, certificata TÜV, di lunga durata ed elevata efficienza. Disponibile in tre diverse misure e potenze. Classe di isolamento II, grado di protezione IP55.




6C1.000.J1K

CCT SETTABLE

2700 K 4000 K 6500 K


SDCM <6



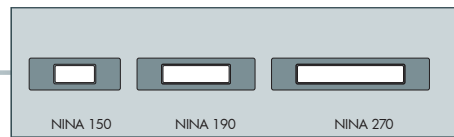


NINA - COMPONENTS

IP55

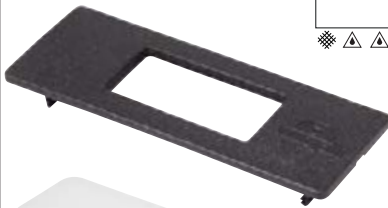

COVER with no visible screws and slim design, made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Three different sizes available.

COVER dal design sottile e senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in tre diverse misure.

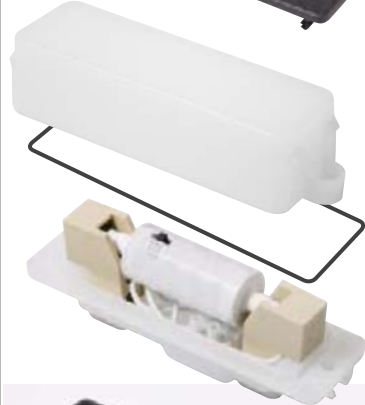

Opal MODULE made of shockproof resin material, UV-rays stabilized, consisting of a cover and a base suitable for the electrical devices fixation. Provided with silicone rubber gasket to ensure high protection against external agents and supplied complete with **R7s led lamp**.

MODULO opale realizzato in resina antiurto stabilizzata ai raggi UV, composto da un coperchio e da una base, adatta ad alloggiare gli accessori elettrici. Provvisto di guarnizione in gomma silconica per garantire un alto livello di protezione contro gli agenti esterni e fornito completo di lampadina led R7s.



INSTALLATION HOUSING made of shockproof resin material, to be cemented into the wall before installing the luminaries. Compact size and reduced depth allowing both outdoor and indoor installation.

CONTRO-CASSA in resina antiurto da cementare nel muro prima dell'installazione degli apparecchi. Il design compatto e la profondità ridotta ne permettono l'installazione sia all'esterno che all'interno.

NINA



Dimensions and weight
Width: 145/185/255 mm
Height: 50 mm
Installation housing depth: 50 mm
Weight: 0,26/0,31/0,72 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:




Opal

R7s LED

100 - 240 V

*ADD. SUFFIX



 R7s LED	3 W	400 Lm	6500 K	.J1K	
			4000 K		
			2700 K		
 R7s LED	7,5 W	850 Lm	6500 K	.K1K	
			4000 K		
			2700 K		
 R7s LED	10,5 W	1100 Lm	6500 K	.P1K	
			4000 K		
			2700 K		

Recessed light supplied with TÜV certified, long-life, efficient and Kelvin settable R7s LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.


- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** R7s standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

NINA
RECESSED LAMP



6C1.000.J1K




7C1.000.K1K



8C1.000.P1K



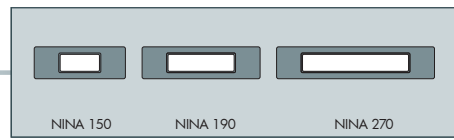


NINA 150

3W

6C1.000.J1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

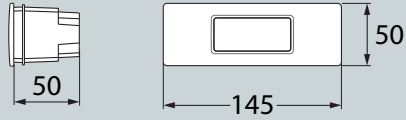


Pcs 50
Kg 13,1
mc 0,057

NINA 190

7,5W

7C1.000.K1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

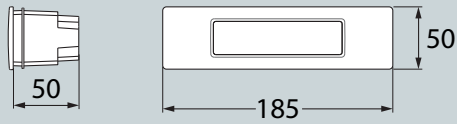


Pcs 50
Kg 15,7
mc 0,057

NINA 270

10,5W

8C1.000.P1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

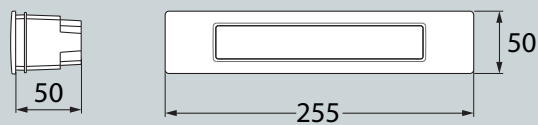

Pcs 30
Kg 21,6
mc 0,057

LORENZA

SURFACE LAMP



Surface wall lamp with square or rectangular shape and downwards directed light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Available in three different sizes and wattage versions. Supplied with TÜV certified, long-life, efficient and Kelvin settable R7s LED lamps included. Insulation class II, Protection rating IP55



Lampada LED a muro dalla forma quadrata o rettangolare con emissione della luce diretta verso il basso. Realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in tre diverse misure e potenze. Fornita con inclusa lampadina a LED R7s con Kelvin impostabile, certificata TÜV, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.




AS1.000.J1K

CCT SETTABLE

2700 K 4000 K 6500 K


SDCM <6



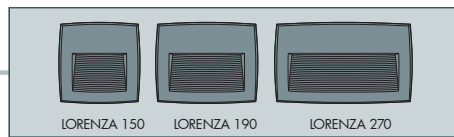

LORENZA - COMPONENTS

IP55

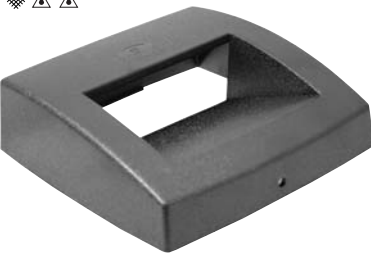

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Designed for hosting the led module, getting downwards directed light emission. Three different sizes available.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disegnata per accogliere il modulo led e consentire un'emissione della luce diretta verso il basso. Disponibile in tre diverse misure.



Clear MODULE made of shockproof resin material, UV-rays stabilized, consisting of a cover and a base suitable for the electrical devices fixation. Provided with silicone rubber gasket to ensure high protection against external agents and supplied complete with **R7s led lamp**.

MODULO trasparente realizzato in resina antiurto stabilizzata ai raggi UV, composto da un coperchio e da una base, adatta ad alloggiare gli accessori elettrici. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni e fornito completo di **lampadina led R7s**.



Wall BASE made of shockproof resin material, UV-rays stabilized, rust and corrosion free.

BASE a muro, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

LORENZA

— 150/190/270 —



Dimensions and weight

Width: 150/190/260 mm
Height: 150 mm
Depth: 45 mm
Weight: 0,47/0,55/0,78 Kg

Moulded colours:

Black White Grey

Diffuser PC:




Clear

R7s LED

100 - 240 V

*ADD. SUFFIX



	3 W	400 Lm	6500 K 4000 K 2700 K	.J1K
 R7s LED 78				
	7,5 W	850 Lm	6500 K 4000 K 2700 K	.K1K
 R7s LED 118				
	10,5 W	1100 Lm	6500 K 4000 K 2700 K	.P1K
 R7s LED 189				

Surface light supplied with TÜV certified, long-life, efficient and **Kelvin settable R7s LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.


- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** R7s standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LORENZA
SURFACE LAMP



AS1.000.J1K




AS2.000.K1K



AS3.000.P1K



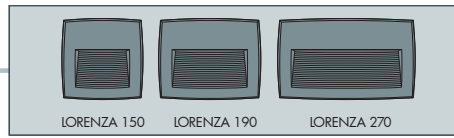

LORENZA 150

3W AS1.000.J1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 24
Kg 11,3
mc 0,057

LORENZA 190

7,5W AS2.000.K1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 24
Kg 13,4
mc 0,057

LORENZA 270

10,5W AS3.000.P1K

CCT SETTABLE R7s LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 14
Kg 11
mc 0,057

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

LETI 100 ROUND

RECESSED LAMP



Recessed wall lamp with round shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada LED per incasso a muro con forma circolare, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornito con inclusa lampadina a LED GX53 con Kelvin regolabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



LETI 100 ROUND
2C1.000



LETI 100 ROUND-GR
2C2.000



LETI 100 ROUND-EL
2C3.000



LETI 100 ROUND-ST
2C4.000



2C1.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6



LETI 100 ROUND - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

HOUSING made of shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

CASSA realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di lampadina led GX53.

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 100 ROUND



Dimensions and weight

Diameter: Ø 134 mm
Installation housing depth: 80 mm
Weight: 0,4 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

GX53 LED

100 - 240 V

*ADD. SUFFIX



	3 W	350 Lm	6500 K	.G1K
			4000 K	
			3000 K	

Recessed lamp supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.




3W 350 Lm = 40W incandescent
SAVE 93%

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LETI 100 ROUND

RECESSED LAMP



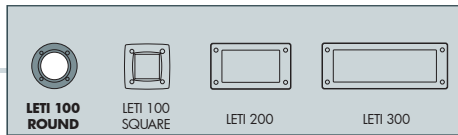

LETI 100 ROUND 2C1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-GR 2C2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-EL 2C3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 ROUND-ST 2C4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12


LETI 100 SQUARE

RECESSED LAMP



Recessed wall lamp with square shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada ad incasso a muro con forma quadra, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornito con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.

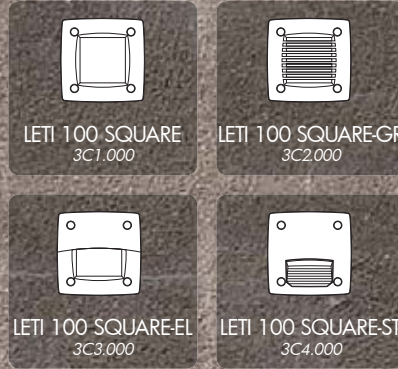

3C1.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTISHOCK	TEMPERATURE	RECESSED	



LETI 100 SQUARE - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

HOUSING made of shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

CASSA realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di lampadina led GX53.

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

CONTRO-CASSA in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.

LETI 100 SQUARE



Dimensions and weight

Height: 115 mm
Width: 115 mm
Installation housing depth: 80 mm
Weight: 0,4 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

GX53 LED

100 - 240 V

*ADD. SUFFIX



	3 W	350 Lm	6500 K	.G1K
			4000 K	
			3000 K	

Recessed lamp supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

3W 350 Lm = 40W incandescent


SAVE 93%

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LETI 100 SQUARE

RECESSED LAMP



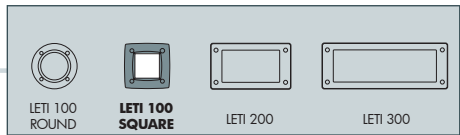

LETI 100 SQUARE 3C1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 SQUARE-GR 3C2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 SQUARE-EL 3C3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

LETI 100 SQUARE-ST 3C4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

LETI 200

RECESSED LAMP



Recessed wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada ad incasso a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



4C4.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTISHOCK	TEMPERATURE	RECESSED	



LETI 200 - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

***COVER** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*

High quality silicone rubber **GASKET** to ensure high protection against external agents.

***GUARNIZIONE** in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

HOUSING made of shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

***CASSA** realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di lampadina led GX53.*

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

***CONTRO-CASSA** in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.*

LETI 200



Dimensions and weight
Height: 113 mm
Width: 188 mm
Installation housing depth: 98 mm
Weight: 0,6 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

GX53 LED

100 - 240 V

*ADD. SUFFIX



	3 W	350 Lm	6500 K	.G1K
			4000 K	
			3000 K	

Recessed lamp supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.


3W
350 Lm

=


40W
 incandescent


SAVE 93%

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LETI 200

RECESSED LAMP



4C1.000.G1K



4C2.000.G1K



4C3.000.G1K




4C4.000.G1K



4C5.000.G1K





LETI 200 4C1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-GL 4C2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-RS 4C3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-HS 4C4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-VP 4C5.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES


LETI 300

RECESSED LAMP



Recessed wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **2x Kelvin settable GX53 LED lamps included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada LED per incasso a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con **include 2 lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*

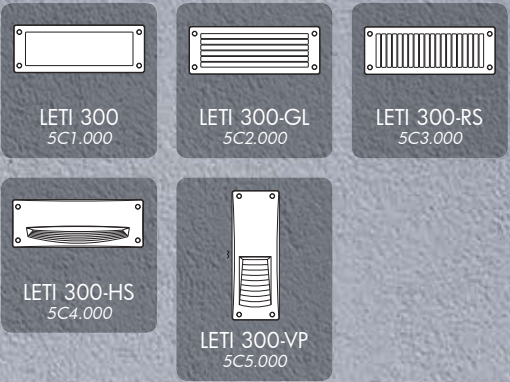

5C4.000.G2K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTISHOCK	TEMPERATURE	RECESSED	



LETI 300 - COMPONENTS



IP66

COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

***COVER** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).


***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*

HOUSING made of shockproof resin material, suitable for the electrical devices fixation. Provided with **2x GX53 led lamps** or with E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

***CASSA** realizzata in resina antiurto, adatta ad alloggiare gli accessori elettrici. Fornita completa di **2 lampadine led GX53** o di portalamпада E27 e guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

***CONTRO-CASSA** in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.*

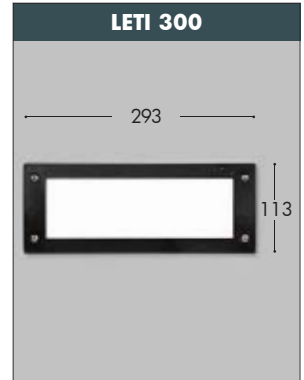

LETI 300

Dimensions and weight
Height: 113 mm
Width: 293 mm
Installation housing depth: 98 mm
Weight: 0,9 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:


Opal

GX53 LED



Recessed lamp supplied complete with 2x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

100 - 240 V			*ADD. SUFFIX
	2x 3W 6W	700 Lm	6500 K 4000 K 3000 K .G2K

2x 3W = 6W
700 Lm incandescent

SAVE 90% 

E27



Recessed lamp supplied complete with E27 lampholder.


E27 (CFL -LED)	max 160 mm ↔	*ADD. SUFFIX .E27
--------------------------	-----------------	----------------------

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LETI 300

RECESSED LAMP



5C1.000.G2K

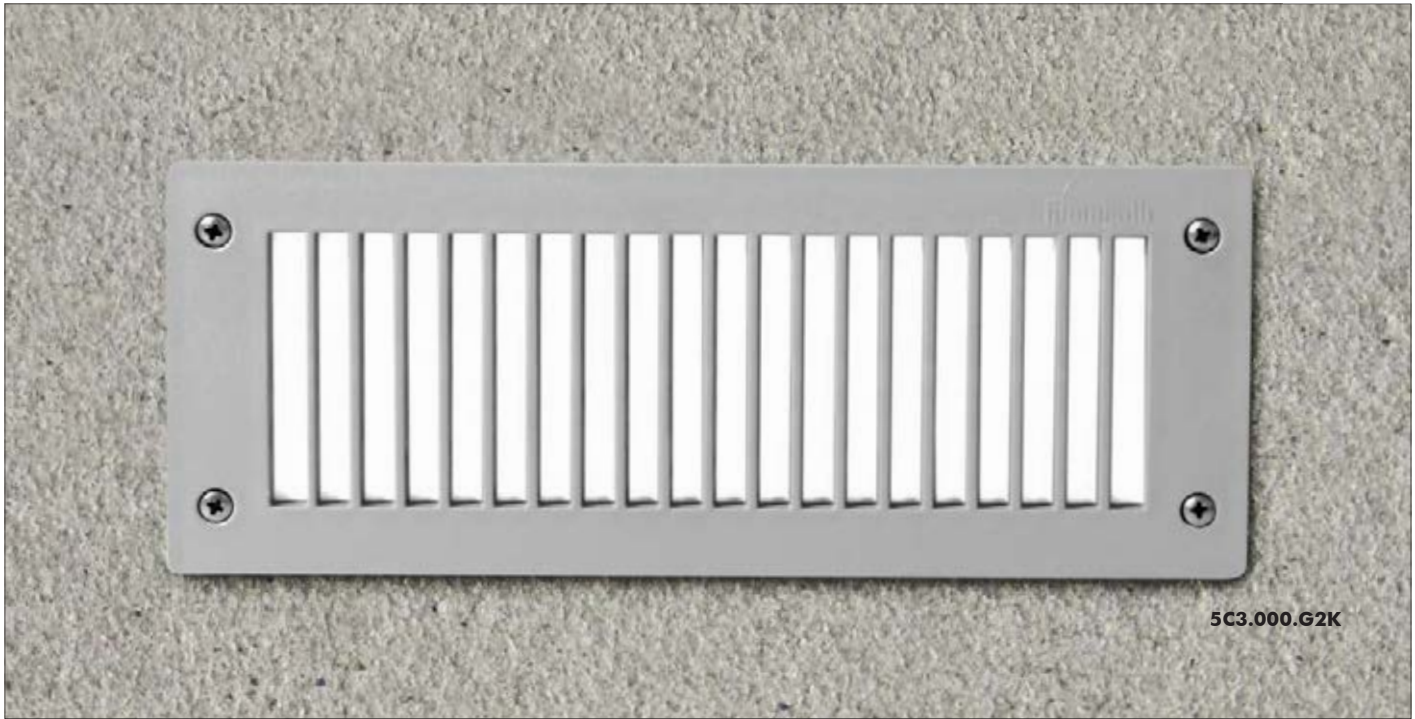

5C3.000.G2K



5C2.000.G2K




5C4.000.G2K



5C5.000.G2K





LETI 300 5C1.000.G2K

6W

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-GL 5C2.000.G2K

6W

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-RS 5C3.000.G2K

6W

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-HS 5C4.000.G2K

6W

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

LETI 300-VP 5C5.000.G2K

6W

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 24
Kg 22,7
mc 0,12

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

EXTRALETI 100 ROUND

SURFACE LAMP



Surface wall lamp with round shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp 3W-350lm included. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.




Lampada a muro con forma circolare, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53 3W-350lm con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.

 <p>EXTRALETI 100 ROUND 251.000</p>	 <p>EXTRALETI 100 ROUND-GR 252.000</p>
 <p>EXTRALETI 100 ROUND-EL 253.000</p>	 <p>EXTRALETI 100 ROUND-ST 254.000</p>



• 253.000.G1K

CCT SETTABLE

SDCM <6



EXTRALETI 100 ROUND - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.

Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.

High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di **lampadina led GX53**.

EXTRALETI 100 ROUND

Ø 140



Dimensions and weight

Diameter: Ø 140 mm
Depth: 64/85 mm
Weight: 0,5 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:


Opal

GX53 LED

100 - 240 V

*ADD. SUFFIX



	3 W	350 Lm	6500 K	.G1K
			4000 K	
			3000 K	

Surface lamp supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.




3W 350 Lm = **40W** incandescent
SAVE 93%

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMP
REFERENCES

EXTRALETI 100 ROUND

SURFACE LAMP



251.000.G1K



254.000.G1K



252.000.G1K



253.000.G1K



EXTRALETI 100 ROUND

3W 2S1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 ROUND-GR

3W 2S2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 ROUND-EL

3W 2S3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 ROUND-ST

3W 2S4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

EXTRALETI 100 SQUARE

SURFACE LAMP



Surface wall lamp with square shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 4 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada a muro con forma quadra, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53 con kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 4 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



EXTRALETI 100 SQUARE
351.000



EXTRALETI 100 SQUARE-GR
352.000



EXTRALETI 100 SQUARE-EL
353.000



EXTRALETI 100 SQUARE-ST
354.000



354.000.G1K

CCT SETTABLE



MADE IN ITALY

EXTRALETI 100 SQUARE - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

COVER realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.



Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.



High quality silicone rubber **GASKET** to ensure high protection against external agents.

GUARNIZIONE in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di lampadina led GX53.



EXTRALETI 100 SQUARE



Dimensions and weight

Height: 120 mm
Width: 120 mm
Depth: 64/85 mm
Weight: 0,5 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:


Opal

GX53 LED

100 - 240 V

*ADD. SUFFIX



	3 W	350 Lm	6500 K	.G1K
			4000 K	
			3000 K	

Surface lamp supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.




3W 350 Lm = 40W incandescent
SAVE 93%

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

EXTRALETI 100 SQUARE

SURFACE LAMP



3S1.000.G1K



3S3.000.G1K



3S4.000.G1K



3S2.000.G1K



EXTRALETI 100 SQUARE

3W 3S1.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 SQUARE-GR

3W 3S2.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 SQUARE-EL

3W 3S3.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

EXTRALETI 100 SQUARE-ST

3W 3S4.000.G1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 48
Kg 20,3
mc 0,12

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

EXTRALETI 200

SURFACE LAMP



Surface wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



451.000.G1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTISHOCK	TEMPERATURE	WALL	



EXTRALETI 200 - COMPONENTS

IP 66




COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

***COVER** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*



Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*



High quality silicone rubber **GASKET** to ensure high protection against external agents.

***GUARNIZIONE** in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*



BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53 led lamp**.

***CORPO** realizzato in resina antiurto, stabilizzata ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di lampadina led GX53.*

EXTRALETI 200



Dimensions and weight

Height: 120 mm
Width: 200 mm
Depth: 65/85 mm
Weight: 0,7 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:


Opal

GX53 LED

100 - 240 V

*ADD. SUFFIX



	3 W	350 Lm	6500 K	.G1L
			4000 K	
			3000 K	

Surface lamp supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.




3W 350 Lm = 40W incandescent
SAVE 93%

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

EXTRALETI 200

SURFACE LAMP



4S2.000.G1K



4S1.000.G1K



4S4.000.G1K




4S3.000.G1K



4S5.000.G1K



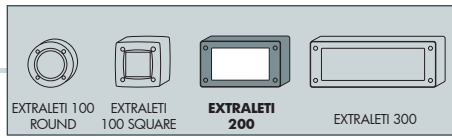

EXTRALETI 200 4S1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-GL 4S2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-RS 4S3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-HS 4S4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-VP 4S5.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

EXTRALETI 300

SURFACE LAMP



Surface wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with 2 x TÜV-CB certified long-life, efficient and Kelvin settable GX53 LED lamps included. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

Lampada a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con incluse 2 lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



551.000.G2K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6



EXTRALETI 300 - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

***COVER** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*

High quality silicone rubber **GASKET** to ensure high protection against external agents.

***GUARNIZIONE** in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with 2x GX53 led lamps.

***CORPO** realizzato in resina antiurto, stabilizzato ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di 2 lampadine led GX53.*

EXTRALETI 300



Dimensions and weight

Height: 120 mm
Width: 300 mm
Depth: 65 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:


Opal

GX53 LED

100 - 240 V

*ADD. SUFFIX



	2x 3W 6W	700 Lm	6500 K	.G2L
			4000 K	
			3000 K	

2x 3W = **60W** incandescent
700 Lm

SAVE 90%



Surface lamp supplied complete with 2 x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

NEW VERSION WITH SLIMMER BODY




LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

EXTRALETI 300

SURFACE LAMP



551.000.G2K



554.000.G2K



552.000.G2K




553.000.G2K



555.000.G2K



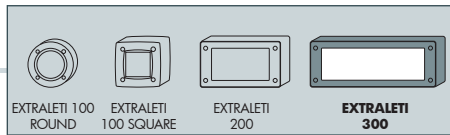

EXTRALETI 300

6W 5S1.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 20
Kg 19
mc 0,14

EXTRALETI 300-GL

6W 5S2.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 20
Kg 19
mc 0,14

EXTRALETI 300-RS

6W 5S3.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 20
Kg 19
mc 0,14

EXTRALETI 300-HS

6W 5S4.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 12
Kg 11
mc 0,14

EXTRALETI 300-VP

6W 5S5.000.G2K

2 CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 12
Kg 11
mc 0,14



FLOODLIGHT

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

MINITOMMY

FLOODLIGHT



LED floodlight with single or double lights made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings, in the ground or on spikes. Ring or eyelid cover versions available with no visible screws. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. The floodlight is fully adjustable and it can tilt and turn at will. Insulation class II, Protection rating IP66.



Proiettore a LED a luce singola o doppia fabbricato in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto, al suolo o su picchetto, sia in ambienti esterni che interni. Cover ad anello o a palpebra senza viti a vista. Fornito nella versione standard con inclusa lampadina a LED GU10 con Kelvin impostabile certificata TÜV-CB di lunga durata ed elevata efficienza. Il proiettore è completamente regolabile e si può inclinare e orientare a piacimento. Classe di isolamento II, grado di protezione IP66.



1M1.001.U1K

CCT SETTABLE

2700 K 4000 K

SDCM <6

UV-TREATED DOUBLE INSULATION +90° -60° PUBLIC RESIDENTIAL INDOOR/OUTDOOR WALL CEILING SPIKE



MINITOMMY - COMPONENTS

IP 66




COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Ring or eyelid versions available.

COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Disponibile nella versione ad anello o a palpebra.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

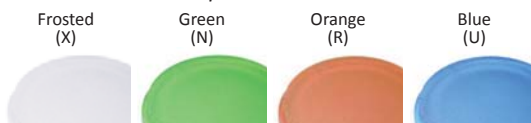

Resin **BODY** suitable for the electrical devices fixation and resin **SUPPORT FORK** to allow a fully adjustable floodlight position.

CORPO in resina predisposto per il fissaggio degli accessori elettrici e **FORCELLA** di supporto per permettere l'orientamento del proiettore.

INSTALLATION ELEMENTS:

- ROTATION DISK for surface installation.
- SPIKE for in ground installation.
- CONNECTION FITTING for double lights version.

ELEMENTI DI FISSAGGIO:

- DISCO DI ROTAZIONE per l'installazione a parete.
- PICCHETTO per l'installazione nel terreno.
- SUPPORTO per la versione a luce doppia.

MINITOMMY



Dimensions and weight

Height: 127 mm
Width: 122 mm
Weight: 0,45 Kg


Moulded Colours:

Black Grey White

Diffuser PC:

Frosted
Blue Green Orange

LED LAMPS



Technical details on page 552.

GU10 LED

100 - 240 V

*ADD. SUFFIX



GU10 LED	3,5W	350 Lm	4000 K	.U1K
			3000 K	
GU10 LED	6W	600 Lm	4000 K	.L1K
			3000 K	


Floodlight supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GU10 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GU10 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3.5W = 50W
350 Lm HALOGEN
SAVE 92%

6W = 100W
600 Lm HALOGEN
SAVE 95%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

MINITOMMY


FLOODLIGHT



1M1.001.L1K




3M1.001.U2K

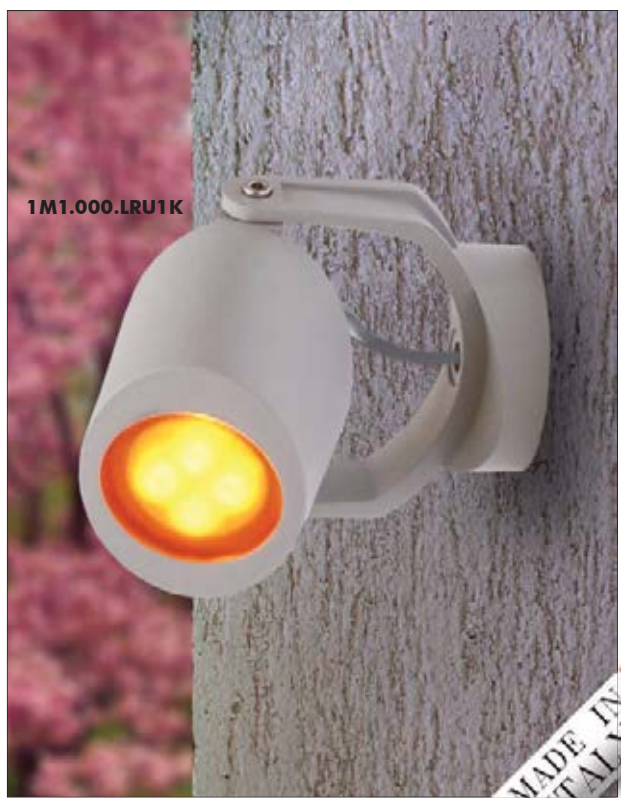

1M1.000.LRU1K





MINITOMMY	
3,5W	1M1.000.U1K
6W	1M1.000.L1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K	
<p>Pcs 30 Kg 12,6 mc 0,092</p>	

MINITOMMY SPIKE	
3,5W	1M1.001.U1K
6W	1M1.001.L1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K	
<p>Pcs 30 Kg 13,8 mc 0,092</p>	

MINITOMMY 2L	
2x3,5W	3M1.000.U2K
2x6W	3M1.000.L2K
2 CCT SETTABLE GX53 LED LAMPS INCLUDED 2700K/4000K	
<p>Pcs 18 Kg 16,2 mc 0,092</p>	

MINITOMMY 2L SPIKE	
2x3,5W	3M1.001.U2K
2x6W	3M2.000.L2K
2 CCT SETTABLE GX53 LED LAMPS INCLUDED 2700K/4000K	
<p>Pcs 18 Kg 17 mc 0,092</p>	

MINITOMMY-EL

FLOODLIGHT




1M2.001.U1K



3M2.001.L2K





MINITOMMY-EL	
3,5W	1M2.000.U1K
6W	1M2.000.L1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K	
Pcs 30 Kg 12,6 mc 0,092	

MINITOMMY-EL SPIKE	
3,5W	1M2.001.U1K
6W	1M2.001.L1K
CCT SETTABLE GX53 LED LAMP INCLUDED 273000K/4000K	
Pcs 30 Kg 13,8 mc 0,092	

MINITOMMY-EL 2L	
2x3,5W	3M2.000.U2K
2x6W	3M2.000.L2K
2 CCT SETTABLE GX53 LED LAMPS INCLUDED 2700K/4000K	
Pcs 18 Kg 16,2 mc 0,092	

MINITOMMY-EL 2L SPIKE	
2x3,5W	3M2.001.U2K
2x6W	3M2.001.L2K
2 CCT SETTABLE GX53 LED LAMPS INCLUDED 2700K/4000K	
Pcs 18 Kg 17 mc 0,092	

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES





TOMMY

FLOODLIGHT



LED floodlight with single or double lights made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings, in the ground or on spikes. Square, ring or eyelid cover versions available with no visible screws. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. The floodlight is fully adjustable and it can tilt and turn at will. Insulation class II, Protection rating IP66.

Proiettore a LED a luce singola o doppia fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto, al suolo o su picchetto, sia in ambienti esterni che interni. Cover quadrata, ad anello o a palpebra senza viti a vista. Fornito con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB di lunga durata ed elevata efficienza. Il proiettore è completamente regolabile e si può inclinare e orientare a piacimento. Classe di isolamento II, grado di protezione IP66.



2M1.001.D1K




CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL	CEILING	SPIKE





TOMMY - COMPONENTS

IP 66




COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Ring or eyelid versions available.

COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Disponibile nella versione ad anello o a palpebra.

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.

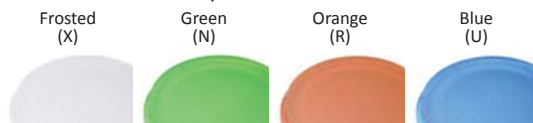

Resin **BODY** suitable for the electrical devices fixation and resin **SUPPORT FORK** to allow a fully adjustable floodlight position.

CORPO in resina predisposto per il fissaggio degli accessori elettrici e **FORCELLA** di supporto per permettere l'orientamento del proiettore.

INSTALLATION ELEMENTS:

- ROTATION DISK for surface installation.
- SPIKE for in ground installation.
- CONNECTION FITTING for double lights version.

ELEMENTI DI FISSAGGIO:

- DISCO DI ROTAZIONE per l'installazione a parete.
- PICCHETTO per l'installazione nel terreno.
- SUPPORTO per la versione a luce doppia.

TOMMY



Dimensions and weight

Height: 165 mm
Width: 152 mm
Weight: 0,8 Kg

Moulded Colours:

Black Grey White

Diffuser PC:

Frosted
Blue Green Orange

LED LAMPS



Technical details on page 552.

GX53 LED

100 - 240 V

*ADD SUFFIX



	3 W	350 Lm	6500 K	.G1K
			4000 K	
			3000 K	
	7 W	800 Lm	6500 K	.C1K
			4000 K	
			3000 K	
	10 W	1200 Lm	6500 K	.D1K
			4000 K	
			3000 K	


Floodlight supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

3W 350 Lm = 40W incandescent
SAVE 93%

7W 10W = 75W 100W incandescent
SAVE 90%

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

TOMMY
FLOODLIGHT



MADE IN
ITALY



TOMMY	
3W	2M1.000.G1K
7W	2M1.000.C1K
10W	2M1.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 15,3
mc 0,092

TOMMY SPIKE	
3W	2M1.001.G1K
7W	2M1.001.C1K
10W	2M1.001.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 16
mc 0,092

TOMMY 2L	
2x3W	4M1.000.G2K
2x7W	4M1.000.C2K
2x10W	4M1.000.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

Pcs 8
Kg 13,9
mc 0,092

TOMMY 2L SPIKE	
2x3W	4M1.001.G2K
2x7W	4M1.001.C2K
2x10W	4M1.001.D2K


2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

Pcs 8
Kg 14,2
mc 0,092

TOMMY-EL

FLOODLIGHT





TOMMY-EL

3W	2M2.000.G1K
7W	2M2.000.C1K
10W	2M2.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 15,3
mc 0,092

TOMMY-EL SPIKE

3W	2M2.001.G1K
7W	2M2.001.C1K
10W	2M2.001.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 16
mc 0,092

TOMMY-EL 2L

2x3W	4M2.000.G2K
2x7W	4M2.000.C2K
2x10W	4M2.000.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

Pcs 8
Kg 13,9
mc 0,092

TOMMY-EL 2L SPIKE

2x3W	4M2.001.G2K
2x7W	4M2.001.C2K
2x10W	4M2.001.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K


Pcs 8
Kg 14,2
mc 0,092

TOMMY-SQ

FLOODLIGHT



MADE IN ITALY



TOMMY-SQ	
3W	5M1.000.G1K
7W	5M1.000.C1K
10W	5M1.000.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 15,3
mc 0,092

TOMMY-SQ SPIKE	
3W	5M1.001.G1K
7W	5M1.001.C1K
10W	5M1.001.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 16
mc 0,092

TOMMY-SQ 2L	
2x3W	6M1.000.G2K
2x7W	6M1.000.C2K
2x10W	6M1.000.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

Pcs 8
Kg 13,9
mc 0,092

TOMMY-SQ 2L SPIKE	
2x3W	6M1.001.G2K
2x7W	6M1.001.C2K
2x10W	6M1.001.D2K

2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

Pcs 8
Kg 14,2
mc 0,092

GIOVA/GERMANA

FLOODLIGHT

Rectangular floodlight with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ground installation. Provided complete with a fully adjustable bracket to direct the light emission. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with **E27** lampholder. Motion sensor version available. Insulation class II, Protection rating IP66.



Proiettore rettangolare senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete e al suolo. Fornito completo di braccio che permette l'orientamento del proiettore in qualsiasi posizione. Provvisto di lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione E27. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.




2N1.702.C2K

CCT SETTABLE

SDCM < 6

3000 K 4000 K 6500 K





GIOVA/GERMANA - COMPONENTS

IP 66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.


COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



BRACKET made of shockproof resin material, UV-rays stabilized, to allow a fully adjustable position of the floodlight.

BRACCIO realizzato in resina antiurto, stabilizzato ai raggi UV, che permette l'orientamento in qualsiasi posizione del proiettore

GIOVA/GERMANA



Dimensions and weight

Height: 280 mm
Width: 180 mm
Weight: 1,6 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

2x GX53 LED

FULLY PRE-WIRED



Floodlight supplied **fully pre-wired** complete with 2x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

		100 - 240 V		*ADD. SUFFIX
	2x 3W 6W	700 Lm	6500 K	.G2K
			4000 K	
			3000 K	
	2x 7W 14W	1600 Lm	6500 K	.C2K
			4000 K	
			3000 K	
	2x 10W 20W	2400 Lm	6500 K	.D2K
			4000 K	
			3000 K	

2x 10W = 50W
2.400 Lm SON-HQI

SAVE 60%

E27

FULLY PRE-WIRED



Floodlight supplied **fully pre-wired** with white resin reflective ceiling designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.
Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


E27 (CFL -LED)	max 160 mm	.P27
E27 + Sensor (CFL -LED)	max 160 mm	.PS7

LED LAMPS



Technical details on page 552.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE




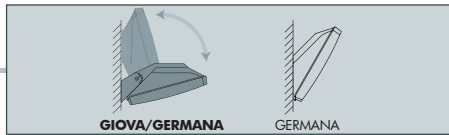

GIOVA/GERMANA GX53

6W	2N1.702.G2K
14W	2N1.702.C2K
20W	2N1.702.D2K


2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K

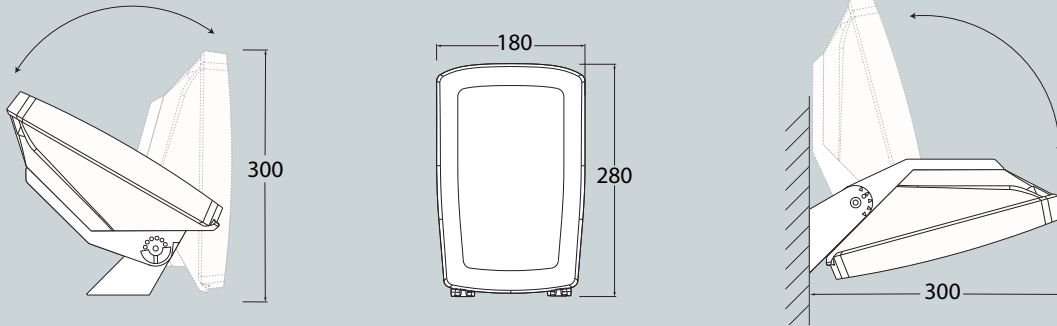

Pcs 18
Kg 29,8
mc 0,198

GIOVA/GERMANA E27

E27 lampholder	2N1.702.P27
E27 with sensor	2N1.702.PS7

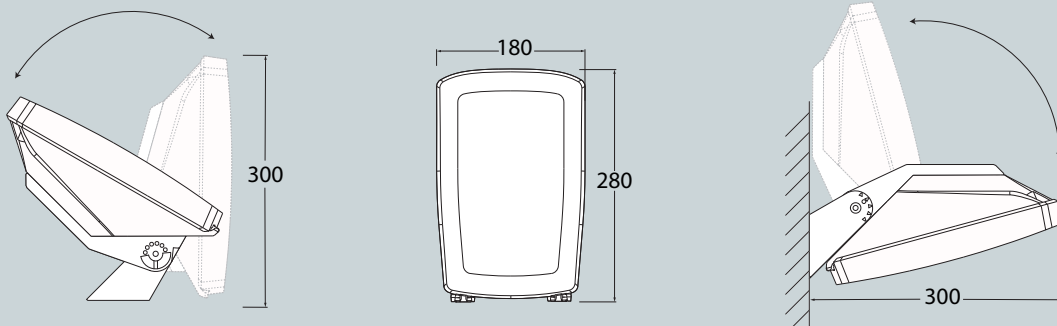

Pcs 18
Kg 21,7
mc 0,198

GERMANA

FLOODLIGHT

Rectangular floodlight with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and post installation. Supplied with TÜV-CB certified, long-life efficient and Kelvin settable GX53 LED lamps included or provided with E27 lampholder. Motion sensor version available. Insulation class II, Protection rating IP66.

Proiettore rettangolare senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete e a palo. Provvisto di lampadine a LED GX53 con kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza o fornito nella versione E27. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.




CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





GERMANA - COMPONENTS

IP 66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

GERMANA



Dimensions and weight

Height: 280 mm
Width: 180 mm
Weight: 1,4 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

2x GX53 LED



Floodlight supplied **fully pre-wired** complete with 2x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

		100 - 240 V		*ADD. SUFFIX
	2x 3W 6W	700 Lm	6500 K	.G2K
			4000 K	
			3000 K	
	2x 7W 14W	1600 Lm	6500 K	.C2K
			4000 K	
			3000 K	
	2x 10W 20W	2400 Lm	6500 K	.D2K
			4000 K	
			3000 K	

2x 10W = 50W
2.400 Lm SON-HQI

SAVE 60%

E27



Floodlight supplied **fully pre-wired** with white resin reflective ceiling designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side. *Daylight and motion sensor* available as an option. Sensor operating voltage: 220-240V (120V available on demand).


E27 (CFL -LED)	max 160 mm	.P27
E27 + Sensor (CFL -LED)	max 160 mm	.PS7

LED LAMPS



Technical details on page 552.


CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE







GERMANA GX53

6W	2N1.000.G2K
14W	2N1.000.C2K
20W	2N1.000.D2K



2 CCT SETTABLE GX53 LED LAMPS INCLUDED
3000K/4000K/6500K



Pcs 18
Kg 26,2
mc 0,198

GERMANA E27

E27 lampholder	2N1.000.P27
E27 with sensor	2N1.000.PS7



Pcs 18
Kg 18,1
mc 0,198

BOLLARD VERSION



Detailed information on page 194.

GIOVA/GIUSEPPE

FLOODLIGHT

Square floodlight with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall, ground and post installation. Provided complete with a fully adjustable bracket to direct the light emission. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with **2x E27 lampholders**. Motion sensor version available. Insulation class II, Protection rating IP66.



*Proiettore quadro senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a suolo e a palo. Provvisto completo di braccio che permette l'orientamento del proiettore in qualsiasi posizione. Fornito con **include lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione **2x E27**, anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.*

4P1.702.B1K



CCT SETTABLE

2700 K 3000 K 4000 K 6500 K

SDCM <6





GIOVA/GIUSEPPE - COMPONENTS



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.


COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV.

DIFFUSER made of UV-rays stabilized polymethyl-methacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.


CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.



BRACKET made of shockproof resin material, UV-rays stabilized, to allow a fully adjustable position of the floodlight.

BRACCIO realizzato in resina antiurto, stabilizzato ai raggi UV, che permette l'orientamento in qualsiasi posizione del proiettore.

GIOVA/GIUSEPPE



Dimensions and weight

Height: 150 mm
Width: 300 mm
Weight: 3 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

LED LAMPS



Technical details on page 552.

4x GX53 LED



4P2.702

Floodlight supplied **wit white resin reflective ceiling fully pre-wired** and complete with 4 x TÜV-CB certified long-life efficient and Kelvin settable **GX53 LED lamps included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V				*ADD. SUFFIX
GX53 LED	4x 7W 28W	3200 Lm	6500 K	.C4K
			4000 K	
			3000 K	
	4x 10W 40W	4800 Lm	6500 K	.D4K
			4000 K	
			3000 K	

4x 10W = 100W
4800 Lm SON-HQI

SAVE 60%

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6

GX53 LED



4P1.702

Floodlight supplied **fully pre-wired** and complete with TÜV approved, long-life and efficient and Kelvin settable **GX53 LED lamp** in different wattages.

100 - 240 V				*ADD. SUFFIX
GX53 LED	7 W	800 Lm	6500 K	.A1K
			4000 K	
			2700 K	
GX53 LED	11 W	1300 Lm	6500 K	.B1K
			4000 K	
			2700 K	
GX53 LED	18 W	2000 Lm	6500 K	.E1K
			4000 K	
			2700 K	
GX53 LED + SENSOR	7 W	800 Lm	6500 K	.ASK
			4000 K	
			2700 K	
GX53 LED + SENSOR	11 W	1300 Lm	6500 K	.BSK
			4000 K	
			2700 K	
GX53 LED + SENSOR	18 W	2000 Lm	6500 K	.ESK
			4000 K	
			2700 K	

7W 11W 18W = 60W 100W 150W
incandescence

SAVE 90%

2x E27



4P2.702

Floodlight supplied **fully pre-wired** with white resin reflective ceiling and complete with **2x E27 lampholders**.

Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

100 - 240 V			*ADD. SUFFIX
2x E27 (CFL-LED)	max 160 mm	↔	.E28
2x E27 + SENSOR	max 160 mm	↔	.ES8

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE






GIOVA/GIUSEPPE GX53

7W	4P1.702.A1K
11W	4P1.702.B1K
18W	4P1.702.E1K
28W	4P2.702.C4K
40W	4P2.702.D4K


CCT SETTABLE GX53 LED LAMPS INCLUDED

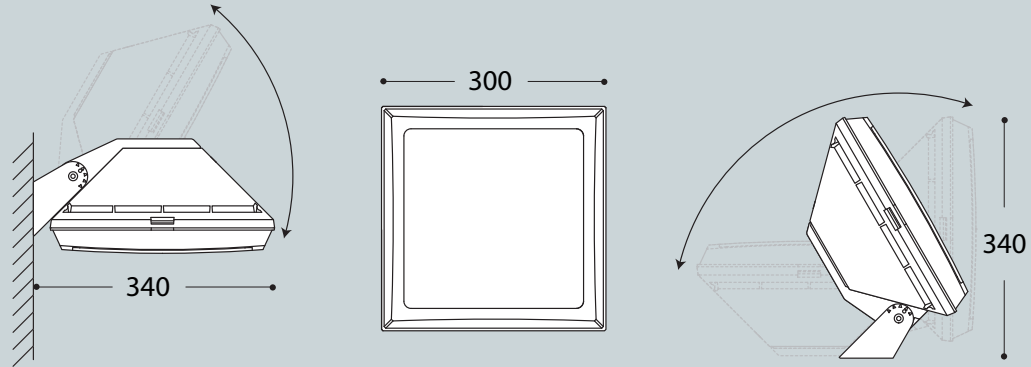

Pcs 10
Kg 31
mc 0,195

GIOVA/GIUSEPPE 2xE27

2xE27 lampholder	4P2.702.E28
2xE27 with sensor	4P2.702.ES8

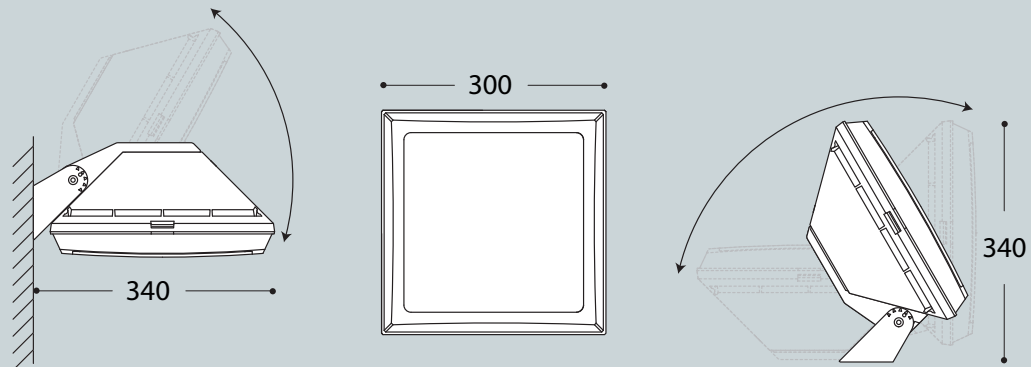

Pcs 10
Kg 21
mc 0,195

POST SYSTEM VERSION



Detailed information on page 422.

GIUSEPPE

FLOODLIGHT



Square floodlight with no visible screws made of shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for wall, ceiling and post installation. Supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included or provided with 2x E27 lampholders. Motion sensor version available. Insulation class II, Protection rating IP66.



Proiettore quadro senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto e a palo. Fornito con include lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione 2x E27, anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.




4P2.000.D4K

CCT SETTABLE

2700 K 3000 K 4000 K 6500 K

SDCM <6





GIUSEPPE - COMPONENTS

IP 66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV.

DIFFUSER made of UV-rays stabilized polymethyl-methacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

GIUSEPPE



Dimensions and weight

Height: 150 mm
Width: 300 mm
Weight: 2,8 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

LED LAMPS



Technical details on page 552.

4x GX53 LED

FULLY PRE-WIRED



4P2.702

Floodlight supplied **wit white resin reflective ceiling fully pre-wired** and complete with 4 x TÜV-CB certified long-life efficient and Kelvin settable GX53 LED lamps included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

*ADD. SUFFIX

GX53 LED	4x 7W 28W	3200 Lm	6500 K	.C4K
			4000 K	
	4x 10W 40W	4800 Lm	3000 K	.D4K
			6500 K	
			4000 K	
			3000 K	

4x 10W = 100W
4800 Lm SON-HQI

SAVE 60%

CCT SETTABLE

2700 K 3000 K 4000 K 6500 K

SDCM <6

GX53 LED

FULLY PRE-WIRED



4P1.702

Floodlight supplied **fully pre-wired** and complete with TÜV approved, long-life and efficient and Kelvin settable GX53 LED lamp in different wattages.

100 - 240 V

*ADD. SUFFIX

GX53 LED	7 W	800 Lm	6500 K	.A1K
			4000 K	
	11 W	1300 Lm	2700 K	.B1K
			6500 K	
	18 W	2000 Lm	4000 K	.E1K
			2700 K	
+ SENSOR	7 W	800 Lm	6500 K	.ASK
			4000 K	
+ SENSOR	11 W	1300 Lm	2700 K	.BSK
			6500 K	
+ SENSOR	18 W	2000 Lm	4000 K	.ESK
			2700 K	

7W 11W 18W = 60W 100W 150W
incandesce

SAVE 90%

2x E27

FULLY PRE-WIRED



4P2.702

Floodlight supplied **fully pre-wired** with white resin reflective ceiling and complete with 2x E27 lampholders.


Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

2x E27 (CFL-LED)	max 160 mm	.E28
2x E27 + SENSOR	max 160 mm	.ES8

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GIUSEPPE
FLOODLIGHT






GIUSEPPE GX53

7W	4P1.000.A1K
11W	4P1.000.B1K
18W	4P1.000.E1K
28W	4P2.000.C4K
40W	4P2.000.D4K


CCT SETTABLE GX53 LED LAMPS INCLUDED

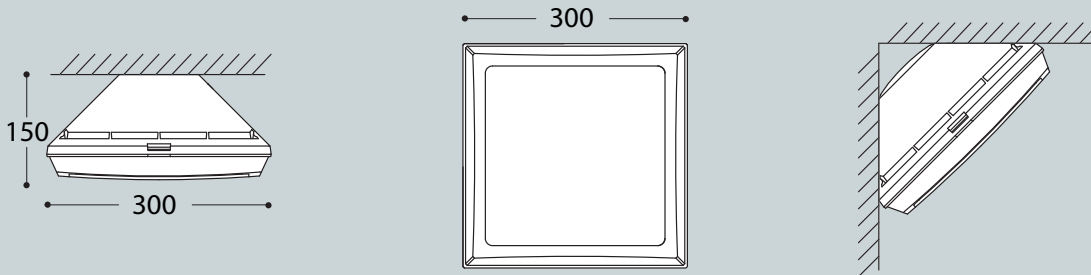

Pcs 10
Kg 29
mc 0,195

GIUSEPPE 2xE27

2xE27 lampholder	4P2.000.E28
2xE27 with sensor	4P2.000.ES8

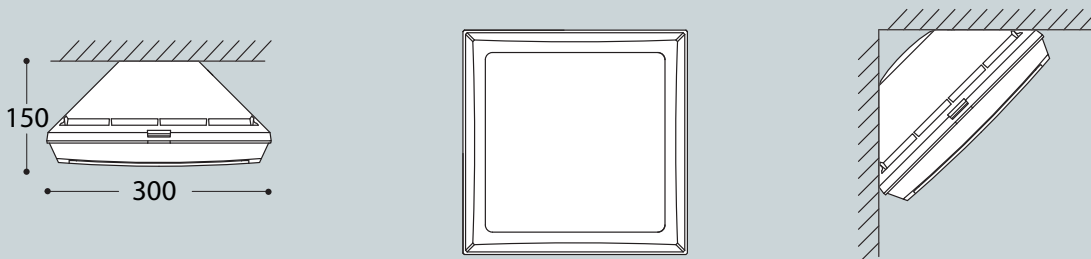

Pcs 10
Kg 19
mc 0,195

BOLLARD VERSION



Detailed information on page 194.

REFERENCES	LAMPS	POST	URBAN MODERN	URBAN CLASSIC	GARDEN	BULKHEAD	BOLLARD	FLOODLIGHT	BRICKLIGHT	IN-GROUND	DOWNLIGHT	UP&DOWN	COMPANY
------------	-------	------	--------------	---------------	--------	----------	---------	------------	------------	-----------	-----------	---------	---------



BOLLARD

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ESTER

SQUARE BOLLARD



Architectural LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Square bollards in different sizes, spike and wall mounted versions available. Supplied with stepped shape reflector and with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Insulation class II, Protection rating IP55.

Collezione di lampade architettoniche a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per installazioni su stelo bollard quadro in diverse altezze, con picchetto o a parete. Provvista di riflettore a scaletta piramidale e fornita con incluse lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.




DS1.564.D1K

CCT SETTABLE

SDCM < 6

3000 K 4000 K 6500 K





ESTER COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione

DIFFUSER in clear colour made of UV-rays stabilized polymethylmethacrilate (PMMA).

DIFFUSORE trasparente realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV.

REFLECTOR with stepped shape spreading the lighting output to emphasize the shape of the product. Made of shockproof resin material

RIFLETTORE a scaletta piramidale che consente al fascio di luce di enfatizzare la sagoma del prodotto. Realizzato in resina antiurto.



INSTALLATION ELEMENTS:

- POLES for bollard versions
- BASE for wall and surface installation
- SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:

- STELI per versione bollard
- BASE per installazione a parete e al suolo
- PICCHETTO per istallazione nel terreno

ESTER



Dimensions

Height: 165/500/800 mm
Width: 126 mm
Depth: 126 mm

Moulded colours:

- Black
- White
- Grey

Diffuser PMMA:

- Clear

LED LAMPS



Technical details on page 552.

GX53 LED

100 - 240 V

*ADD. SUFFIX




	3 W	7 W	10 W	350 Lm	800 Lm	1200 Lm	6500 K	4000 K	3000 K	.G1K
GX53 LED							6500 K	4000 K	3000 K	.G1K
GX53 LED							6500 K	4000 K	3000 K	.C1K
GX53 LED							6500 K	4000 K	3000 K	.D1K

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** easy to upgrade
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.



Bollard supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



ESTER 800 clear GX53 10W.

Bollard height 0,8 mt
Area: 6x6 mt - average 15 lux

The photometric data for all the versions are available upon request or on our website.

3W = 40W
350 Lm incandescent

SAVE 93%

7W = 75W
10W 100W incandescent

SAVE 90%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ESTER

SQUARE BOLLARD



DS1.564.D1K



DS1.560.D1K




DS1.561.D1K



DS1.563.D1K





ESTER 800	
3W	DS1.564.G1K
7W	DS1.564.C1K
10W	DS1.564.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 6
Kg 16
mc 0,145

ESTER 500	
3W	DS1.563.G1K
7W	DS1.563.C1K
10W	DS1.563.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 12
Kg 24
mc 0,145

ESTER WALL	
3W	DS1.560.G1K
7W	DS1.560.C1K
10W	DS1.560.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 22
mc 0,092

ESTER SPIKE	
3W	DS1.561.G1K
7W	DS1.561.C1K
10W	DS1.561.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 23
mc 0,092

ELISA

SQUARE BOLLARD



Architectural LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Square bollards in different sizes, spike and wall mounted versions available. Supplied with white square reflector and with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Insulation class II, Protection rating IP55.

*Collezione di lampade architettoniche a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per installazioni su stelo bollard in diverse altezze, con picchetto o a parete. Provvista di riflettore quadro in colore bianco e fornita con **include lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



DS2.564.D1K

CCT SETTABLE

3000 K 4000 K 6500 K


SDCM <6

CE CB IECEE CB SCHEME UV UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK TEMPERATURE +90° -60°

PUBLIC RESIDENTIAL WALL POST SPIKE





ELISA COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER in clear colour made of UV-rays stabilized polymethylmethacrilate (PMMA).

DIFFUSORE trasparente realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV.

REFLECTOR with square shape spreading the lighting output to create a four beams luminous effect. Made of shockproof white reflective resin material.

RIFLETTORE quadro che diffonde la luce dividendola in quattro fasci. Realizzato in resina antiurto di colore bianco.




INSTALLATION ELEMENTS:

- POLES for bollard versions
- BASE for wall and surface installation
- SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:

- STELI per versione bollard
- BASE per installazione a parete e al suolo
- PICCHETTO per istallazione nel terreno

ELISA



Dimensions
Height: 165/500/800 mm
Width: 126 mm
Depth: 126 mm

Moulded colours:

- Black
- White
- Grey

Diffuser PMMA:

- Clear

LED LAMPS



Technical details on page 552.

GX53 LED

100 - 240 V

*ADD. SUFFIX




GX53 LED	3 W	350 Lm	6500 K 4000 K 3000 K	.G1K
GX53 LED	7 W	800 Lm	6500 K 4000 K 3000 K	.C1K
GX53 LED	10 W	1200 Lm	6500 K 4000 K 3000 K	.D1K

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** easy to upgrade
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.



Bollard supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

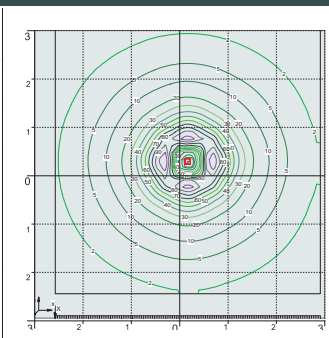

ELISA 800 clear GX53 10W.

Bollard height 0,8 mt
Area: 6x6 mt - average 13 lux

The photometric data for all the versions are available upon request or on our website.

3W 350 Lm = 40W incandescent
SAVE 93%


7W 10W = 75W 100W incandescent
SAVE 90%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ELISA

SQUARE BOLLARD





ELISA 800	
3W	DS2.564.G1K
7W	DS2.564.C1K
10W	DS2.564.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 6
Kg 16
mc 0,145

ELISA 500	
3W	DS2.563.G1K
7W	DS2.563.C1K
10W	DS2.563.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 12
Kg 24
mc 0,145

ELISA WALL	
3W	DS2.560.G1K
7W	DS2.560.C1K
10W	DS2.560.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 22
mc 0,092

ELISA SPIKE	
3W	DS2.561.G1K
7W	DS2.561.C1K
10W	DS2.561.D1K

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 18
Kg 23
mc 0,092

CARLO - CARLO DECO

ROUND BOLLARD



LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round bollards in different sizes, spike and wall mounted versions available. Provided with double PMMA diffusers and ornamental screen on deco version. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Insulation class II, protection rating IP55.

Collezione di lampade a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per installazioni su stelo bollard in diverse altezze, con picchetto o a parete. Lampada provvista di un doppio diffusore in metacrilato e di schermo ornamentale nella versione deco. Fornita con inclusa lampadina a LED GU10 con Kelvin impostabile, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.

CARLO DECO VERSION on page 170




DR1.575.L1K

CCT SETTABLE

2700 K 4000 K

SDCM <6





CARLO COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

OUTER DIFFUSER in clear colour made of UV-rays stabilized polymethylmethacrilate (PMMA) provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE ESTERNO in colore trasparente realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV. Fornito completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

ORNAMENTAL SCREEN (DECO version only) made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

SCHERMO ORNAMENTALE (solo sulla versione DECO) realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.

CONNECTION RING made of shockproof resin material, provided with GU10 lampholder.

GHIERA di raccordo realizzata in resina antiurto fornita completa di portalamпада GU10.

INSTALLATION ELEMENTS:

- POLES for bollard versions
- BRACKETS for wall mounted versions
- SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:

- STELI per versione bollard
- SUPPORTI per installazione a parete
- PICCHETTO per istallazione nel terreno

CARLO



Dimensions

Diameter: Ø100mm
Height: 250/400/800 mm

Moulded colours:

- Black
- White
- Grey

Outer Diffuser PMMA:

- Clear

Inner Diffuser PMMA:

- Opal

LED LAMPS



Technical details on page 552.

GU10 LED

100 - 240 V

*ADD. SUFFIX



GU10 LED	3,5W	350 Lm	4000 K	.U1K
			2700 K	
GU10 LED	6W	600 Lm	4000 K	.L1K
			2700 K	

Bollard supplied with TÜV-CB certified, long-life, efficient and Kelvin settable GU10 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GU10 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.


3.5W = 50W HALOGEN
350 Lm

SAVE 92%

6W = 100W HALOGEN
600 Lm

SAVE 95%


CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE





CARLO 800	
3,5W	DR1.575.U1K
6W	DR1.575.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 6 Kg 15 mc 0,147	

CARLO 400	
3,5W	DR1.574.U1K
6W	DR1.574.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 12 Kg 22,5 mc 0,147	

CARLO 250	
3,5W	DR1.573.U1K
6W	DR1.573.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 20 Kg 21 mc 0,121	

CARLO-FS	
3,5W	DR1.571.U1K
6W	DR1.571.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 20 Kg 21 mc 0,121	

CARLO WALL	
3,5W	DR1.570.U1K
6W	DR1.570.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 20 Kg 21 mc 0,121	

CARLO SPIKE	
3,5W	DR1.572.U1K
6W	DR1.572.L1K
CCT SETTABLE GU10 LED LAMP INCLUDED 2700K/4000K	
Pcs 20 Kg 21 mc 0,121	

CARLO DECO

ROUND BOLLARD



DR3.570.L1K



DR3.571.L1K



DR3.573.U1K




DR3.575.L1K



DR3.574.L1K

MADE IN ITALY



CARLO 800 DECO

3,5W	DR3.575.U1K
6W	DR3.575.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 6
Kg 15
mc 0,147

CARLO 400 DECO

3,5W	DR3.574.U1K
6W	DR3.574.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 12
Kg 22,5
mc 0,147

CARLO 250 DECO

3,5W	DR3.573.U1K
6W	DR3.573.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

CARLO-FS DECO

3,5W	DR3.571.U1K
6W	DR3.571.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

CARLO WALL DECO

3,5W	DR3.570.U1K
6W	DR3.570.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

CARLO SPIKE DECO

3,5W	DR3.572.U1K
6W	DR3.572.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K

Pcs 20
Kg 21
mc 0,121

AMELIA

ROUND BOLLARD




LED lamp range in modern style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Round bollards in different sizes, spike and wall mounted versions certified. Provided with opal PMMA diffuser to get a uniform light distribution. Supplied with TÜV-CB certified, long-life, and efficient **E27 LED filament lamps** suitable for outdoor use **included**. Insulation class II, protection rating IP55.

*Collezione di lampade a LED in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Ampia gamma di versioni disponibili per installazioni su stelo bollard in diverse altezze, con picchetto o a parete. Lampada provvista di diffusore in metacrilato opale che garantisce un'uniforme distribuzione della luce. Fornita con **incluse lampadine LED a filamento E27** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



DR2.575.N1L





AMELIA COMPONENTS

IP55



CAP fixed to the diffuser with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

CALOTTA fissata al diffusore senza viti a vista, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER in opal colour to get a uniform light distribution. Made of UV-rays stabilized polymethylmethacrylate (PMMA) and provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE in colore opale per garantire un'uniforme distribuzione della luce. Realizzato in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV, completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

CONNECTION RING made of shockproof resin material, provided with E27 lampholder.

GHIERA di raccordo realizzata in resina antiurto fornita completa di portalamпада E27.

INSTALLATION ELEMENTS:

- POLES for bollard versions
- BRACKETS for wall mounted versions
- SPIKE for in ground installation

ELEMENTI DI FISSAGGIO:

- STELI per versione bollard
- SUPPORTI per installazione a parete
- PICCHETTO per istallazione nel terreno

AMELIA



Dimensions

Diameter: Ø100mm
Height: 250/400/800 mm

Moulded colours:

- Black
- White
- Grey

Diffuser PMMA:

- Opal

E27 LED

100 - 240 V

*ADD. SUFFIX



6 W	800 Lm	4000 K	.F1L
		2700 K	.F1R
8 W	1000 Lm	4000 K	.M1L
		2700 K	.M1R
12 W	1500 Lm	4000 K	.N1L
		2700 K	.N1R

Bollard supplied as standard with TÜV-CB certified, long-life and efficient **E27 LED filament lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **SUITABLE FOR OUTDOOR USE:** 100-240 V built-in driver fully protected against heat and humidity by silicone paste.
- **OMNIDIRECTIONAL LIGHT:** 360° light output for a better lighting distribution.
- **HIGH EFFICIENCY:** 90% energy saving.

LED LAMPS




Technical details on page 552.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

AMELIA

ROUND BOLLARD





AMELIA 800		
DR2.575.F1L	6W	DR2.575.F1R
DR2.575.M1L	8W	DR2.575.M1R
DR2.575.N1L	12W	DR2.575.N1R
4000K	E27 FILAMENT LED LAMP INCLUDED	2700K
Pcs 6 Kg 15 mc 0,147		

AMELIA 400		
DR2.574.F1L	6W	DR2.574.F1R
DR2.574.M1L	8W	DR2.574.M1R
DR2.574.N1L	12W	DR2.574.N1R
4000K	E27 FILAMENT LED LAMP INCLUDED	2700K
Pcs 12 Kg 22,5 mc 0,147		

AMELIA 250		
DR2.573.F1L	6W	DR2.573.F1R
DR2.573.M1L	8W	DR2.573.M1R
DR2.573.N1L	12W	DR2.573.N1R
4000K	E27 FILAMENT LED LAMP INCLUDED	2700K
Pcs 20 Kg 21 mc 0,121		

AMELIA-FS		
DR2.571.F1L	6W	DR2.571.F1R
DR2.571.M1L	8W	DR2.571.M1R
DR2.571.N1L	12W	DR2.571.N1R
4000K	E27 FILAMENT LED LAMP INCLUDED	2700K
Pcs 20 Kg 21 mc 0,121		

AMELIA WALL		
DR2.570.F1L	6W	DR2.570.F1R
DR2.570.M1L	8W	DR2.570.M1R
DR2.570.N1L	12W	DR2.570.N1R
4000K	E27 FILAMENT LED LAMP INCLUDED	2700K
Pcs 20 Kg 21 mc 0,121		

AMELIA SPIKE		
DR2.572.F1L	6W	DR2.572.F1R
DR2.572.M1L	8W	DR2.572.M1R
DR2.572.N1L	12W	DR2.572.N1R
4000K	E27 FILAMENT LED LAMP INCLUDED	2700K
Pcs 20 Kg 21 mc 0,121		

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SAURO LED

ROUND BOLLARD - CLASSIC



Bollard range in classic style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included** available in different wattages. Uniform light distribution for a safer and more enjoyable night atmosphere. Insulation class II, protection rating IP55.

*Gamma di bollard in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con **inclusa lampadina a LED GX53 con Kelvin impostabile** certificata TÜV-CB, di lunga durata ed elevata efficienza, disponibile in diverse potenze. Uniforme distribuzione della luce per un'atmosfera notturna sicura e gradevole. Classe di isolamento II, grado di protezione IP55.*

D15.555.D1KCRB



CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL	POST

MADE IN ITALY

SAURO LED COMPONENTS

IP55



CAP made of shockproof resin material, locked to the diffuser and equipped with GX53 led lamp. To be removed for relamping by the supplied hexagonal key for locking screws.

CALOTTA fissata al diffusore, realizzata in resina antiurto e completa di lampadina led GX53. Rimovibile tramite vite di sicurezza per permettere il cambio della lampadina.

DISK made of UV-rays stabilized PMMA to spread the light and to get a lower dazzle.

DISCO in polimetilmetacrilato (PMMA) per diffondere la luce e ridurre l'abbagliamento.

DIFFUSER of UV stabilized polymethylmethacrylate (PMMA) available in clear or opal colour.

DIFFUSORE in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV, disponibile in colore trasparente o opale.

White **REFLECTOR** with conical shape made of shockproof resin material.

RIFLETTORE bianco a forma conica, realizzato in resina antiurto.

CONNECTION RING made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GHIERA di raccordo realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SAURO LED

— Ø150 —



Dimensions

Diameter: Ø150 mm
Height: 500/800/1100 mm

Moulded colours:

Black White
Grey

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

LED LAMPS



Technical details on page 552.

GX53 LED

100 - 240 V

*ADD. SUFFIX




GX53 LED	7 W	800 Lm	6500 K 4000 K 3000 K	.C1K
	10 W	1200 Lm	6500 K 4000 K 3000 K	.D1K

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.



Bollard supplied as standard with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamp included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE



SAURO 1100 clear GX53 10W.

Sauro height 1,1 mt
Area: 6x6 mt - average 11 lux

The photometric data for all the versions are available upon request or on our website.

7W 800 Lm = 75W incandescent
SAVE 90%

10W 1200 Lm = 100W incandescent
SAVE 90%

SAURO LED

ROUND BOLLARD - CLASSIC



D15.554.D1KCRB



D15.553.D1KCRB



D15.505.D1KCRB





SAURO 1100 LED	
7W	D15.555.C1KCRB
10W	D15.555.D1KCRB

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 1
Kg 4,2
mc 0,068

SAURO 800 LED	
7W	D15.554.C1KCRB
10W	D15.554.D1KCRB

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 1
Kg 3,4
mc 0,05

MIRELLA LED	
7W	D15.505.C1KCRB
10W	D15.505.D1KCRB

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 1
Kg 2,7
mc 0,032

SAURO 500 LED	
7W	D15.553.C1KCRB
10W	D15.553.D1KCRB

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 1
Kg 2
mc 0,032

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SAURO E27

ROUND BOLLARD - CLASSIC




Bollard range in classic style made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Gamma di bollard in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornito con portalampana E27 e predisposto per il fissaggio del frangilucente. Classe di isolamento II, grado di protezione IP55.

D15.554.FC1







SAURO E27 COMPONENTS



CAP locked to the diffuser and made of shockproof resin material. To be removed for relamping by the supplied hexagonal key for locking screws.

CALOTTA fissata al diffusore e realizzata in resina antiurto. Rimovibile tramite vite di sicurezza per permettere il cambio della lampadina.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), available in clear or opal colour.

DIFFUSORE in polimetilmetacrilato (PMMA) resistente all'ingiallimento ed ai raggi UV, disponibile in colore trasparente o opale.

LOUVRE (Optional) with a laminar symmetrical optic system, to direct the lighting output and to get a lower dazzle. Available in white resin material or in chrome aluminium. Recommended use with clear diffuser bollard.

FRANGILUCE (Optional) con sistema ottico lamellare a ripartizione simmetrica, per orientare il fascio di luce e ridurre l'abbagliamento, disponibile nella versione in resina bianca o in alluminio cromato (utilizzo raccomandato con diffusore trasparente).

CLOSED RING
White Resin
(H.FRA.D15)



CLOSED RING
Aluminium Chrome
(H.FC1)



CONNECTION RING provided with E27 lampholder seat in its upper side.

GHIERA di raccordo nella cui parte superiore si trova l'alloggiamento del portalamada E27.

SAURO E27



Dimensions

Diameter: Ø150 mm
Height: 500/800/1100 mm

Moulded colours:

- Black
- White
- Grey (except Nardo)

Painted colours:

- Antique green
- Antique bronze

Diffuser PMMA:

- Clear
- Opal

E27 VERSIONS

100 - 240 V

*ADD. SUFFIXV


lampholder only E27	max 70W max 190mm		.E27	
		6 W	800 Lm	4000 K
2700 K				.F1R
8 W		1000 Lm	4000 K	.M1L
			2700 K	.M1R
12 W		1500 Lm	4000 K	.N1L
			2700 K	.N1R

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE

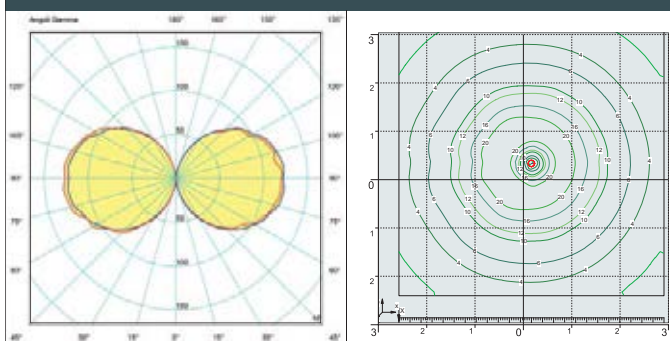

SAURO1100 opal 12W Filament LED.

Sauro height 1,1mt
Area: 6x6 mt - average 8 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

SAURO E27

ROUND BOLLARD - CLASSIC



D15.555.FC1



D15.505.FRA



D15.554.FC1



SAURO 1100
D15.555

Pcs 1
Kg 4
mc 0,068

150
1100
Ø245

SAURO 800
D15.554

Pcs 1
Kg 3,2
mc 0,05

150
800
Ø245

MIRELLA
D15.505

Pcs 1
Kg 2,5
mc 0,037

150
520
240

SAURO 500
D15.553

Pcs 1
Kg 1,8
mc 0,032

150
500
Ø245

NARDO 900
000.515

Pcs 1
Kg 1,6
mc 0,054

150
900
Ø245
CHAIN NOT INCLUDED

NARDO 600
000.514

Pcs 1
Kg 1,2
mc 0,040

150
600
Ø245
CHAIN NOT INCLUDED

BOLLARD CHAIN (OPTIONAL)
H.BOL.CHN

Optional resin chain for Bollard - Size 1000 mm. Supplied with 2 open rings with closing system at the end.

Catena opzionale per bollard in resina - Misura 1000 mm fornita con due anelli aperti con sistema di chiusura alle estremità.

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GABRI - MINIGABRI/ RANGE

BULKHEAD BOLLARD



Bollard range in modern style, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Poles available in two different sizes. Modular system for single or double luminaries installation. To be combined with LUCIA and MADDI bulkhead range (pag. 238 - 242). Insulation class II, protection rating IP66.

Gamma di bollard in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Palo disponibile in due diverse misure. Sistema modulare per permettere l'installazione singola o doppia dei corpi illuminanti. Da combinarsi con la gamma di plafoniere LUCIA e MADDI (pag. 238 - 242). Classe di isolamento II, grado di protezione IP66.

1R3.613.X10




CCT SETTABLE

SDCM <6

2700 K 4000 K 6500 K





POLES

POST made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Moulded colours in paste, no maintenance or painting required. Post and base are made of one piece only without joints to withstand the most strong stress. Provided with screws for ground fixation.

PALO realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Colore stampato in pasta, non necessita di verniciatura. Palo e basamento sono fabbricati in un unico pezzo senza giunzioni per resistere alle più forti sollecitazioni. Provvisto di viti per il fissaggio a terra.

GABRI POST



Dimensions
Height: 800 mm
Width: 240 mm
Depth: 240 mm

MINIGABRI POST



Dimensions
Height: 500 mm
Width: 240 mm
Depth: 240 mm

LUMINARIES INSTALLATION

IP66

MODULAR SYSTEM for single or double luminaries installation. LUCIA and MADDI bulkheads can be fixed straight on the post or angled at 35° by adding the REMI bracket.

SISTEMA MODULARE per permettere l'installazione singola o doppia dei corpi illuminanti. Le plafoniere LUCIA e MADDI possono essere fissate direttamente a palo o angolate a 35° aggiungendo il braccio REMI.

Dimensions
Height: 500 mm
Width: 240 mm
Depth: 240 mm

Moulded colours:

- Black
- White
- Grey

Diffuser PMMA:

- Opal

SUITABLE BULKHEADS FOR POST INSTALLATION

BULKHEAD				See page 238 for full details about LUCIA bulkhead. <i>Informazioni complete sulla plafoniera LUCIA a pag. 238</i>
	LUCIA 1R3.000	LUCIA-EL 2R3.000	LUCIA-GD 3R3.000	
	BULKHEAD			
MADDI 1V3.000		MADDI-VE 2V3.000	MADDI-HL 3V3.000	

LED LAMPS

Technical details on page 552.

AVAILABLE LAMPS				*ADD. SUFFIX
GX53 LED				
7 W	800 Lm	6500 K	.A1K	
		4000 K		
		2700 K		
11 W	1300 Lm	6500 K	.B1K	
		4000 K		
		2700 K		
18 W	2000 Lm	6500 K	.E1K	
		4000 K		
		2700 K		
E27				*ADD. SUFFIX
E27 (CFL -LED)	max 160 mm			.E27

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GABRI/LUCIA RANGE

BULKHEAD BOLLARD



1R3.613.X10




2R3.613.X20



3R3.613.020

MADE IN ITALY



GABRI/LUCIA 1L
1R3.613.010

Pcs 1
Kg 4
mc 0,097

Ø 240

GABRI/LUCIA 2L
1R3.613.020

Pcs 1
Kg 5
mc 0,097

Ø 240

GABRI REMI/LUCIA 1L
1R3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/LUCIA 2L
1R3.613.X20

Pcs 1
Kg 6
mc 0,097

Ø 240

GABRI/LUCIA-EL 1L
2R3.613.010

Pcs 1
Kg 4
mc 0,097

Ø 240

GABRI/LUCIA-EL 2L
2R3.613.020

Pcs 1
Kg 5
mc 0,097

Ø 240

GABRI REMI/LUCIA-EL 1L
2R3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/LUCIA-EL 2L
2R3.613.X20

Pcs 1
Kg 6
mc 0,097

Ø 240

GABRI/LUCIA-GD 1L
3R3.613.010

Pcs 1
Kg 4
mc 0,097

Ø 240

GABRI/LUCIA-GD 2L
3R3.613.020

Pcs 1
Kg 5
mc 0,097

Ø 240

GABRI REMI/LUCIA-GD 1L
3R3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/LUCIA-GD 2L
3R3.613.X20


Pcs 1
Kg 6
mc 0,097

Ø 240

MINIGABRI/LUCIA RANGE

BULKHEAD BOLLARD





MINIGABRI/LUCIA 1L
1R3.612.010

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI/LUCIA 2L
1R3.612.020

Pcs 1
Kg 4,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA 1L
1R3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA 2L
1R3.612.X20

Pcs 1
Kg 5
mc 0,065

Ø 240

MINIGABRI/LUCIA-EL 1L
2R3.612.010

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI/LUCIA-EL 2L
2R3.612.020

Pcs 1
Kg 4,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA-EL 1L
2R3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA-EL 2L
2R3.612.X20

Pcs 1
Kg 5
mc 0,065

Ø 240

MINIGABRI/LUCIA-GD 1L
3R3.612.010

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI/LUCIA-GD 2L
3R3.612.020

Pcs 1
Kg 4,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA-GD 1L
3R3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/LUCIA-GD 2L
3R3.612.X20

Pcs 1
Kg 5
mc 0,065

Ø 240

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GABRI/MADDI RANGE

BULKHEAD BOLLARD



1V3.613.X20




2V3.613.X10



2V3.613.020





GABRI/MADDI 1L
1V3.613.010

Pcs 1
Kg 4
mc 0,097

Ø 240

GABRI/MADDI 2L
1V3.613.020

Pcs 1
Kg 5
mc 0,097

Ø 240

GABRI REMI/MADDI 1L
1V3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/MADDI 2L
1V3.613.X20

Pcs 1
Kg 6
mc 0,097

Ø 240

GABRI/MADDI-VE 1L
2V3.613.010

Pcs 1
Kg 4
mc 0,097

Ø 240

GABRI/MADDI-VE 2L
2V3.613.020

Pcs 1
Kg 5
mc 0,097

Ø 240

GABRI REMI/MADDI-VE 1L
2V3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/MADDI-VE 2L
2V3.613.X20

Pcs 1
Kg 6
mc 0,097

Ø 240

GABRI REMI/MADDI-HL 1L
3V3.613.X10

Pcs 1
Kg 4,5
mc 0,097

Ø 240

GABRI REMI/MADDI-HL 2L
3V3.613.X20


Pcs 1
Kg 6
mc 0,097

Ø 240

MINIGABRI/MADDI RANGE

BULKHEAD BOLLARD





MINIGABRI/MADDI 1L
1V3.612.010

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI/MADDI 2L
1V3.612.020

Pcs 1
Kg 4,5
mc 0,065

Ø 240

MINIGABRI REMI/MADDI 1L
1V3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/MADDI 2L
1V3.612.X20

Pcs 1
Kg 5
mc 0,065

Ø 240

MINIGABRI/MADDIVE 1L
2V3.612.010

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI/MADDIVE 2L
2V3.612.020

Pcs 1
Kg 4,5
mc 0,065

Ø 240

MINIGABRI REMI/MADDIVE 1L
2V3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/MADDIVE 2L
2V3.612.X20

Pcs 1
Kg 5
mc 0,065

Ø 240

MINIGABRI REMI/MADDIHL 1L
3V3.612.X10

Pcs 1
Kg 3,5
mc 0,065

Ø 240

MINIGABRI REMI/MADDIHL 2L
3V3.612.X20

Pcs 1
Kg 5
mc 0,065

Ø 240

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

PINA - PINELA/ RANGE

BULKHEAD BOLLARD



Bollard range in modern style, made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Poles available in two different sizes. Modular system for single or double luminaries installation. To be combined with GERMANA and GIUSEPPE floodlight range (pag. 144 - 152). Insulation class II, protection rating IP66.

Gamma di bollard in stile moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Palo disponibile in due diverse misure. Sistema modulare per permettere l'installazione singola o doppia dei corpi illuminanti. Da combinarsi con la gamma di apparecchi GERMANA e GIUSEPPE (pag. 144 - 152). Classe di isolamento II, grado di protezione IP66.



2N1.613.C2K

CCT SETTABLE

2700 K 3000 K 4000 K 6500 K

SDCM < 6

	UV TREATED	DOUBLE INSULATION		PUBLIC	RESIDENTIAL
RECYCLABLE	ANTI-SHOCK	TEMPERATURE		POST	





POLES



POST made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Moulded colours in paste, no maintenance or painting required. Post and base are made of one piece only without joints to withstand the most strong stress. Provided with screws for ground fixation.

PALO realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Colore stampato in pasta, non necessita di verniciatura. Palo e basamento sono fabbricati in un unico pezzo senza giunzioni per resistere alle più forti sollecitazioni. Provvisto di viti per il fissaggio a terra.

PINA - PINELA POST



Dimensions
Height: 800 mm
Width: 240 mm
Depth: 240 mm

MINIPINELA POST



Dimensions
Height: 500 mm
Width: 240 mm
Depth: 240 mm

Moulded colours:

Black White

Grey

Diffuser PMMA:

Opal

LUMINARIES INSTALLATION



IP66

MODULAR SYSTEM for single or double luminaries installation.

SISTEMA MODULARE per permettere l'installazione singola o doppia dei corpi illuminanti.

SUITABLE LUMINARIES FOR POST INSTALLATION



GERMANA
2N1.000

See page 144 for full details about **GERMANA** floodlight.

Informazioni complete sull'apparecchio **GERMANA** a pag. 144



GIUSEPPE
4P1.000
4P2.000

See page 152 for full details about **GIUSEPPE** floodlight.

Informazioni complete sull'apparecchio **GIUSEPPE** a pag. 152

AVAILABLE LAMPS

GX53 LED			*ADD. SUFFIX
2x 3W 6W	700 Lm	6500 K	.G2K
		4000 K	
		3000 K	
2x 7W 14W	1600 Lm	6500 K	.C2K
		4000 K	
		3000 K	
2x 10W 14W	2400 Lm	6500 K	.D2K
		4000 K	
		3000 K	
E27			
E27 (CFL-LED)	max 160 mm		.P27

LED LAMPS



Technical details on page 552.

AVAILABLE LAMPS

GX53 LED			*ADD. SUFFIX
7 W	800 Lm	6500 K	.A1K
		4000 K	
		2700 K	
11 W	1300 Lm	6500 K	.B1K
		4000 K	
		2700 K	
18 W	2000 Lm	6500 K	.E1K
		4000 K	
		2700 K	

AVAILABLE LAMPS

4X GX53 LED			*ADD. SUFFIX
4x 7W 28W	3200 Lm	6500 K	.C4K
		4000 K	
		3000 K	
4x 10W 40W	4800 Lm	6500 K	.D4K
		4000 K	
		3000 K	
2x E27			
2xE27 (CFL-LED)	max 160 mm		.P27

PINA - PINELA RANGE

BULKHEAD BOLLARD



2N1.613.010.D2K




2N1.613.020.D2K





4P1.613.010.D4K




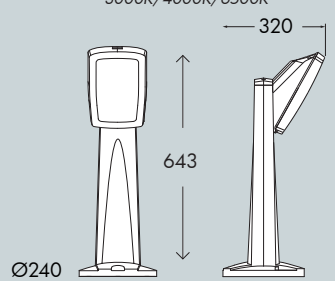



MINIPINELA 1L	
6W	2N1.612.010.G2K
14W	2N1.612.010.C2K
20W	2N1.612.010.D2K
2 CCT SETTABLE GX53 LED LAMPS INCLUDED 3000K/4000K/6500K	
	
Pcs 1 Kg 3,5 mc 0,06	
E27 lampholder	2N1.612.010.P27
E27 with sensor	2N1.612.010.PS7

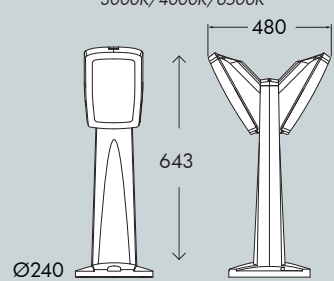MINIPINELA 2L	
2x6W	2N1.612.020.G2K
2x14W	2N1.612.020.C2K
2x20W	2N1.612.020.D2K
2 CCT SETTABLE GX53 LED LAMPS INCLUDED 3000K/4000K/6500K	
	
Pcs 1 Kg 4 mc 0,06	
E27 lampholder	2N1.612.020.P27
E27 with sensor	2N1.612.020.PS7

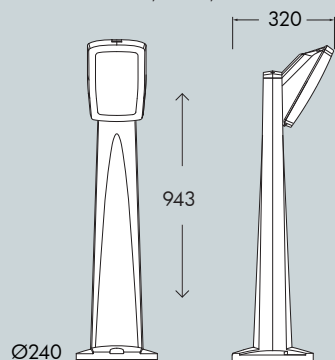PINELA 1L	
6W	2N1.613.010.G2K
14W	2N1.613.010.C2K
20W	2N1.613.010.D2K
2 CCT SETTABLE GX53 LED LAMPS INCLUDED 3000K/4000K/6500K	
	
Pcs 1 Kg 4 mc 0,097	
E27 lampholder	2N1.613.010.P27
E27 with sensor	2N1.613.010.PS7

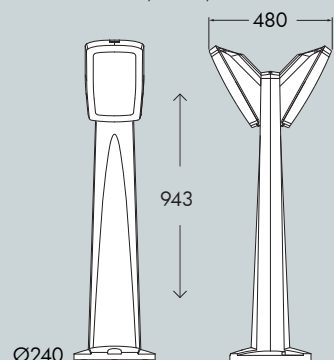PINELA 2L	
2x6W	2N1.613.020.G2K
2x14W	2N1.613.020.C2K
2x20W	2N1.613.020.D2K
2 CCT SETTABLE GX53 LED LAMPS INCLUDED 3000K/4000K/6500K	
	
Pcs 1 Kg 5 mc 0,097	
E27 lampholder	2N1.613.020.P27
E27 with sensor	2N1.613.020.PS7

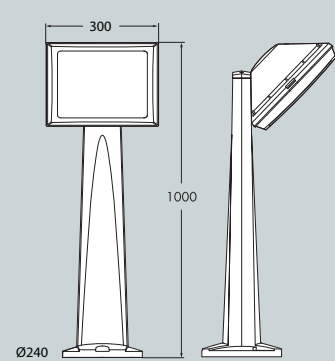PINA 1L	
7W	4P1.613.010.A1K
11W	4P1.613.010.B1K
18W	4P1.613.010.E1K
28W	4P2.613.010.C4K
40W	4P2.613.010.D4K
CCT SETTABLE GX53 LED LAMP INCLUDED	
	
Pcs 1 Kg 4,5 mc 0,097	
2xE27 lampholder	4P2.613.010.E28
2xE27 with sensor	4P2.613.010.ES8

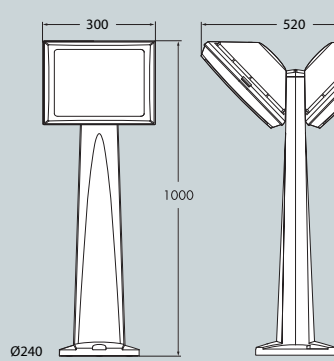PINA 2L	
2x 7W	4P1.613.020.A1R
2x 11W	4P1.613.020.B1R
2x 18W	4P1.613.020.E1R
2x 28W	4P2.613.020.C4R
2x 40W	4P2.613.020.D4R
CCT SETTABLE GX53 LED LAMP INCLUDED	
	
Pcs 1 Kg 7 mc 0,097	
2xE27 lampholder	4P2.613.020.E28
2xE27 with sensor	4P2.613.020.ES8



BULKHEAD

FRANCY-OP

RECTANGULAR



Bulkhead lamp with no visible screws and front light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with **E27** lampholder. Version with motion sensor available. Insulation class II, Protection rating IP66.




Plafoniera senza viti a vista con emissione della luce frontale. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Completa di lampadine a LED GX53 co Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza o fornita nella versione E27. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.



2A1.000





FRANCY-OP - COMPONENTS

IP 66



COVER with no visible screws made of shockproof resin material UV-rays stabilized. Designed for getting front light emission.

COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV. Disegnata per ottenere un'emissione frontale della luce.



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.



BASE made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided with E27 or with 2x GX53 lampholders and complete with silicone rubber gasket to ensure high protection against external agents.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di portalampada E27 o di 2 portalampada GX53. Completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

FRANCY-OP



Dimensions and weight

Width: 130 mm
Height: 300 mm
Depth: 90 mm
Weight: 0,6 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

LED LAMPS



Technical details on page 552.

GX53 LED



Bulkhead supplied **fully pre-wired** complete with 2 x TÜV-CB certified long-life, efficient and Kelvin settable **GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V

*ADD. SUFFIX

	2x 3W 6 W	700 Lm	6500 K 4000 K 3000 K	.G2K
--	---------------------	---------------	----------------------------	------

2x 3W
700 Lm = **60W** incandescent

SAVE 90%

CCT SETTABLE LED LAMP



E27



Bulkhead supplied **fully pre-wired** with E27 lampholder. Provided as an option with 2 x TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use with driver fully protected against heat and humidity by silicone paste.

max 160 mm

*ADD. SUFFIX

E27 (CFL-LED)	max 160 mm	.E27
6 W	800 Lm	4000 K .F1L 2700 K .F1R
8 W	1000 Lm	4000 K .M1L 2700 K .M1R
12 W	1500 Lm	4000 K .N1L 2700 K .N1R

6W
8W
12W = **60W**
75W
100W incandescent

SAVE 90%

E27 with sensor



Bulkhead supplied **fully pre-wired** with E27 lampholder and **LED filament lamps** as an option. Complete with microwave daylight and motion **sensor**. Sensor operating voltage: 220-240V. (120V version available on demand).

max 160 mm

*ADD. SUFFIX

E27 (CFL-LED)	max 160 mm	.E27
6 W	800 Lm	4000 K .S1L 2700 K .S1R
8 W	1000 Lm	4000 K .T1L 2700 K .T1R
12 W	1500 Lm	4000 K .V1L 2700 K .V1R

6W
8W
12W = **60W**
75W
100W incandescent


SAVE 90%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

FRANCY-OP

RECTANGULAR





FRANCY-OP GX53	
2x3W	2A1.000.G2K
2 CCT SETTABLE GX53 LED LAMPS INCLUDED 3000K/4000K/6500K	
Pcs 24	
Kg 17,2	
mc 0,12	

FRANCY-OP E27		
2A1.000.F1L	6W	2A1.000.F1R
2A1.000.M1L	8W	2A1.000.M1R
2A1.000.N1L	12W	2A1.000.N1R
4000K		2700K
Pcs 24		
Kg 15,7		
mc 0,12		
E27 lampholder		2A1.000.E27
E27 with sensor		2A1.000.ES7

BERTINA

SMALL ROUND



LED bulkhead lamp with round shape and **no visible screws**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Insulation class II, Protection rating IP66.



*Plafoniera circolare a LED senza viti a vista. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Fornita con **include lampadine a LED GX53 con Kelvin impostabile** certificate TÜV-CB, di lunga durata ed elevata efficienza, disponibili in diverse potenze. Classe di isolamento II, grado di protezione IP66.*




1B1.000.D1K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





BERTINA - COMPONENTS

IP 66



COVER with no visible screws made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista realizzata in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.

BASE made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided with GX53 lampholder and with silicone rubber gasket to ensure high protection against external agents.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di portalampe GX53 e di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BERTINA



Dimensions and weight

Diameter: \varnothing 200 mm
Depth: 70 mm
Weight: 0,6 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS



Technical details on page 552.

GX53 LED

100 - 240 V

*ADD. SUFFIX



				6500 K	
	3 W	350 Lm		4000 K	.G1K
				3000 K	
				6500 K	
	7 W	800 Lm		4000 K	.C1K
				3000 K	
				6500 K	
	10 W	1200 Lm		4000 K	.D1K
				3000 K	
				6500 K	


Bulkhead supplied **fully pre-wired** complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.

3W 350 Lm = 40W incandescent
SAVE 93%

7W 10W = 75W 100W incandescent
SAVE 90%

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

BERTINA

SMALL ROUND




1B1.000.D1K



1B1.000.D1K





BERTINA	
3W	1B1.000.G1K
7W	1B1.000.C1K
10W	1B1.000.D1K
CCT SETTABLE GX53 LED LAMP INCLUDED 3000K/4000K/6500K	
Pcs 45 Kg 30 mc 0,194	

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BERTA

MEDIUM ROUND



Round bulkhead lamp with **no visible screws**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.



*Plafoniera circolare **senza viti a vista**, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione **GX53 LED con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*



1B2.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



BERTA - COMPONENTS

IP 66



COVER with no visible screws made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista realizzata in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder. Complete with silicone rubber gasket to ensure high protection against external agents.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalamпада GX53 o di piatto riflettente in resina bianca e portalamпада E27. Completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BERTA



Dimensions and weight

Diameter: ∅ 275 mm
Depth: 80 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

		100 - 240 V			*ADD. SUFFIX
	7 W	800 Lm	6500 K	.A1K	
			4000 K		
			2700 K		
	11 W	1300 Lm	6500 K	.B1K	
			4000 K		
			2700 K		
18 W	2000 Lm	6500 K	.E1K		
		4000 K			
		2700 K			

7W 11W 18W = 60W 100W 150W incandescent

SAVE 90%

E27



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


E27 (CFL -LED)	max 160 mm ↔	.P27
E27 + SENSOR (CFL -LED)		.PS7

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP




CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

BERTA

MEDIUM ROUND





BERTA GX53	
7W	1B2.000.A1K
11W	1B2.000.B1K
18W	1B2.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 20
mc 0,194

BERTA E27	
E27 lampholder	1B2.000.P27
E27 with sensor	1B2.000.PS7

Pcs 16
Kg 16,8
mc 0,194

UMBERTA

LARGE ROUND



Round bulkhead lamp with **no visible screws**. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **2xE27** version available. Provided as option with motion sensor or emergency kit. Insulation class II, Protection rating IP66.



*Plafoniera circolare **senza viti a vista**, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a **LED GX53 con Kelvin impostabile** o **2xE27**. Fornita anche con sensore o kit d'emergenza. Classe di isolamento II, grado di protezione IP66.*



1B3.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



UMBERTA - COMPONENTS

IP66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free.

COVER in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione.


Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.

BASE complete with highly heat resistant **REFLECTIVE PLATE**, suitable for the electrical devices fixation. Provided with GX53 or E27 lampholder and with silicone rubber gasket to ensure high protection against external agents.

BASE completa di **PIATTO RIFLETTENTE** ad alta resistenza al calore, adatto ad alloggiare gli accessori elettrici. Fornita completa di portalamпада GX53 o E27 e guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

UMBERTA



Dimensions and weight

Diameter: Ø 350 mm
Depth: 94 mm
Weight: 1,3 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:


Opal

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

EMERGENCY VERSION



Detailed information on page 217

1B3.000.EM1

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available. Quick and easy lamp replacement for a very simple maintenance after installation. Daylight and motion sensor available as option.

		100 - 240 V			*ADD. SUFFIX
	7 W	800 Lm	6500 K	.A1K	
			4000 K		
			2700 K		
	11 W	1300 Lm	6500 K	.B1K	
			4000 K		
			2700 K		
	18 W	2000 Lm	6500 K	.E1K	
			4000 K		
			2700 K		
	7 W + SENSOR	800 Lm	6500 K	.ASK	
			4000 K		
			2700 K		
	11 W + SENSOR	1300 Lm	6500 K	.BSK	
			4000 K		
			2700 K		
	18 W + SENSOR	2000 Lm	6500 K	.ESK	
			4000 K		
			2700 K		

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with single or double **E27 lampholder**. Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

		*ADD. SUFFIX
E27 (CFL -LED)		.E27
2x E27 (CFL -LED)		.E28
E27 + SENSOR (CFL -LED)		.ES7
2x E27 + SENSOR (CFL -LED)		.ES8


7W 11W 18W = 60W 100W 150W incandescent

SAVE 90%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

UMBERTA
LARGE ROUND





UMBERTA GX53	
7W	1B3.000.A1K
11W	1B3.000.B1K
18W	1B3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 12
Kg 22
mc 0,198

UMBERTA E27	
1xE27 lampholder	1B3.000.E27
2xE27 lampholder	1B3.000.E28
1xE27 with sensor	1B3.000.ES7
2xE27 with sensor	1B3.000.ES8

Pcs 12
Kg 19,6
mc 0,198

UMBERTA EMERGENCY

LARGE ROUND



LED MAINTAINED EMERGENCY bulkhead lamp with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. In case of blackout, the bulkhead switches from Normal mode to Emergency mode and keeps on working. Minimum 3 hours battery operating time. Insulation class II, Protection rating IP66.



Plafoniera a LED, RETE PIU' EMERGENZA, senza viti a vista. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. In caso di interruzione di corrente, la plafoniera passa dalla modalità "Normale" alla modalità "Emergenza" e rimane accesa. Autonomia minima 3 ore. Classe di isolamento II, grado di protezione IP66.



1B3.000.EM1



UMBERTA EMERGENCY - COMPONENTS

IP66



LED Printed Circuit Board provided with a fully-prewired **Emergency Kit**. In case of blackout the bulkhead automatically switches from Normal mode (15W - 2000 Lm) to Emergency mode (2,4W - 250 Lm) and keeps on working for the next 3 hours.

Circuito stampato a LED fornito completo di kit d'emergenza pre-cablato. In caso di interruzione di corrente, la plafoniera passa dalla modalità "Normale" (15W - 2000 Lm) alla modalità "Emergenza" (2,4W - 250lm) e rimane accesa per 3 ore.



UMBERTA



Dimensions and weight

Diameter: \varnothing 350 mm
Depth: 94 mm
Weight: 2,3 Kg

Moulded Colours:



Black Grey White

Diffuser PMMA:

Opal


UMBERTA MAINTAINED EMERGENCY

1B3.000.EM1

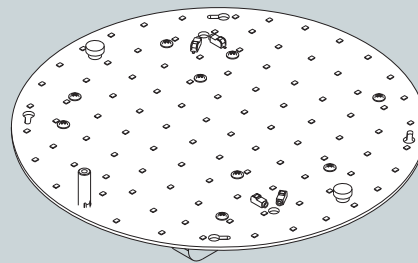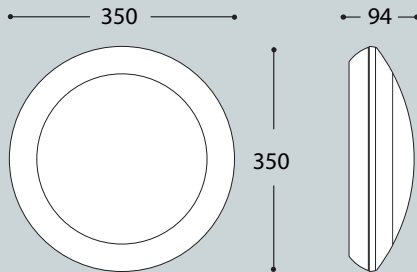

Pcs 12
Kg 25
mc 0,198


PRODUCT TYPE	Wall and Ceiling bulkhead with Emergency kit
OPERATING VOLTAGE	220~240 vAC
LUMINOUS FLUX & POWER	2000 lumen (Normal mode), 15W 250 lumen (Emergency mode), 2.4W
LED TYPE	Edison SMD 2835, 4000 K
CRI	>80Ra
PF (POWER FACTOR)	>0.95
BEAM ANGLE	120°
OPERATING TEMPERATURE	0~50°C
BATTERY	Ni-MH, BK370Ah3.6V, Panasonic (3.5Ah, 3.6V)
BATTERY OPERATING TIME	min 3 hours (250 lumen)
BATTERY CHARGING TIME	24 hours
Drivers Standards	EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62384, EN 60598-2-22 EN 55015, EN61547, EN 61000-3-2, EN 61000-3-3
Battery Standards	EN 5501-1, EN 61000, EN 55014-2



Emergency details



SAVE 90%



GREEN LED
Identifies the emergency light and shows that the system is operating correctly.



TEST BUTTON
Bulkhead provided with built-in test button to check battery status.



MAINTAINED EMERGENCY
Normal mode: 15W - 2000Lm
Emergency mode: 2.4W - 250 Lm

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GELMI RANGE

ROUND



Round bulkhead lamp with ring, eyelid or grid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

*Plafoniera circolare con cover ad anello, a palpebra o a griglia. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a **LED GX53 con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*



2G3.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



GELMI - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.

COVER in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalampada GX53 o di piatto riflettente in resina bianca e portalampada E27.

GELMI



Dimensions and weight

Diameter: Ø 313 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

		100 - 240 V			*ADD. SUFFIX
	7 W	800 Lm	6500 K	.A1K	
			4000 K		
			2700 K		
	11 W	1300 Lm	6500 K	.B1K	
			4000 K		
			2700 K		
18 W	2000 Lm	6500 K	.E1K		
		4000 K			
		2700 K			

7W
 11W
 18W
 =
 60W
 100W
 150W
SAVE 90%

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


E27 (CFL -LED)	max 160 mm	*ADD. SUFFIX .E27
E27 + SENSOR (CFL -LED)		*ADD. SUFFIX .ES7

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GELMI RANGE

ROUND



1G3.000



2G3.000



3G3.000





GELMI GX53	
7W	1G3.000.A1K
11W	1G3.000.B1K
18W	1G3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 20
mc 0,194

GELMI E27	
E27 lampholder	1G3.000.E27
E27 with sensor	1G3.000.ES7

Pcs 16
Kg 16,8
mc 0,194

GELMI-EL GX53	
7W	2G3.000.A1K
11W	2G3.000.B1K
18W	2G3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 20
mc 0,194

GELMI-EL E27	
E27 lampholder	2G3.000.E27
E27 with sensor	2G3.000.ES7

Pcs 16
Kg 16,8
mc 0,194

GELMI-GR GX53	
7W	3G3.000.A1K
11W	3G3.000.B1K
18W	3G3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 20
mc 0,194

GELMI-GR E27	
E27 lampholder	3G3.000.E27
E27 with sensor	3G3.000.ES7

Pcs 16
Kg 16,8
mc 0,194


COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

DANZI RANGE

OVAL



Oval bulkhead lamp with ring, eyelid or grid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

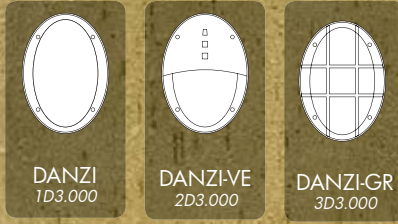

Plafoniera ovale con cover ad anello, a palpebra o a griglia. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a LED GX53 con Kelvin impostabile o E27. Classe di isolamento II, grado di protezione IP66.



1D3.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6

MADE IN ITALY

DANZI - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.

COVER in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalampada GX53 o di piatto riflettente in resina bianca e portalampada E27.

DANZI



Dimensions and weight

Width: 245 mm
Height: 338 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜ-CB certified long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

		100 - 240 V		*ADD. SUFFIX
	7 W	800 Lm	6500 K	.A1K
			4000 K	
			2700 K	
	11 W	1300 Lm	6500 K	.B1K
			4000 K	
			2700 K	
18 W	2000 Lm	6500 K	.E1K	
		4000 K		
		2700 K		

7W
 11W
 18W
 =
 60W
 100W
 150W
 incandescent
SAVE 90%

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


E27 (CFL -LED)	max 160 mm	*ADD. SUFFIX .E27
E27 + SENSOR (CFL -LED)		.E57

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

DANZI RANGE

OVAL



DANZI GX53

7W	1D3.000.A1K
11W	1D3.000.B1K
18W	1D3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 18,7
mc 0,194

DANZI E27

E27 lampholder	1D3.000.E27
E27 with sensor	1D3.000.ES7

Pcs 16
Kg 15,5
mc 0,194

DANZI-VE GX53

7W	2D3.000.A1K
11W	2D3.000.B1K
18W	2D3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 18,7
mc 0,194

DANZI-VE E27

E27 lampholder	2D3.000.E27
E27 with sensor	2D3.000.ES7

Pcs 16
Kg 15,5
mc 0,194

DANZI-GR GX53

7W	3D3.000.A1K
11W	3D3.000.B1K
18W	3D3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 18,7
mc 0,194

DANZI-GR E27

E27 lampholder	3D3.000.E27
E27 with sensor	3D3.000.ES7

Pcs 16
Kg 15,5
mc 0,194

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

STUCCHI

SQUARE



Square bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Supplied as option with colored backlit base. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.



STUCCHI
1U3.000

*Plafoniera quadra realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*



1U3.000.BU1

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



STUCCHI - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized.

COVER in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.


DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlit colours to create a coloured effect on wall and ceilings.

BASE realizzata in resina antiurto. Fornita completa di portalampana E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.



STUCCHI



Dimensions and weight

Height: 310 mm
Width: 310 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:



Diffuser PMMA:



GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

		100 - 240 V		*ADD. SUFFIX
	7 W	800 Lm	6500 K	.A1K
			4000 K	
			2700 K	
	11 W	1300 Lm	6500 K	.B1K
			4000 K	
			2700 K	
18 W	2000 Lm	6500 K	.E1K	
		4000 K		
		2700 K		

7W
 11W
 18W
 =
 60W
 100W
 150W
SAVE 90%

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


E27 (CFL -LED)	max 160 mm	*ADD. SUFFIX .E27
E27 + SENSOR (CFL -LED)		.ES7

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

STUCCHI

SQUARE



1U3.000.PK1



1U3.000



STUCCHI GX53	
7W	1U3.000.A1K
11W	1U3.000.B1K
18W	1U3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 16
Kg 20
mc 0,194

STUCCHI E27	
E27 lampholder	1U3.000.E27
E27 with sensor	1U3.000.ES7

Pcs 16
Kg 16.8
mc 0,194

CECCHI

RECTANGULAR



Rectangular bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Supplied as option with coloured backlit base. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.



*Plafoniera rettangolare realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*

1H3.000.C11



CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



CECCHI COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized.

COVER in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlit colours to create a coloured effect on wall and ceilings.

BASE realizzata in resina antiurto. Fornita completa di portalampana E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.



CECCHI



Dimensions and weight

Width: 338 mm
Height: 245 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

		100 - 240 V		*ADD. SUFFIX
	7 W	800 Lm	6500 K	.A1K
			4000 K	
			2700 K	
	11 W	1300 Lm	6500 K	.B1K
			4000 K	
			2700 K	
18 W	2000 Lm	6500 K	.E1K	
		4000 K		
		2700 K		

7W
11W
18W

=

60W
100W
150W

incandescent

SAVE 90%

E27



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP





CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

CECCHI
RECTANGULAR

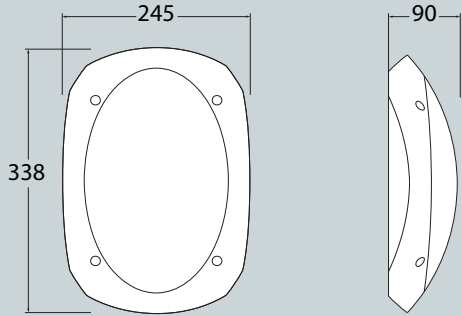

CECCHI GX53	
7W	1H3.000.A1K
11W	1H3.000.B1K
18W	1H3.000.E1K
CCT SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K/6500K	
	
Pcs 16 Kg 18,7 mc 0,194	

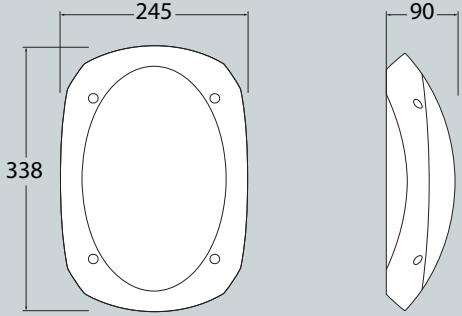CECCHI E27	
E27 lampholder	1H3.000.E27
E27 with sensor	1H3.000.ES7
	
Pcs 16 Kg 15,5 mc 0,194	

RITA

CLASSIC ROUND



Round bulkhead lamp in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin settable GX53 LED or E27** version available. Insulation class II, Protection rating IP66.



Plafoniera circolare in stile classico, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a LED GX53 con Kelvin impostabile o E27. Classe di isolamento II, grado di protezione IP66.



1T3.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



RITA COMPONENTS

IP 66



COVER with classic design made of shockproof resin material, UV-rays stabilized.

COVER in stile classico realizzata in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalamпада GX53 o di piatto riflettente in resina bianca e portalamпада E27.

RITA

— ø 355 —



Dimensions and weight

Diameter: ø 355 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Opal

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified approved, long-life, efficient and Kelvin settable **GX53 LED lamp included**. Different wattage available.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

		100 - 240 V		*ADD. SUFFIX
	7 W	800 Lm	6500 K	.A1K
			4000 K	
			2700 K	
	11 W	1300 Lm	6500 K	.B1K
			4000 K	
			2700 K	
18 W	2000 Lm	6500 K	.E1K	
		4000 K		
		2700 K		

7W
 11W
 18W
 =
 60W
 100W
 150W
SAVE 90%

E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).


E27 (CFL -LED)	max 160 mm	.E27
E27 + SENSOR (CFL -LED)		.ES7

LED LAMPS



Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

RITA
CLASSIC ROUND



1T3.000





RITA GX53	
7W	1T3.000.A1K
11W	1T3.000.B1K
18W	1T3.000.E1K

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

Pcs 12
Kg 17,8
mc 0,198

RITA E27	
E27 lampholder	1T3.000.E27
E27 with sensor	1T3.000.ES7

Pcs 12
Kg 15,4
mc 0,198

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES


LUCIA RANGE

ROUND



Round bulkhead lamp with ring, eyelid or guard cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for ceiling, wall and post installation also with bracket angled at 35°. Supplied as option with coloured backlit base. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

*Plafoniera circolare con cover ad anello, a palpebra o a manubrio. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete, a soffitto e a palo anche con braccio angolato a 35°. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*



1R3.000.OR1

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6



LUCIA COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.


COVER in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlit colours to create a coloured effect on wall and ceilings.

BASE realizzata in resina antiurto. Fornita completa di portalamпада E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.



LUCIA

Dimensions and weight
Diameter: \varnothing 300 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS



Technical details on page 552.

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, and Kelvin **settable GX53 LED lamp included**. Different wattages available.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V		*ADD. SUFFIX			
	7 W	800 Lm	6500 K	.A1K	
			4000 K		
			2700 K		
	11 W	1300 Lm	6500 K		.B1K
			4000 K		
			2700 K		
18 W	2000 Lm	6500 K	.E1K		
		4000 K			
		2700 K			

7W 11W 18W = 60W 100W 150W incandescent

SAVE 90%

E27

FULLY PRE-WIRED




Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

E27 (CFL -LED)	max 160 mm	*ADD. SUFFIX .E27
E27 + SENSOR (CFL -LED)		.ES7

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

BOLLARD VERSION



Lucia bulkhead range can be mounted on a pole with or without an angled bracket. More detailed information at page 184.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

LUCIA RANGE

ROUND





LUCIA E27
1R3.000.E27

Pcs 16
Kg 16,8
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

LUCIA GX53

7W	1R3.000.A1K
11W	1R3.000.B1K
18W	1R3.000.E1K

REMI/LUCIA E27
1R3.602.E27

Pcs 16
Kg 20
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/LUCIA GX53

7W	1R3.602.A1K
11W	1R3.602.B1K
18W	1R3.602.E1K

LUCIA-EL E27
2R3.000.E27

Pcs 16
Kg 16,8
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

LUCIA-EL GX53

7W	2R3.000.A1K
11W	2R3.000.B1K
18W	2R3.000.E1K

REMI/LUCIA-EL E27
2R3.602.E27

Pcs 16
Kg 20
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/LUCIA-EL GX53

7W	2R3.602.A1K
11W	2R3.602.B1K
18W	2R3.602.E1K

LUCIA-GD E27
3R3.000.E27

Pcs 16
Kg 16,8
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

LUCIA-GD GX53

7W	3R3.000.A1K
11W	3R3.000.B1K
18W	3R3.000.E1K

REMI/LUCIA-GD E27
3R3.602.E27

Pcs 16
Kg 20
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/LUCIA-GD GX53

7W	3R3.602.A1K
11W	3R3.602.B1K
18W	3R3.602.E1K

COMPANY UP/DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

MADDI RANGE

OVAL



Oval bulkhead lamp with ring, vertical eyelid or horizontal eyelid cover. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall, ceiling and post installation also with bracket angled at 35°. Supplied as option with coloured backlit base. **Kelvin settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.

*Plafoniera ovale con cover ad anello o a palpebra (orizzontale o verticale). Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete, a soffitto e a palo anche con braccio angolato a 35°. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin impostabile** o **E27**. Classe di isolamento II, grado di protezione IP66.*




1V3.000

CCT SETTABLE

2700 K 4000 K 6500 K

SDCM <6

MADE IN ITALY



MADDI COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized. Ring, eyelid and grid versions available.


COVER in resina antiurto stabilizzata ai raggi UV, disponibile nella versione ad anello, a palpebra e a griglia.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma silicica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlight colours to create a coloured effect on wall and ceilings.

BASE realizzata in resina antiurto. Fornita completa di portalamпада E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.



MADDI

Dimensions and weight
Width: 230 mm
Height: 330 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

Black White Grey

Diffuser PMMA:

Opal

LED LAMPS



Technical details on page 552.

GX53 LED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, and **kelvin settable GX53 LED lamp included**. Different wattages available.

- **COST SAVING:** long-life and efficient LED light sources
- **BUILT-IN DRIVER:** Quick and easy lamp replacement for a very simple maintenance after installation.

100 - 240 V		*ADD. SUFFIX			
	7 W	800 Lm	6500 K	.A1K	
					4000 K
					2700 K
	11 W	1300 Lm	6500 K	.B1K	
					4000 K
					2700 K
18 W	2000 Lm	6500 K	.E1K		
				4000 K	
				2700 K	

7W 11W 18W = 60W 100W 150W incandescent

SAVE 90%

E27




Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

E27 (CFL-LED)	max 160 mm	*ADD. SUFFIX .E27
E27 + SENSOR (CFL-LED)		.ES7

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambience.

BOLLARD VERSION




Maddi bulkhead range can be mounted on a pole with or without an angled bracket. More detailed information at page 190.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

MADDI RANGE

OVAL





MADDI E27
1V3.000.E27

Pcs 16
Kg 15,5
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

MADDI GX53

7W	1V3.000.A1K
11W	1V3.000.B1K
18W	1V3.000.E1K

REMI/MADDI E27
1V3.602.E27

Pcs 16
Kg 18,7
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/MADDI GX53

7W	1V3.602.A1K
11W	1V3.602.B1K
18W	1V3.602.E1K

MADDI-VE E27
2V3.000.E27

Pcs 16
Kg 15,5
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

MADDI-VE GX53

7W	2V3.000.A1K
11W	2V3.000.B1K
18W	2V3.000.E1K

REMI/MADDI-VE E27
2V3.602.E27

Pcs 16
Kg 18,7
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/MADDI-VE GX53

7W	2V3.602.A1K
11W	2V3.602.B1K
18W	2V3.602.E1K

MADDI-HL E27
3V3.000.E27

Pcs 16
Kg 15,5
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

MADDI-HL GX53

7W	3V3.000.A1K
11W	3V3.000.B1K
18W	3V3.000.E1K

REMI/MADDI-HL E27
3V3.602.E27

Pcs 16
Kg 18,7
mc 0,194

CCT SETTABLE GX53 LED LAMP INCLUDED
2700K/4000K/6500K

REMI/MADDI-HL GX53

7W	3V3.602.A1K
11W	3V3.602.B1K
18W	3V3.602.E1K



GARDEN

REFERENCES

LAMPS

POST

URBAN MODERN

URBAN CLASSIC

GARDEN

BULKHEAD

BOLLARD

FLOODLIGHT

BRICKLIGHT

IN-GROUND

DOWNLIGHT

UP&DOWN

COMPANY

ANNA

SMALL SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED a filamento adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.

E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

E22.110.F1R



MADE IN ITALY



ANNA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

ANNA

E22.000 *



220



310

Ø 60

Dimensions and weight

Height: 310 mm
Width: 220 mm
Depth: 192 mm
Weight: 1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		.E27	
	6 W	800 Lm	4000 K	.F1L	
			2700 K	.F1R	
	8 W	1000 Lm	4000 K	.M1L	
			2700 K	.M1R	
	12 W	1500 Lm	4000 K	.N1L	
			2700 K	.N1R	

- **PERFECT MATCHING WITH CLASSIC LANTERNS:** clear LED filament lamp with the look and the feeling of a traditional incandescent bulb.
- **SUITABLE FOR OUTDOOR USE:** 100-240 V built-in driver fully protected against heat and humidity by silicone paste.
- **OMNIDIRECTIONAL LIGHT:** 360° light output for a better lighting distribution on hexagonal and square classic lanterns.
- **HIGH EFFICIENCY:** 90% energy saving.

**6W
8W
12W** = **60W
75W
100W** incandescent


SAVE 90%

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE

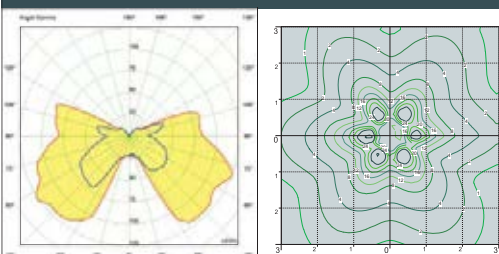

ANNA lantern clear with Fumagalli Filament Led Lamp 6W.

POST height 1mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ANNA

SMALL SIZE





BISSO/ANNA	
E27 lampholder	E22.131.E27
6W LED	E22.131.F1R
8W LED	E22.131.M1R
12W LED	E22.131.N1R
Pcs 18 Kg 21,2 mc 0,209	
2700K*	

SICHEM/ANNA	
E27 lampholder	E22.120.E27
6W LED	E22.120.F1R
8W LED	E22.120.M1R
12W LED	E22.120.N1R
Pcs 18 Kg 21,2 mc 0,209	
2700K*	

ANNA	
E22.000	
Pcs 1 Kg 1 mc 0,011	

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES
.F1L(6W) .M1L (8W) .N1L (12W)

MIKROLOT/ANNA	
E27 lampholder	E22.110.E27
6W LED	E22.110.F1R
8W LED	E22.110.M1R
12W LED	E22.110.N1R
Pcs 18 Kg 21,2 mc 0,209	
2700K*	

PORPORA/ANNA	
E27 lampholder	E22.141.E27
6W LED	E22.141.F1R
8W LED	E22.141.M1R
12W LED	E22.141.N1R
Pcs 1 Kg 3,5 mc 0,024	
2700K*	

MIZAR/ANNA resin	
E27 lampholder	E22.151.E27
6W LED	E22.151.F1R
8W LED	E22.151.M1R
12W LED	E22.151.N1R
Pcs 1 Kg 2,4 mc 0,044	
2700K*	

ALOE'.R/ANNA resin	
E27 lampholder	E22.163.E27
6W LED	E22.163.F1R
8W LED	E22.163.M1R
12W LED	E22.163.N1R
Pcs 2 Kg 8 mc 0,121	
2700K*	

ARTU'/ANNA	
E27 lampholder	E22.158.E27
6W LED	E22.158.F1R
8W LED	E22.158.M1R
12W LED	E22.158.N1R
Pcs 1 Kg 9 mc 0,148	
2700K*	

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

ANNA

SMALL SIZE



E22.156.S30.F1R



E22.156.S30.F1R



E22.156.S20.F1R

MADE IN ITALY



ARTU' BISSO/ANNA 2+1

E27 lampholder	E22.158.S21.E27
6W LED	E22.158.S21.F1R
8W LED	E22.158.S21.M1R
12W LED	E22.158.S21.N1R

Pcs 1
Kg 12,1
mc 0,176

2700K*

ARTU' BISSO/ANNA 3+1

E27 lampholder	E22.158.S31.E27
6W LED	E22.158.S31.F1R
8W LED	E22.158.S31.M1R
12W LED	E22.158.S31.N1R

Pcs 1
Kg 13,1
mc 0,176

2700K*

GIGI BISSO/ANNA 2+1

E27 lampholder	E22.156.S21.E27
6W LED	E22.156.S21.F1R
8W LED	E22.156.S21.M1R
12W LED	E22.156.S21.N1R

Pcs 1
Kg 14,1
mc 0,182

2700K*

GIGI BISSO/ANNA 3+1

E27 lampholder	E22.156.S31.E27
6W LED	E22.156.S31.F1R
8W LED	E22.156.S31.M1R
12W LED	E22.156.S31.N1R

Pcs 1
Kg 15,1
mc 0,182

2700K*

ARTU' BISSO/ANNA 2L

E27 lampholder	E22.158.S20.E27
6W LED	E22.158.S20.F1R
8W LED	E22.158.S20.M1R
12W LED	E22.158.S20.N1R

Pcs 1
Kg 11,1
mc 0,176

2700K*

Ø 245

ARTU' BISSO/ANNA 3L

E27 lampholder	E22.158.S30.E27
6W LED	E22.158.S30.F1R
8W LED	E22.158.S30.M1R
12W LED	E22.158.S30.N1R

Pcs 1
Kg 12,1
mc 0,176

2700K*

Ø 245

GIGI BISSO/ANNA 2L

E27 lampholder	E22.156.S20.E27
6W LED	E22.156.S20.F1R
8W LED	E22.156.S20.M1R
12W LED	E22.156.S20.N1R

Pcs 1
Kg 13,1
mc 0,182

2700K*

Ø 245

GIGI BISSO/ANNA 3L

E27 lampholder	E22.156.S30.E27
6W LED	E22.156.S30.F1R
8W LED	E22.156.S30.M1R
12W LED	E22.156.S30.N1R

Pcs 1
Kg 14,1
mc 0,182

2700K*

Ø 245

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SABA

SMALL SIZE

E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED a filamento** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



K22.131.F1R



E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500

		UV-TREATED	DOUBLE INSULATION
RECYCLABLE	ANTI-SHOCK	TEMPERATURE	RESIDENTIAL FILAMENT LED
			WALL HANGING POST





SABA - LANTERN COMPONENTS

Decorative PINNACLE to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance,.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



Dimensions and weight

Height: 320 mm
Width: 220 mm
Depth: 192 mm
Weight: 1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 VERSIONS

100 - 240 V *ADD. SUFFIX

E27 (CFL-LED)	max 160 mm		.E27
	6 W	800 Lm	
	8 W	1000 Lm	4000 K .F1L
			2700 K .F1R
12 W	1500 Lm	4000 K .M1L	
		2700 K .M1R	
		4000 K .N1L	
		2700 K .N1R	

- PERFECT MATCHING WITH CLASSIC LANTERNS:** clear LED filament lamp with the look and the feeling of a traditional incandescent bulb.
- SUITABLE FOR OUTDOOR USE:** 100-240 V built-in driver fully protected against heat and humidity by silicone paste.
- OMNIDIRECTIONAL LIGHT:** 360° light output for a better lighting distribution on hexagonal and square classic lanterns.
- HIGH EFFICIENCY:** 90% energy saving.

6W 8W 12W = 60W 75W 100W incandescent

SAVE 90%

LED LAMPS

Technical details on page 552.

PHOTOMETRIC DATA SAMPLE

SABA lantern clear with Fumagalli Filament Led Lamp 6W.


POST height 1mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE



K22.131.F1R

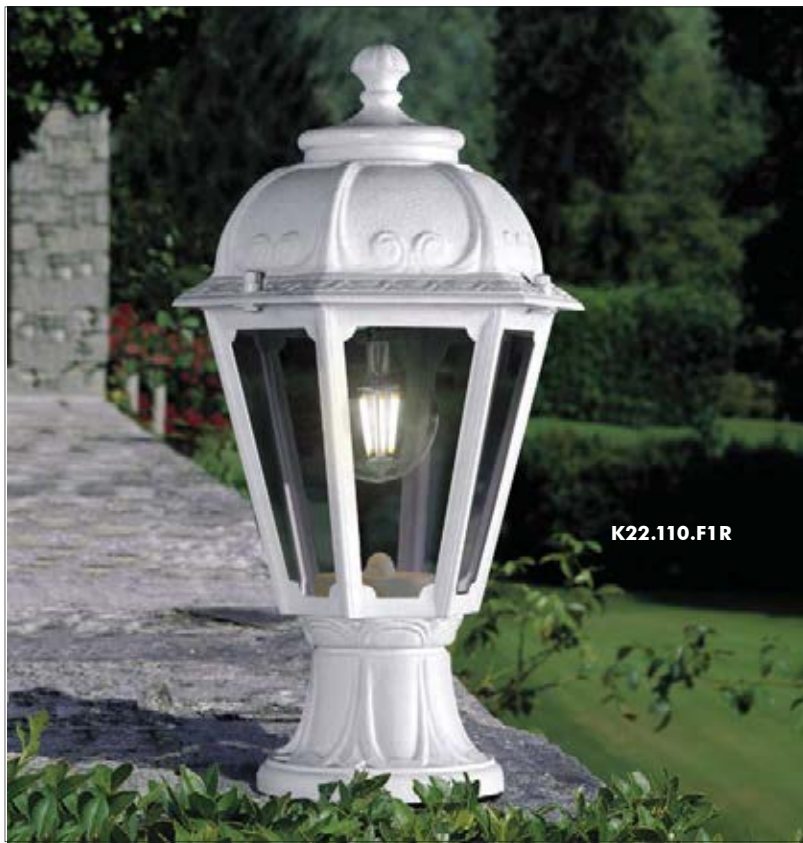

K22.110.F1R



K22.120.F1R

MADE IN ITALY



BISSO/SABA	
E27 lampholder	K22.131.E27
6W LED	K22.131.F1R
8W LED	K22.131.M1R
12W LED	K22.131.N1R
Pcs 18 Kg 21,2 mc 0,209	2700K*

SICHEM/SABA	
E27 lampholder	K22.120.E27
6W LED	K22.120.F1R
8W LED	K22.120.M1R
12W LED	K22.120.N1R
Pcs 18 Kg 21,2 mc 0,209	2700K*

SABA	
K22.000	
Pcs 1 Kg 1 mc 0,011	

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES .F1L(6W) .M1L (8W) .N1L (12W)

MIKROLOT/SABA	
E27 lampholder	K22.110.E27
6W LED	K22.110.F1R
8W LED	K22.110.M1R
12W LED	K22.110.N1R
Pcs 18 Kg 21,2 mc 0,209	2700K*

PORPORA/SABA	
E27 lampholder	K22.141.E27
6W LED	K22.141.F1R
8W LED	K22.141.M1R
12W LED	K22.141.N1R
Pcs 1 Kg 3,5 mc 0,024	2700K*


MIZAR/SABA resin	
E27 lampholder	K22.151.E27
6W LED	K22.151.F1R
8W LED	K22.151.M1R
12W LED	K22.151.N1R
Pcs 1 Kg 2,4 mc 0,044	2700K*

ALOE'.R/SABA resin	
E27 lampholder	K22.163.E27
6W LED	K22.163.F1R
8W LED	K22.163.M1R
12W LED	K22.163.N1R
Pcs 2 Kg 8 mc 0,121	2700K*

ARTU'/SABA	
E27 lampholder	K22.158.E27
6W LED	K22.158.F1R
8W LED	K22.158.M1R
12W LED	K22.158.N1R
Pcs 1 Kg 9 mc 0,148	2700K*

SABA

SMALL SIZE

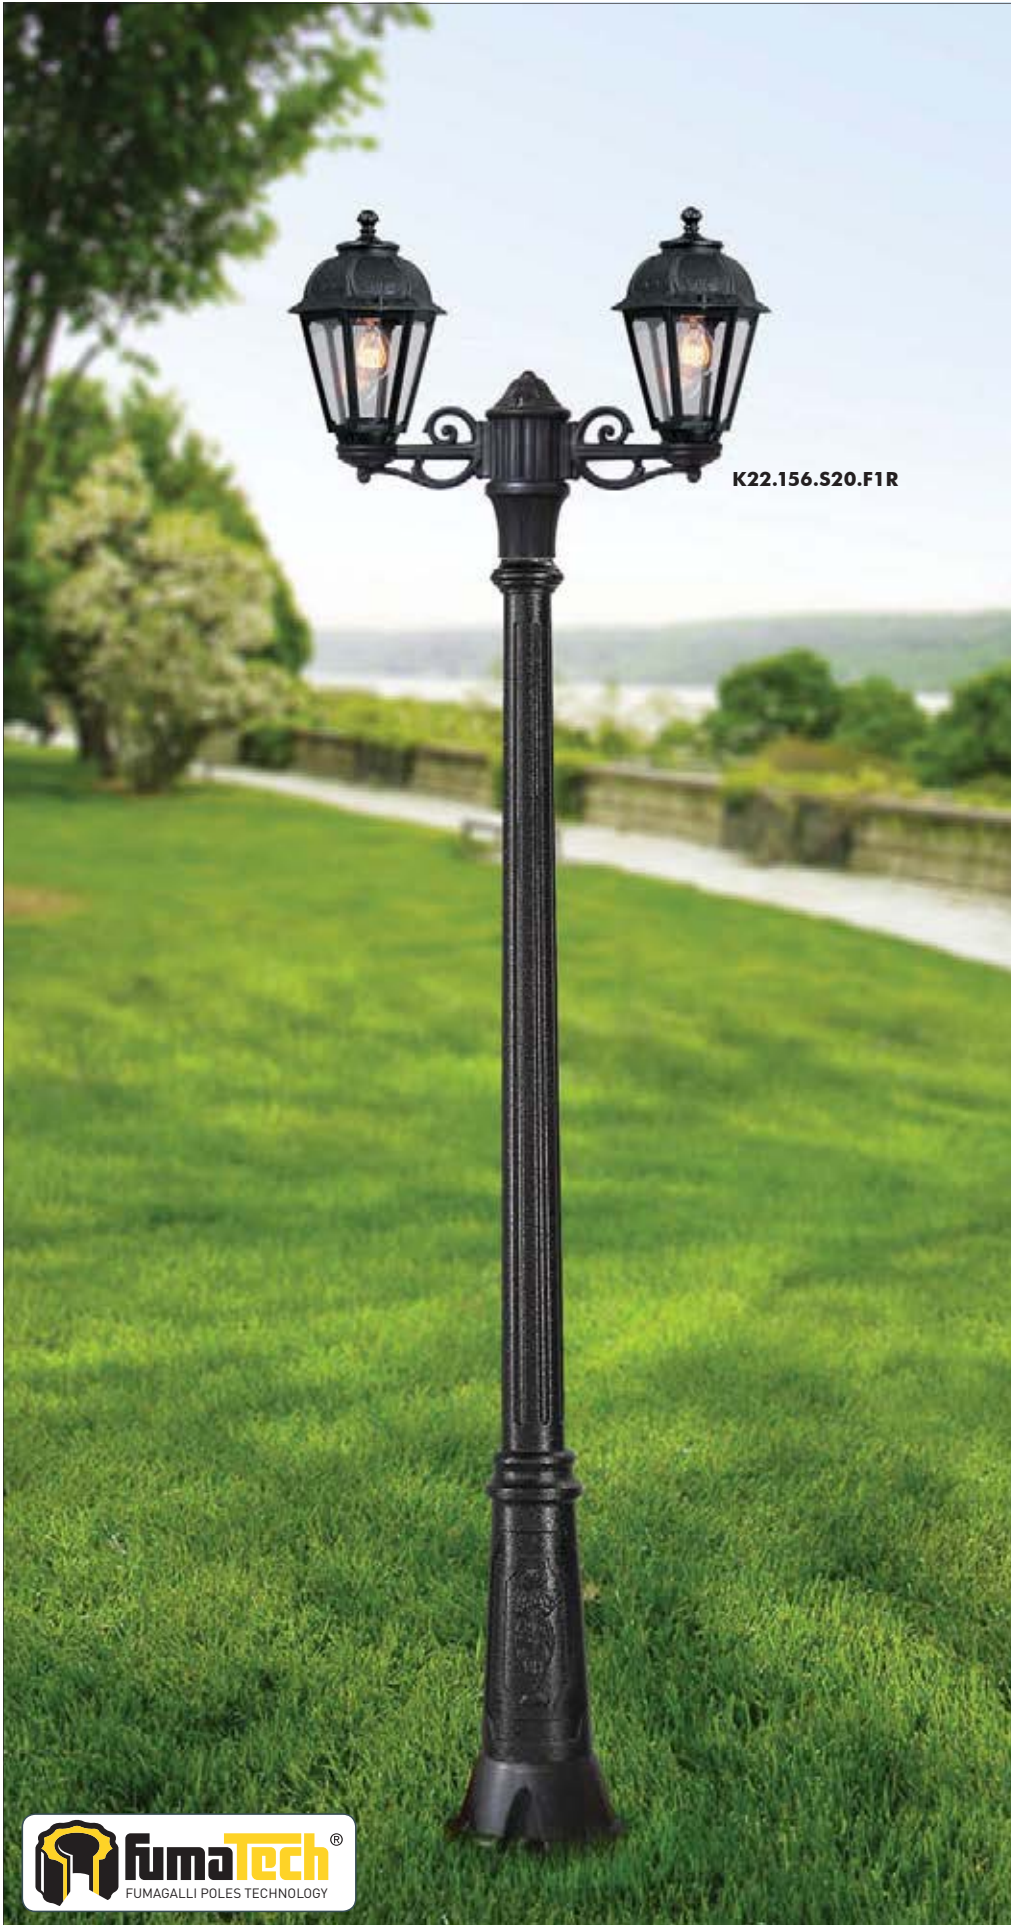

K22.156.S20.F1R



K22.156.S30.F1R



K22.156.S20.F1R



MADE IN ITALY



ARTU' BISSO/SABA 2+1

E27 lampholder	K22.158.S21.E27
6W LED	K22.158.S21.F1R
8W LED	K22.158.S21.M1R
12W LED	K22.158.S21.N1R

Pcs 1
Kg 12,1
mc 0,176

2700K*

ARTU' BISSO/SABA 3+1

E27 lampholder	K22.158.S31.E27
6W LED	K22.158.S31.F1R
8W LED	K22.158.S31.M1R
12W LED	K22.158.S31.N1R

Pcs 1
Kg 13,1
mc 0,176

2700K*

GIGI BISSO/SABA 2+1

E27 lampholder	K22.156.S21.E27
6W LED	K22.156.S21.F1R
8W LED	K22.156.S21.M1R
12W LED	K22.156.S21.N1R

Pcs 1
Kg 14,1
mc 0,182

2700K*

GIGI BISSO/SABA 3+1

E27 lampholder	K22.156.S31.E27
6W LED	K22.156.S31.F1R
8W LED	K22.156.S31.M1R
12W LED	K22.156.S31.N1R

Pcs 1
Kg 15,1
mc 0,182

2700K*

ARTU' BISSO/SABA 2L

E27 lampholder	K22.158.S20.E27
6W LED	K22.158.S20.F1R
8W LED	K22.158.S20.M1R
12W LED	K22.158.S20.N1R

Pcs 1
Kg 11,1
mc 0,176

2700K*

Ø 245

ARTU' BISSO/SABA 3L

E27 lampholder	K22.158.S30.E27
6W LED	K22.158.S30.F1R
8W LED	K22.158.S30.M1R
12W LED	K22.158.S30.N1R

Pcs 1
Kg 12,1
mc 0,176

2700K*

Ø 245

GIGI BISSO/SABA 2L

E27 lampholder	K22.156.S20.E27
6W LED	K22.156.S20.F1R
8W LED	K22.156.S20.M1R
12W LED	K22.156.S20.N1R

Pcs 1
Kg 13,1
mc 0,182

2700K*

Ø 245

GIGI BISSO/SABA 3L

E27 lampholder	K22.156.S30.E27
6W LED	K22.156.S30.F1R
8W LED	K22.156.S30.M1R
12W LED	K22.156.S30.N1R

Pcs 1
Kg 14,1
mc 0,182

2700K*

Ø 245

RUT

MEDIUM SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED a filamento adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



E26.110.M1R

E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION





RUT - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

RUT

E26.000 *



Dimensions and weight

Height: 410 mm
Width: 260 mm
Depth: 227 mm
Weight: 1,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		.E27	
	6 W	800 Lm	4000 K	.F1L	
			2700 K	.F1R	
	8 W	1000 Lm	4000 K	.M1L	
			2700 K	.M1R	
	12 W	1500 Lm	4000 K	.N1L	
			2700 K	.N1R	

- **PERFECT MATCHING WITH CLASSIC LANTERNS:** clear LED filament lamp with the look and the feeling of a traditional incandescent bulb.
- **SUITABLE FOR OUTDOOR USE:** 100-240 V built-in driver fully protected against heat and humidity by silicone paste.
- **OMNIDIRECTIONAL LIGHT:** 360° light output for a better lighting distribution on hexagonal and square classic lanterns.
- **HIGH EFFICIENCY:** 90% energy saving.

6W
8W
12W = 60W
75W
100W incandescent


SAVE 90%

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE

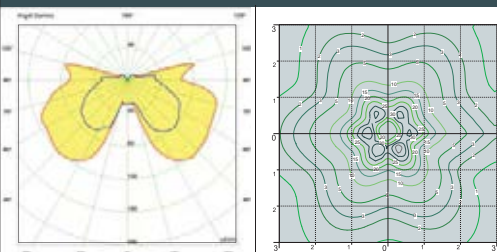

RUT lantern clear with Fumagalli Filament Led Lamp 8W.


POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

RUT

MEDIUM SIZE

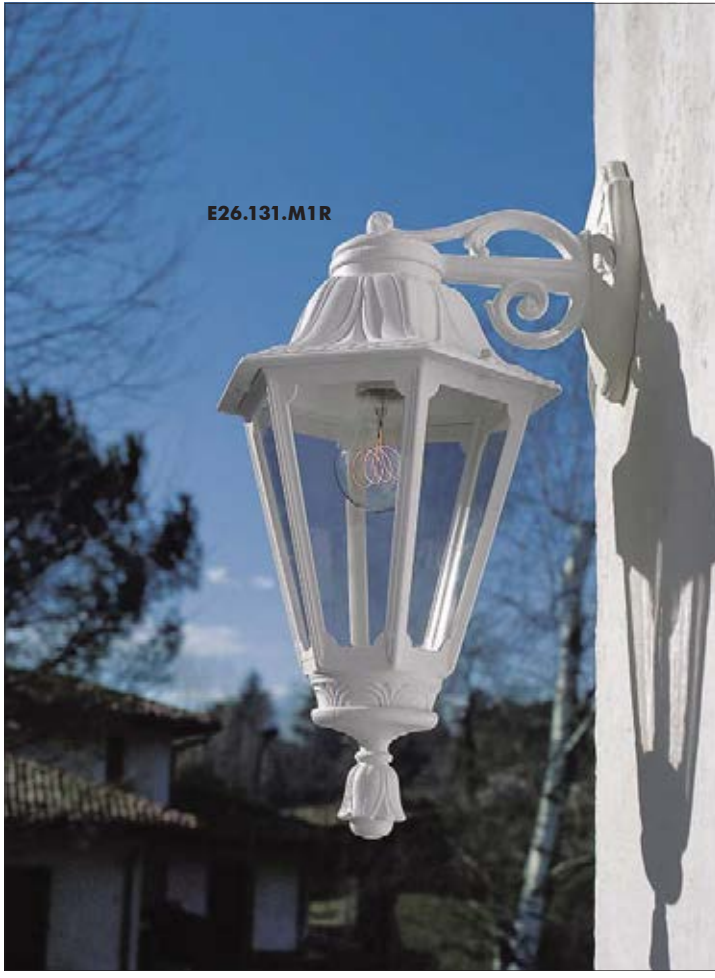

E26.131.M1R



E26.158.M1R



E26.120.M1R





BISSO/RUT	
E27 lampholder	E26.131.E27
6W LED	E26.131.F1R
8W LED	E26.131.M1R
12W LED	E26.131.N1R
Pcs 12 Kg 19 mc 0,225	2700K*

SICHEM/RUT	
E27 lampholder	E26.120.E27
6W LED	E26.120.F1R
8W LED	E26.120.M1R
12W LED	E26.120.N1R
Pcs 12 Kg 19 mc 0,225	2700K*

RUT	
E26.000	
Pcs 1 Kg 1,3 mc 0,018	

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES
.F1L(6W) .M1L (8W) .N1L (12W)

MINILOT/RUT	
E27 lampholder	E26.111.E27
6W LED	E26.111.F1R
8W LED	E26.111.M1R
12W LED	E26.111.N1R
Pcs 12 Kg 19 mc 0,225	2700K*

PORPORA/RUT	
E27 lampholder	E26.141.E27
6W LED	E26.141.F1R
8W LED	E26.141.M1R
12W LED	E26.141.N1R
Pcs 1 Kg 4 mc 0,034	2700K*

IAFET/RUT resin	
E27 lampholder	E26.162.E27
6W LED	E26.162.F1R
8W LED	E26.162.M1R
12W LED	E26.162.N1R
Pcs 2 Kg 79 mc 0,086	2700K*

MIZAR/RUT resin	
E27 lampholder	E26.151.E27
6W LED	E26.151.F1R
8W LED	E26.151.M1R
12W LED	E26.151.N1R
Pcs 1 Kg 3 mc 0,07	2700K*

ALOE'.R/RUT resin	
E27 lampholder	E26.163.E27
6W LED	E26.163.F1R
8W LED	E26.163.M1R
12W LED	E26.163.N1R
Pcs 2 Kg 8,6 mc 0,121	2700K*

ARTU'/RUT	
E27 lampholder	E26.158.E27
6W LED	E26.158.F1R
8W LED	E26.158.M1R
12W LED	E26.158.N1R
Pcs 1 Kg 9,6 mc 0,148	2700K*

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

RUT

MEDIUM SIZE



E26.157.S30.M1R



E26.157.S20.M1L



E26.156.M1R





RICU BISSO/RUT 2+1	
E27 lampholder	E26.157.S21.E27
6W LED	E26.157.S21.F1R
8W LED	E26.157.S21.M1R
12W LED	E26.157.S21.N1R
Pcs 1 Kg 15,2 mc 0,214	2700K*

RICU BISSO/RUT 3+1	
E27 lampholder	E26.157.S31.E27
6W LED	E26.157.S31.F1R
8W LED	E26.157.S31.M1R
12W LED	E26.157.S31.N1R
Pcs 1 Kg 16,5 mc 0,214	2700K*

GIGI/RUT	
E27 lampholder	E26.156.E27
6W LED	E26.156.F1R
8W LED	E26.156.M1R
12W LED	E26.156.N1R
Pcs 1 Kg 10,9 mc 0,172	2700K*

RICU/RUT	
E27 lampholder	E26.157.E27
6W LED	E26.157.F1R
8W LED	E26.157.M1R
12W LED	E26.157.N1R
Pcs 1 Kg 11,7 mc 0,18	2700K*

RICU BISSO/RUT 2L	
E27 lampholder	E26.157.S20.E27
6W LED	E26.157.S20.F1R
8W LED	E26.157.S20.M1R
12W LED	E26.157.S20.N1R
Pcs 1 Kg 14,2 mc 0,214	2700K*

RICU BISSO/RUT 3L	
E27 lampholder	E26.157.S30.E27
6W LED	E26.157.S30.F1R
8W LED	E26.157.S30.M1R
12W LED	E26.157.S30.N1R
Pcs 1 Kg 15,2 mc 0,214	2700K*

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SALEM

MEDIUM SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED a filamento** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500

K26.111.M1R





SALEM - LANTERN COMPONENTS

IP55

Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance,.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



Dimensions and weight
Height: 410 mm
Width: 260 mm
Depth: 227 mm
Weight: 1,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 VERSIONS

		100 - 240 V		*ADD. SUFFIX	
	6 W	800 Lm	4000 K	.E27	
			2700 K	.F1L	
	8 W	1000 Lm	4000 K	.F1R	
			2700 K	.M1L	
	12 W	1500 Lm	4000 K	.M1R	
			2700 K	.N1L	
			.N1R		

max 160 mm

PERFECT MATCHING WITH CLASSIC LANTERNS: clear LED filament lamp with the look and the feeling of a traditional incandescent bulb.

SUITABLE FOR OUTDOOR USE: 100-240 V built-in driver fully protected against heat and humidity by silicone paste.

OMNIDIRECTIONAL LIGHT: 360° light output for a better lighting distribution on hexagonal and square classic lanterns.

HIGH EFFICIENCY: 90% energy saving.

6W
8W
12W

=

60W
75W
100W

incandescent

SAVE 90%

LED LAMPS

Technical details on page 552.

PHOTOMETRIC DATA SAMPLE

SALEM lantern clear with Fumagalli Filament Led Lamp 8W.

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

SALEM
MEDIUM SIZE



K26.131.M1R



K26.120



K26.151.M1R

MADE IN ITALY



BISSO/SALEM	
E27 lampholder	K26.131.E27
6W LED	K26.131.F1R
8W LED	K26.131.M1R
12W LED	K26.131.N1R
Pcs 12 Kg 19 mc 0,225	2700K*

SICHEM/SALEM	
E27 lampholder	K26.120.E27
6W LED	K26.120.F1R
8W LED	K26.120.M1R
12W LED	K26.120.N1R
Pcs 12 Kg 19 mc 0,225	2700K*

SALEM	
K26.000	
Pcs 1 Kg 1,3 mc 0,018	

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES .F1L(6W) .M1L (8W) .N1L (12W)

MINILOT/SALEM	
E27 lampholder	K26.111.E27
6W LED	K26.111.F1R
8W LED	K26.111.M1R
12W LED	K26.111.N1R
Pcs 12 Kg 19 mc 0,225	2700K*

PORPORA/SALEM	
E27 lampholder	K26.141.E27
6W LED	K26.141.F1R
8W LED	K26.141.M1R
12W LED	K26.141.N1R
Pcs 1 Kg 4 mc 0,034	2700K*

IAFET/SALEM resin	
E27 lampholder	K26.162.E27
6W LED	K26.162.F1R
8W LED	K26.162.M1R
12W LED	K26.162.N1R
Pcs 2 Kg 79 mc 0,086	2700K*

MIZAR/SALEM resin	
E27 lampholder	K26.151.E27
6W LED	K26.151.F1R
8W LED	K26.151.M1R
12W LED	K26.151.N1R
Pcs 1 Kg 3 mc 0,07	2700K*

ALOE'R/SALEM resin	
E27 lampholder	K26.163.E27
6W LED	K26.163.F1R
8W LED	K26.163.M1R
12W LED	K26.163.N1R
Pcs 2 Kg 8,6 mc 0,121	2700K*

ARTU'/SALEM	
E27 lampholder	K26.158.E27
6W LED	K26.158.F1R
8W LED	K26.158.M1R
12W LED	K26.158.N1R
Pcs 1 Kg 9,6 mc 0,148	2700K*

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

SALEM

MEDIUM SIZE



K26.157.S30.M1R



K26.157.S20.M1R



K26.156.M1R





RICU BISSO/SALEM 2+1	
E27 lampholder	K26.157.S21.E27
6W LED	K26.157.S21.F1R
8W LED	K26.157.S21.M1R
12W LED	K26.157.S21.N1R
Pcs 1 Kg 13 mc 0,214	2700K*

RICU BISSO/SALEM 3+1	
E27 lampholder	K26.157.S31.E27
6W LED	K26.157.S31.F1R
8W LED	K26.157.S31.M1R
12W LED	K26.157.S31.N1R
Pcs 1 Kg 14,3 mc 0,214	2700K*

GIGI/SALEM	
E27 lampholder	K26.156.E27
6W LED	K26.156.F1R
8W LED	K26.156.M1R
12W LED	K26.156.N1R
Pcs 1 Kg 10,9 mc 0,172	2700K*

RICU/SALEM	
E27 lampholder	K26.157.E27
6W LED	K26.157.F1R
8W LED	K26.157.M1R
12W LED	K26.157.N1R
Pcs 1 Kg 11,7 mc 0,18	2700K*

RICU BISSO/SALEM 2L	
E27 lampholder	K26.157.S20.E27
6W LED	K26.157.S20.F1R
8W LED	K26.157.S20.M1R
12W LED	K26.157.S20.N1R
Pcs 1 Kg 14,2 mc 0,214	2700K*

RICU BISSO/SALEM 3L	
E27 lampholder	K26.157.S30.E27
6W LED	K26.157.S30.F1R
8W LED	K26.157.S30.M1R
12W LED	K26.157.S30.N1R
Pcs 1 Kg 15,2 mc 0,214	2700K*

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GOLIA

MEDIUM SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lantern quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED a filamento adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500

Q23.131.M1R

MADE IN ITALY



GOLIA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).



Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.



DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

GOLIA

Q23.000 *



Dimensions and weight

Height: 360 mm
Width: 230 mm
Depth: 230 mm
Weight: 1,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		.E27	
	6 W	800 Lm	4000 K	.F1L	
			2700 K	.F1R	
	8 W	1000 Lm	4000 K	.M1L	
			2700 K	.M1R	
	12 W	1500 Lm	4000 K	.N1L	
			2700 K	.N1R	

- **PERFECT MATCHING WITH CLASSIC LANTERNS:** clear LED filament lamp with the look and the feeling of a traditional incandescent bulb.
- **SUITABLE FOR OUTDOOR USE:** 100-240 V built-in driver fully protected against heat and humidity by silicone paste.
- **OMNIDIRECTIONAL LIGHT:** 360° light output for a better lighting distribution on hexagonal and square classic lanterns.
- **HIGH EFFICIENCY:** 90% energy saving.

6W
8W
12W = 60W
75W
100W incandescent



SAVE 90%

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE



GOLIA lantern clear with Fumagalli Filament Led Lamp 8W.

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GOLIA

MEDIUM SIZE



Q23.111.M1R



Q23.151



Q23.120.M1R

MADE IN ITALY



BISSO/GOLIA

E27 lampholder	Q23.131.E27
6W LED	Q23.131.F1R
8W LED	Q23.131.M1R
12W LED	Q23.131.N1R

Pcs 12
Kg 19
mc 0,225

2700K*

PORPORA/GOLIA

E27 lampholder	Q23.141.E27
6W LED	Q23.141.F1R
8W LED	Q23.141.M1R
12W LED	Q23.141.N1R

Pcs 1
Kg 4
mc 0,034

2700K*

MINILOT/GOLIA

E27 lampholder	Q23.111.E27
6W LED	Q23.111.F1R
8W LED	Q23.111.M1R
12W LED	Q23.111.N1R

Pcs 12
Kg 19
mc 0,225

2700K*

GOLIA

Q23.000

Pcs 1
Kg 1,3
mc 0,018

2700K*

SICHEM/GOLIA

E27 lampholder	Q23.120.E27
6W LED	Q23.120.F1R
8W LED	Q23.120.M1R
12W LED	Q23.120.N1R

Pcs 12
Kg 19
mc 0,225

2700K*

MIZAR/GOLIA resin

E27 lampholder	Q23.151.E27
6W LED	Q23.151.F1R
8W LED	Q23.151.M1R
12W LED	Q23.151.N1R

Pcs 1
Kg 3
mc 0,07

2700K*

IAFET/GOLIA resin

E27 lampholder	Q23.162.E27
6W LED	Q23.162.F1R
8W LED	Q23.162.M1R
12W LED	Q23.162.N1R

Pcs 2
Kg 7,9
mc 0,086

2700K*

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES .F1L(6W) .M1L(8W) .N1L(12W)

ALOE'R/GOLIA resin

E27 lampholder	Q23.163.E27
6W LED	Q23.163.F1R
8W LED	Q23.163.M1R
12W LED	Q23.163.N1R

Pcs 2
Kg 8,6
mc 0,121

2700K*

ARTU'/GOLIA

E27 lampholder	Q23.158.E27
6W LED	Q23.158.F1R
8W LED	Q23.158.M1R
12W LED	Q23.158.N1R

Pcs 1
Kg 9,6
mc 0,148

2700K*

GIGI/GOLIA

E27 lampholder	Q23.156.E27
6W LED	Q23.156.F1R
8W LED	Q23.156.M1R
12W LED	Q23.156.N1R

Pcs 1
Kg 10,9
mc 0,172

2700K*

RICU/GOLIA

E27 lampholder	Q23.157.E27
6W LED	Q23.157.F1R
8W LED	Q23.157.M1R
12W LED	Q23.157.N1R

Pcs 1
Kg 11,7
mc 0,18

2700K*

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GOLIA

MEDIUM SIZE



Q23.157.S30.M1R




Q23.156.S20.M1R



Q23.151.M1R





GIGI BISSO/GOLIA 2L

E27 lampholder	Q23.156.S20.E27
6W LED	Q23.156.S20.F1R
8W LED	Q23.156.S20.M1R
12W LED	Q23.156.S20.N1R

Pcs 1
Kg 13,5
mc 0,182

Ø 245

GIGI BISSO/GOLIA 3L

E27 lampholder	Q23.156.S30.E27
6W LED	Q23.156.S30.F1R
8W LED	Q23.156.S30.M1R
12W LED	Q23.156.S30.N1R

Pcs 1
Kg 14,7
mc 0,182

Ø 245

GIGI BISSO/GOLIA 2+1

E27 lampholder	Q23.156.S21.E27
6W LED	Q23.156.S21.F1R
8W LED	Q23.156.S21.M1R
12W LED	Q23.156.S21.N1R

Pcs 1
Kg 14,7
mc 0,182

2+1

GIGI BISSO/GOLIA 3+1

E27 lampholder	Q23.156.S31.E27
6W LED	Q23.156.S31.F1R
8W LED	Q23.156.S31.M1R
12W LED	Q23.156.S31.N1R

Pcs 1
Kg 16
mc 0,182

3+1

RICU BISSO/GOLIA 2L

E27 lampholder	Q23.157.S20.E27
6W LED	Q23.157.S20.F1R
8W LED	Q23.157.S20.M1R
12W LED	Q23.157.S20.N1R

Pcs 1
Kg 14,2
mc 0,214

Ø 245

RICU BISSO/GOLIA 3L

E27 lampholder	Q23.157.S30.E27
6W LED	Q23.157.S30.F1R
8W LED	Q23.157.S30.M1R
12W LED	Q23.157.S30.N1R

Pcs 1
Kg 15,2
mc 0,214

Ø 245

RICU BISSO/GOLIA 2+1

E27 lampholder	Q23.157.S21.E27
6W LED	Q23.157.S21.F1R
8W LED	Q23.157.S21.M1R
12W LED	Q23.157.S21.N1R

Pcs 1
Kg 15,2
mc 0,214

2+1

RICU BISSO/GOLIA 3+1

E27 lampholder	Q23.157.S31.E27
6W LED	Q23.157.S31.F1R
8W LED	Q23.157.S31.M1R
12W LED	Q23.157.S31.N1R

Pcs 1
Kg 16,5
mc 0,214

3+1

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

CEFA

MEDIUM SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED a filamento adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



U23.111.M1R

E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500



CEFA - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance,.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

CEFA

U23.000 *



Dimensions and weight

Height: 380 mm
Width: 230 mm
Depth: 230 mm
Weight: 1,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		.E27
	6 W	800 Lm	4000 K	.F1L
			2700 K	.F1R
	8 W	1000 Lm	4000 K	.M1L
			2700 K	.M1R
	12 W	1500 Lm	4000 K	.N1L
			2700 K	.N1R

- PERFECT MATCHING WITH CLASSIC LANTERNS:** clear LED filament lamp with the look and the feeling of a traditional incandescent bulb.
- SUITABLE FOR OUTDOOR USE:** 100-240 V built-in driver fully protected against heat and humidity by silicone paste.
- OMNIDIRECTIONAL LIGHT:** 360° light output for a better lighting distribution on hexagonal and square classic lanterns.
- HIGH EFFICIENCY:** 90% energy saving.

6W 8W 12W = 60W 75W 100W incandescent


SAVE 90%

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE

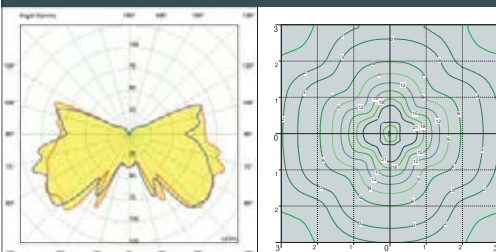

GOLIA lantern clear with Fumagalli Filament Led Lamp 8W.

POST height 2mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

CEFA

MEDIUM SIZE



U23.131.M1R



U23.163.M1R



U23.120.M1R

MADE IN ITALY



BISSO/CEFA

E27 lampholder	U23.131.E27
6W LED	U23.131.F1R
8W LED	U23.131.M1R
12W LED	U23.131.N1R

Pcs 12
Kg 19
mc 0,225

PORPORA/CEFA

E27 lampholder	U23.141.E27
6W LED	U23.141.F1R
8W LED	U23.141.M1R
12W LED	U23.141.N1R

Pcs 1
Kg 4
mc 0,034

MINILOT/CEFA

E27 lampholder	U23.111.E27
6W LED	U23.111.F1R
8W LED	U23.111.M1R
12W LED	U23.111.N1R

Pcs 12
Kg 19
mc 0,225

CEFA

U23.000

Pcs 1
Kg 1,3
mc 0,018

SICHEM/CEFA

E27 lampholder	U23.120.E27
6W LED	U23.120.F1R
8W LED	U23.120.M1R
12W LED	U23.120.N1R

Pcs 12
Kg 19
mc 0,225

MIZAR/CEFA resin

E27 lampholder	U23.151.E27
6W LED	U23.151.F1R
8W LED	U23.151.M1R
12W LED	U23.151.N1R

Pcs 1
Kg 3
mc 0,07

IAFET/CEFA resin

E27 lampholder	U23.162.E27
6W LED	U23.162.F1R
8W LED	U23.162.M1R
12W LED	U23.162.N1R

Pcs 2
Kg 7,9
mc 0,086

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES .F1L(6W) .M1L(8W) .N1L(12W)

ALOE'.R/CEFA resin

E27 lampholder	U23.163.E27
6W LED	U23.163.F1R
8W LED	U23.163.M1R
12W LED	U23.163.N1R

Pcs 2
Kg 8,6
mc 0,121

ARTU'/CEFA

E27 lampholder	U23.158.E27
6W LED	U23.158.F1R
8W LED	U23.158.M1R
12W LED	U23.158.N1R

Pcs 1
Kg 9,6
mc 0,148

GIGI/CEFA

E27 lampholder	U23.156.E27
6W LED	U23.156.F1R
8W LED	U23.156.M1R
12W LED	U23.156.N1R

Pcs 1
Kg 10,9
mc 0,172

RICU/CEFA

E27 lampholder	U23.157.E27
6W LED	U23.157.F1R
8W LED	U23.157.M1R
12W LED	U23.157.N1R

Pcs 1
Kg 11,7
mc 0,18

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

CEFA

MEDIUM SIZE



U23.157.S20.M1R



U23.156.S20.M1R



U23.158.M1R



MADE IN ITALY



GIGI BISSO/CEFA 2L

E27 lampholder	U23.156.S20.E27
6W LED	U23.156.S20.F1R
8W LED	U23.156.S20.M1R
12W LED	U23.156.S20.N1R

Pcs 1
Kg 13,5
mc 0,182

Ø 245

GIGI BISSO/CEFA 3L

E27 lampholder	U23.156.S30.E27
6W LED	U23.156.S30.F1R
8W LED	U23.156.S30.M1R
12W LED	U23.156.S30.N1R

Pcs 1
Kg 14,7
mc 0,182

Ø 245

GIGI BISSO/CEFA 2+1

E27 lampholder	U23.156.S21.E27
6W LED	U23.156.S21.F1R
8W LED	U23.156.S21.M1R
12W LED	U23.156.S21.N1R

Pcs 1
Kg 14,7
mc 0,182

Ø 245

GIGI BISSO/CEFA 3+1

E27 lampholder	U23.156.S31.E27
6W LED	U23.156.S31.F1R
8W LED	U23.156.S31.M1R
12W LED	U23.156.S31.N1R

Pcs 1
Kg 16
mc 0,182

Ø 245

RICU BISSO/CEFA 2L

E27 lampholder	U23.157.S20.E27
6W LED	U23.157.S20.F1R
8W LED	U23.157.S20.M1R
12W LED	U23.157.S20.N1R

Pcs 1
Kg 14,2
mc 0,214

Ø 245

RICU BISSO/CEFA 3L

E27 lampholder	U23.157.S30.E27
6W LED	U23.157.S30.F1R
8W LED	U23.157.S30.M1R
12W LED	U23.157.S30.N1R

Pcs 1
Kg 15,2
mc 0,214

Ø 245

RICU BISSO/CEFA 2+1

E27 lampholder	U23.157.S21.E27
6W LED	U23.157.S21.F1R
8W LED	U23.157.S21.M1R
12W LED	U23.157.S21.N1R

Pcs 1
Kg 15,2
mc 0,214

Ø 245

RICU BISSO/CEFA 3+1

E27 lampholder	U23.157.S31.E27
6W LED	U23.157.S31.F1R
8W LED	U23.157.S31.M1R
12W LED	U23.157.S31.N1R

Pcs 1
Kg 16,5
mc 0,214

Ø 245

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

IESSE
SMALL SIZE



Half lantern in classic style with E27 lampholder, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

Mezza lanterna in stile classico con portalampada E27, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita anche completa di lampadine LED a filamento adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°


90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

M22.000.F1R





IESSE - LANTERN COMPONENTS

IP55



CAGE made of shockproof resin material, UV rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and made of one piece only.

DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e realizzato in un pezzo unico.

WALL PLATE made of shockproof white resin reflective material, UV rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.


BASE A MURO realizzata in resina antiurto in colore bianco riflettente, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita completa di portalamпада E27.

IESSE


E27	M22.000.E27
6W LED	M22.000.F1R
8W LED	M22.000.M1R

Pcs 16
Kg 14
mc 0,224

2700K*



130



IESSE

M22.000 *



Dimensions and weight

Height: 350 mm
Width: 220 mm
Depth: 130 mm
Weight: 0,82 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES .F1L(6W) .M1L (8W) .N1L (12W)

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		*ADD. SUFFIX
	6 W	800 Lm	4000 K	.F1L
			2700 K	.F1R
	8 W	1000 Lm	4000 K	.M1L
			2700 K	.M1R

- PERFECT MATCHING WITH CLASSIC LANTERNS:** clear LED filament lamp with the look and the feeling of a traditional incandescent bulb.
- SUITABLE FOR OUTDOOR USE:** 100-240 V built-in driver fully protected against heat and humidity by silicone paste.
- OMNIDIRECTIONAL LIGHT:** 360° light output for a better lighting distribution on hexagonal and square classic lanterns.
- HIGH EFFICIENCY:** 90% energy saving.

6W
8W = **60W**
75W
incandescent


SAVE 90%

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE

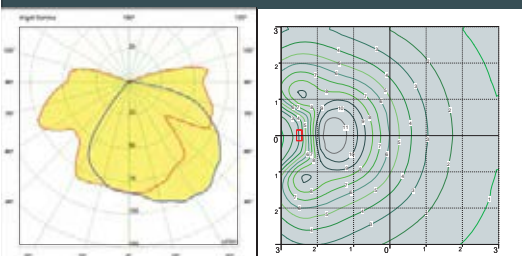

IESSE lantern clear with Fumagalli Filament Led Lamp 6W.

height wall mounting: 2mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

DARIA

LARGE SIZE



Half lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. E27 version with support for ballast fixation or supplied with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

Mezza lanterna in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Versione E27 idonea all'utilizzo di reattori o fornita completa di lampadine LED a filamento adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.

E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY


VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



M28.000.N1R





DARIA - LANTERN COMPONENTS

IP55



CAGE made of shockproof resin material, UV rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and made of one piece only.


DIFFUSORE in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e realizzato in un pezzo unico.

High temperature resistant **WALL PLATE** made of white polycarbonate (PC), with support for ballast fixation. Supplied complete with E27 lampholder.

BASE A MURO realizzata in policarbonato (PC) bianco ad alta resistenza al calore, con supporto per il fissaggio dei reattori. Fornita completa di portalamпада E27.

DARIA

E27	M28.000.E27
8W LED	M28.000.M1R
12W LED	M28.000.N1R

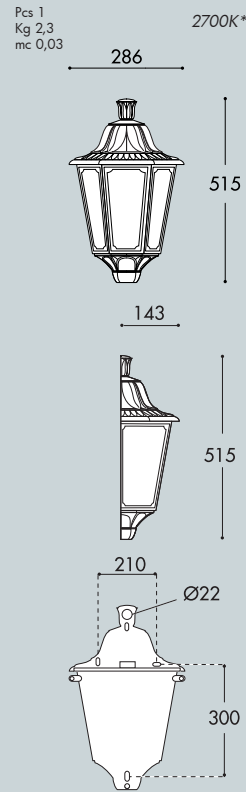

DARIA

M28.000 *



Dimensions and weight

Height: 515 mm
Width: 286 mm
Depth: 143 mm
Weight: 2,3 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES .F1L(6W) .M1L (8W) .N1L (12W)

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



Suitable lamps: CFL-LED SON-HQI MAX 70W		E27 lampholder only		.E27
	8 W	1000 Lm	4000 K	.M1L
			2700 K	.M1R
	12 W	1500 Lm	4000 K	.N1L
			2700 K	.N1R




Technical details on page 552.

- PERFECT MATCHING WITH CLASSIC LANTERNS:** clear LED filament lamp with the look and the feeling of a traditional incandescent bulb.
- SUITABLE FOR OUTDOOR USE:** 100-240 V built-in driver fully protected against heat and humidity by silicone paste.
- OMNIDIRECTIONAL LIGHT:** 360° light output for a better lighting distribution on hexagonal and square classic lanterns.
- HIGH EFFICIENCY:** 90% energy saving.

6W
8W
12W = 60W
75W
100W incandescent

SAVE 90%

PHOTOMETRIC DATA SAMPLE

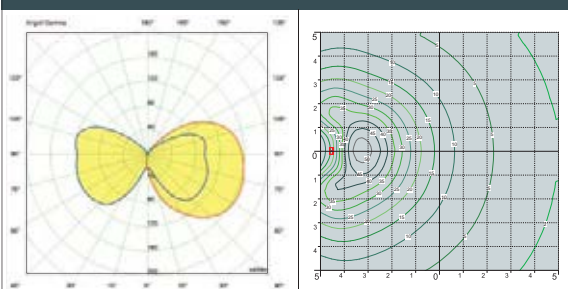

DARIA lantern clear with Fumagalli Filament Led Lamp 12W.

height wall mounting: 2,5mt
10x10mt area: average 8 lux

The photometric data for all the versions are available upon request or on our website.

*ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 250 CLASSIC

SMALL SIZE



Ø 250 mm PMMA globe, complete with classic globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

Globo Ø 250 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito anche completo di lampadine LED a filamento adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



G25.131

E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



GLOBE 250 CLASSIC - COMPONENTS

IP55



Ø 250 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

***GLOBO** Ø 250 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

Clear (X)

Opal (Y)

Smoked (Z)



GLOBE BASE with classic design, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

***REGGIBOCCIA** con disegno classico realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampada E27.*

GLOBE 250 CLASSIC

G25.B25 *



Dimensions and weight

Height: 260 mm
Diameter: 250 mm
Weight: 0,8 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal Smoked

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		.E27	
6 W	800 Lm	4000 K	.F1L	8 W	1000 Lm
		2700 K	.F1R		
12 W	1500 Lm	4000 K	.N1L	8 W	1000 Lm
		2700 K	.N1R		



LED LAMPS





Technical details on page 552.

Globe supplied with E27 base. Provided as an option with TÜV-CB certified, long-life and efficient **LED filament lamps suitable for outdoor use** with built-in driver fully protected against heat and humidity by silicone paste.

6W 8W 12W = 60W 75W 100W incandescent

SAVE 90%

PHOTOMETRIC DATA SAMPLE



GLOBE 250 CLASSIC clear with Fumagalli Filament Led Lamp 6W.

POST height 1mt
6x6mt area: average 4 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 250 CLASSIC

SMALL SIZE



G25.156.F1R



G25.162.F1R



G25.131.F1R




G25.110.F1R



G25.141.F1R





MIKROLOT/G250	
E27	G25.110.E27
6W LED	G25.110.F1R
8W LED	G25.110.M1R
12W LED	G25.110.N1R
Pcs 36 Kg 42 mc 0,829	
2700K*	

BISSO/G250	
E27	G25.131.E27
6W LED	G25.131.F1R
8W LED	G25.131.M1R
12W LED	G25.131.N1R
Pcs 36 Kg 42 mc 0,829	
2700K*	

PORPORA/G250	
E27	G25.141.E27
6W LED	G25.141.F1R
8W LED	G25.141.M1R
12W LED	G25.141.N1R
Pcs 1 Kg 4 mc 0,028	
2700K*	

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES .F1L(6W) .M1L (8W) .N1L (12W)

GLOBE 250 CLASSIC	
G25.B25	
Pcs 2 Kg 1,6 mc 0,025	
2700K*	

MIZAR/G250 resin	
E27	G25.151.E27
6W LED	G25.151.F1R
8W LED	G25.151.M1R
12W LED	G25.151.N1R
Pcs 2 Kg 4 mc 0,078	
2700K*	

IAFET.R/G250 resin	
E27	G25.162.E27
6W LED	G25.162.F1R
8W LED	G25.162.M1R
12W LED	G25.162.N1R
Pcs 2 Kg 6,9 mc 0,092	
2700K*	

SICHEM/G250	
E27	G25.120.E27
6W LED	G25.120.F1R
8W LED	G25.120.M1R
12W LED	G25.120.N1R
Pcs 36 Kg 42 mc 0,829	
2700K*	

GIGI BISSO/G250 3L	
E27	G25.156.S30.E27
6W LED	G25.156.S30.F1R
8W LED	G25.156.S30.M1R
12W LED	G25.156.S30.N1R
Pcs 2 Kg 25,4 mc 0,31	
2700K*	

RICU BISSO/G250 3L	
E27	G25.157.S30.E27
6W LED	G25.157.S30.F1R
8W LED	G25.157.S30.M1R
12W LED	G25.157.S30.N1R
Pcs 2 Kg 27,5 mc 0,339	
2700K*	

ALOE'R/G250 resin	
E27	G25.163.E27
6W LED	G25.163.F1R
8W LED	G25.163.M1R
12W LED	G25.163.N1R
Pcs 2 Kg 7 mc 0,122	
2700K*	

ARTU'/G250	
E27	G25.158.E27
6W LED	G25.158.F1R
8W LED	G25.158.M1R
12W LED	G25.158.N1R
Pcs 2 Kg 17,1 mc 0,186	
2700K*	

GIGI/G250	
E27	G25.156.E27
6W LED	G25.156.F1R
8W LED	G25.156.M1R
12W LED	G25.156.N1R
Pcs 2 Kg 20,1 mc 0,217	
2700K*	

GIGI BISSO/G250 2L	
E27	G25.156.S20.E27
6W LED	G25.156.S20.F1R
8W LED	G25.156.S20.M1R
12W LED	G25.156.S20.N1R
Pcs 2 Kg 23,7 mc 0,27	
2700K*	

RICU BISSO/G250 2L	
E27	G25.157.S20.E27
6W LED	G25.157.S20.F1R
8W LED	G25.157.S20.M1R
12W LED	G25.157.S20.N1R
Pcs 2 Kg 24,8 mc 0,304	
2700K*	

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 300 CLASSIC

MEDIUM SIZE



Ø 300 mm PMMA globe, complete with classic globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

*Globo Ø 300 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito anche completo di **lampadine LED a filamento** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



G30.162



G30.111

E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



GLOBE 300 CLASSIC - COMPONENTS

IP55



Ø 300 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

***GLOBO** Ø 300 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

Clear (X) Opal (Y) Smoked (Z)



GLOBE BASE with classic design, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

***REGGIBOCCIA** con disegno classico realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampana E27.*

GLOBE 300 CLASSIC

G30.B30 *



Dimensions and weight

Height: 310 mm
Diameter: 300 mm
Weight: 1,1 Kg

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal Smoked

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		.E27
6 W	800 Lm	4000 K	.F1L	
		2700 K	.F1R	
8 W	1000 Lm	4000 K	.M1L	
		2700 K	.M1R	
12 W	1500 Lm	4000 K	.N1L	
		2700 K	.N1R	



LED LAMPS





Technical details on page 552.

Globe supplied with E27 base. Provided as an option with TÜV-CB certified, long-life and efficient **LED filament lamps suitable for outdoor use** with built-in driver fully protected against heat and humidity by silicone paste.

6W
8W
12W = 60W
75W
100W incandescent

SAVE 90%

PHOTOMETRIC DATA SAMPLE



GLOBE 300 CLASSIC clear with Fumagalli Filament Led Lamp 8W.

POST height 2mt
6x6mt area: average 3,5 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GLOBE 300 CLASSIC

MEDIUM SIZE



G30.157.S20.M1R



G30.131.M1R



G30.111.M1R



G30.120.M1R

MADE IN ITALY

RICU BISSO/G300 2L	
E27	G30.157.S20.E27
6W LED	G30.157.S20.F1R
8W LED	G30.157.S20.M1R
12W LED	G30.157.S20.N1R
Pcs 2 Kg 29,4 mc 0,366	2700K*

RICU BISSO/G300 3L	
E27	G30.157.S30.E27
6W LED	G30.157.S30.F1R
8W LED	G30.157.S30.M1R
12W LED	G30.157.S30.N1R
Pcs 2 Kg 31,8 mc 0,401	2700K*

BISSO/G300	
E27	G30.131.E27
6W LED	G30.131.F1R
8W LED	G30.131.M1R
12W LED	G30.131.N1R
Pcs 24 Kg 44,2 mc 0,638	2700K*

SICHEM/G300	
E27	G30.120.E27
6W LED	G30.120.F1R
8W LED	G30.120.M1R
12W LED	G30.120.N1R
Pcs 24 Kg 44,2 mc 0,638	2700K*

GLOBE 300 CLASSIC	
G30.B30	
Pcs 2 Kg 2,2 mc 0,059	

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES .F1L(6W) .M1L (8W) .N1L (12W)

RICU/G300	
E27	G30.157.E27
6W LED	G30.157.F1R
8W LED	G30.157.M1R
12W LED	G30.157.N1R
Pcs 2 Kg 22,2 mc 0,274	2700K*

GIGI/G300	
E27	G30.156.E27
6W LED	G30.156.F1R
8W LED	G30.156.M1R
12W LED	G30.156.N1R
Pcs 2 Kg 20,7 mc 0,242	2700K*

ARTU'/G300	
E27	G30.158.E27
6W LED	G30.158.F1R
8W LED	G30.158.M1R
12W LED	G30.158.N1R
Pcs 2 Kg 17,7 mc 0,211	2700K*

ALOE'.R/G300	
E27	G30.163.E27
6W LED	G30.163.F1R
8W LED	G30.163.M1R
12W LED	G30.163.N1R
Pcs 2 Kg 8,2 mc 0,146	2700K*

MINILOT/G300	
E27	G30.111.E27
6W LED	G30.111.F1R
8W LED	G30.111.M1R
12W LED	G30.111.N1R
Pcs 24 Kg 44,2 mc 0,638	2700K*

IAFET.R/G300 resin	
E27	G30.162.E27
6W LED	G30.162.F1R
8W LED	G30.162.M1R
12W LED	G30.162.N1R
Pcs 2 Kg 7,5 mc 0,117	2700K*

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GLOBE 300 CLASSIC

MEDIUM SIZE



G30.201.R20



G30.132.M1R



G30.201.R30.M1R



G30.201.M1R





RICU OFIR/G300 3L	
E27	G30.157.R30.E27
6W LED	G30.157.R30.F1R
8W LED	G30.157.R30.M1R
12W LED	G30.157.R30.N1R
Pcs 2 Kg 29,9 mc 0,439	2700K*

MIRRA/G300	
E27	G30.142.E27
6W LED	G30.142.F1R
8W LED	G30.142.M1R
12W LED	G30.142.N1R
Pcs 1 Kg 5,1 mc 0,077	2700K*

OFIR/G300	
E27	G30.132.E27
6W LED	G30.132.F1R
8W LED	G30.132.M1R
12W LED	G30.132.N1R
Pcs 2 Kg 4,6 mc 0,077	2700K*

*TO ORDER THE 4000K VERSION, USE THE SUFFIXES .F1L(6W) .M1L (8W) .N1L (12W)

RICU OFIR/G300 2L	
E27	G30.157.R20.E27
6W LED	G30.157.R20.F1R
8W LED	G30.157.R20.M1R
12W LED	G30.157.R20.N1R
Pcs 2 Kg 26,3 mc 0,379	2700K*

NEBO/G300	
E27	G30.201.E27
6W LED	G30.201.F1R
8W LED	G30.201.M1R
12W LED	G30.201.N1R
Pcs 1 Kg 22,2 mc 0,163	2700K*

NEBO OFIR/G300 2L	
E27	G30.201.R20.E27
6W LED	G30.201.R20.F1R
8W LED	G30.201.R20.M1R
12W LED	G30.201.R20.N1R
Pcs 1 Kg 25,7 mc 0,208	2700K*

NEBO OFIR/G300 3L	
E27	G30.201.R30.E27
6W LED	G30.201.R30.F1R
8W LED	G30.201.R30.M1R
12W LED	G30.201.R30.N1R
Pcs 1 Kg 30,8 mc 0,237	2700K*

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 300 MODERN

MEDIUM SIZE



Ø 300 mm PMMA globe, complete with modern globe base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use. Insulation class II, protection rating IP 55.

G31.262

Globo Ø 300 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito anche completo di lampadine LED a filamento adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.



E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY


VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500

CE	UV UV-TREATED	CLASS II DOUBLE INSULATION	RESIDENTIAL
RECYCLABLE	ANTI-SHOCK	TEMPERATURE +90° -60°	WALL POST






GLOBE 300 MODERN - COMPONENTS

IP55



Ø 300 mm **GLOBE** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

***GLOBO** Ø 300 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

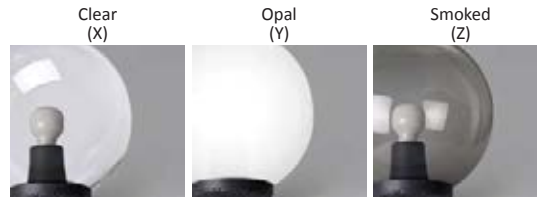

GLOBE BASE with modern design made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied complete with E27 lampholder.

REGGIBOCCIA con disegno moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito completo di portalampana E27.

GLOBE 300 MODERN

G31.B30 *



Dimensions and weight

Height: 310 mm
Diameter: 300 mm
Weight: 1,1 Kg

Moulded colours:

Black White

Diffuser PMMA:

Clear Opal Smoked

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 (CFL-LED)		max 160 mm		.E27
6 W	800 Lm	4000 K	.F1L	
		2700 K	.F1R	
8 W	1000 Lm	4000 K	.M1L	
		2700 K	.M1R	
12 W	1500 Lm	4000 K	.N1L	
		2700 K	.N1R	



LED LAMPS




Technical details on page 552.

Globe supplied with E27 base. Provided as an option with TÜV-CB certified, long-life and efficient **LED filament lamps suitable for outdoor use** with built-in driver fully protected against heat and humidity by silicone paste.

6W
8W
12W = 60W
75W
100W incandescent

SAVE 90%

PHOTOMETRIC DATA SAMPLE

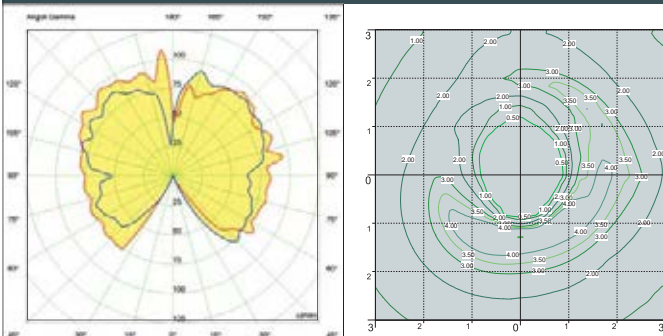

GLOBE 300 MODERN clear with Fumagalli Filament Led Lamp 6W.

POST height 2mt
6x6mt area: average 2,5 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GLOBE 300 MODERN

MEDIUM SIZE



G31.265



G31.251



G31.251



G31.280




G31.265.L20



G31.241



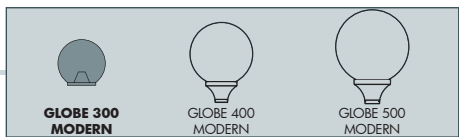

ILIO/GLOBE 300
G31.251

Pcs 2
Kg 5,7
mc 0,1144

ARGO/G300
G31.241 resin

Pcs 4
Kg 6,7
mc 0,148

FEBO 500/G300
G31.261 resin

Pcs 2
Kg 6
mc 0,117

FEBO 1000/G300
G31.262 resin

Pcs 2
Kg 7,2
mc 0,146

ELISSA 1400/ G300	ELISSA 1900/ G300
G31.280	G31.281
Pcs 2 Kg 9,2 mc 0,200	Pcs 2 Kg 15,9 mc 0,232

FEBO 1500/G300
G31.263

Pcs 2
Kg 13,9
mc 0,178

ORIONE 2450/ G300	ORIONE 2850/ G300
G31.284	G31.285
Pcs 2 Kg 24,7 mc 0,225	Pcs 2 Kg 28,4 mc 0,246

ENE 2000/ G 300	ENE 2400/ G 300
G31.264	G31.265
Pcs 2 Kg 22,7 mc 0,171	Pcs 2 Kg 26,4 mc 0,192

ENE 2000 ELI/G300 3L	ENE 2400 ELI/G300 3L
G31.264.L30	G31.265.L30
Pcs 2 Kg 36,7 mc 0,400	Pcs 2 Kg 40,4 mc 0,421

ENE 2000 ELI/ G300 2L	ENE 2400 ELI/ G300 2L
G31.264.L20	G31.265.L20
Pcs 2 Kg 33,1 mc 0,340	Pcs 2 Kg 36,8 mc 0,361

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES



URBAN CLASSIC

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

NOEMI HIGH POWER LED

LARGE SIZE



Hexagonal lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna esagonale realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500

E35.121.Q1L



RECYCLABLE	ANTI-SHOCK	TEMPERATURE		WALL	POST	HANGING



NOEMI HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

NOEMI HIGH POWER LED

E35.000 *



Dimensions and weight

Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,9 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,110

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

HIGH POWER LED





- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

*ADD. SUFFIX

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.



		15 W	1800 Lm	4000 K	.R1L
E27				3000 K	.R1R
		30 W	3500 Lm	4000 K	.Q1L
E27				3000 K	.Q1R
		50 W	5300 Lm	4000 K	.H1L
				3000 K	.H1R

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE



SAVE -65%

HIGH POWER LED 30W
(power consumption)

Area: 10x10mt
Height: 3mt
15 lux

SON 70W
power consumption = 84W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

NOEMI E27

LARGE SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.

E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500

E35.000.N1R





NOEMI E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e idoneo per il fissaggio dei reattori.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

NOEMI E27

E35.000 *



Dimensions and weight

Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,2 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,110

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 lantern supplied as an option with TÜV-CB certified, long-life and efficient LED filament lamps suitable for outdoor use.

Suitable lamps: CFL-LED SON-HQI MAX 70W		E27 lampholder only		.E27
8 W	1000 Lm	4000 K	.M1L	.M1R
		2700 K		
12 W	1500 Lm	4000 K	.N1L	.N1R
		2700 K		




LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE

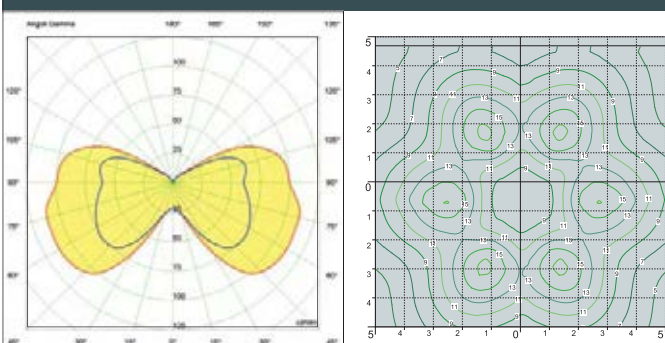

NOEMI lantern clear SON 70W.

POST height 3mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

NOEMI

LARGE SIZE



E35.157.Q1L



E35.132.Q1L



E35.121.Q1L



E35.132.Q1L



E35.113.R1L



E35.162.R1R





OFIR/NOEMI
E35.132

Pcs 1
Kg 4,6
mc 0,048

EVA/NOEMI
E35.181

Pcs 1
Kg 10,9
mc 0,168

NOEMI
E35.000

Pcs 1
Kg 3,9
mc 0,043

LOT/NOEMI
E35.113

Pcs 1
Kg 4,8
mc 0,061

MIRRA/NOEMI
E35.142

Pcs 1
Kg 9,5
mc 0,083

SICHEM/NOEMI
E35.121

Pcs 1
Kg 4,4
mc 0,048

RICU/NOEMI
E35.157

Pcs 2
Kg 27,8
mc 0,310

GIGI/NOEMI
E35.156

Pcs 2
Kg 26,3
mc 0,278

ARTU'/NOEMI
E35.158

Pcs 2
Kg 23,3
mc 0,247

ALOE'.R/NOEMI
E35.163 resin

Pcs 2
Kg 12,8
mc 0,182

IAFET.R/NOEMI
E35.162 resin

Pcs 2
Kg 13,1
mc 0,153

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

NEBO/NOEMI

LARGE SIZE



E35.201.R20.Q1L



E35.201.R20.Q1L



E35.201.Q1R





NEBO OFIR/NOEMI 2L
E35.201.R20

Pcs 1
Kg 31,9
mc 0,268

NEBO OFIR/NOEMI 3L
E35.201.R30

Pcs 1
Kg 35,8
mc 0,342

NEBO/NOEMI
E35.201

Pcs 1
Kg 24,9
mc 0,196

Ø 275

NEBO OFIR/NOEMI 2L
E35.201.R20

Pcs 1
Kg 31,9
mc 0,268

Ø 275

NEBO OFIR/NOEMI 3L
E35.201.R30

Pcs 1
Kg 35,8
mc 0,342

Ø 275

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

TABOR/NOEMI

LARGE SIZE



E35.204.R20.Q1L



E35.204.R30.Q1L



E35.204.Q1L





TABOR OFIR/NOEMI 2L
E35.204.R20

Pcs 1
Kg 36,4
mc 0,295

TABOR OFIR/NOEMI 3L
E35.204.R30

Pcs 1
Kg 39,5
mc 0,369

TABOR/NOEMI
E35.204

Pcs 1
Kg 29,4
mc 0,223

Ø 275

TABOR OFIR/NOEMI 2L
E35.204.R20

Pcs 1
Kg 36,4
mc 0,295

Ø 275

TABOR OFIR/NOEMI 3L
E35.204.R30


Pcs 1
Kg 39,5
mc 0,369

Ø 275

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

HOREB/NOEMI

LARGE SIZE

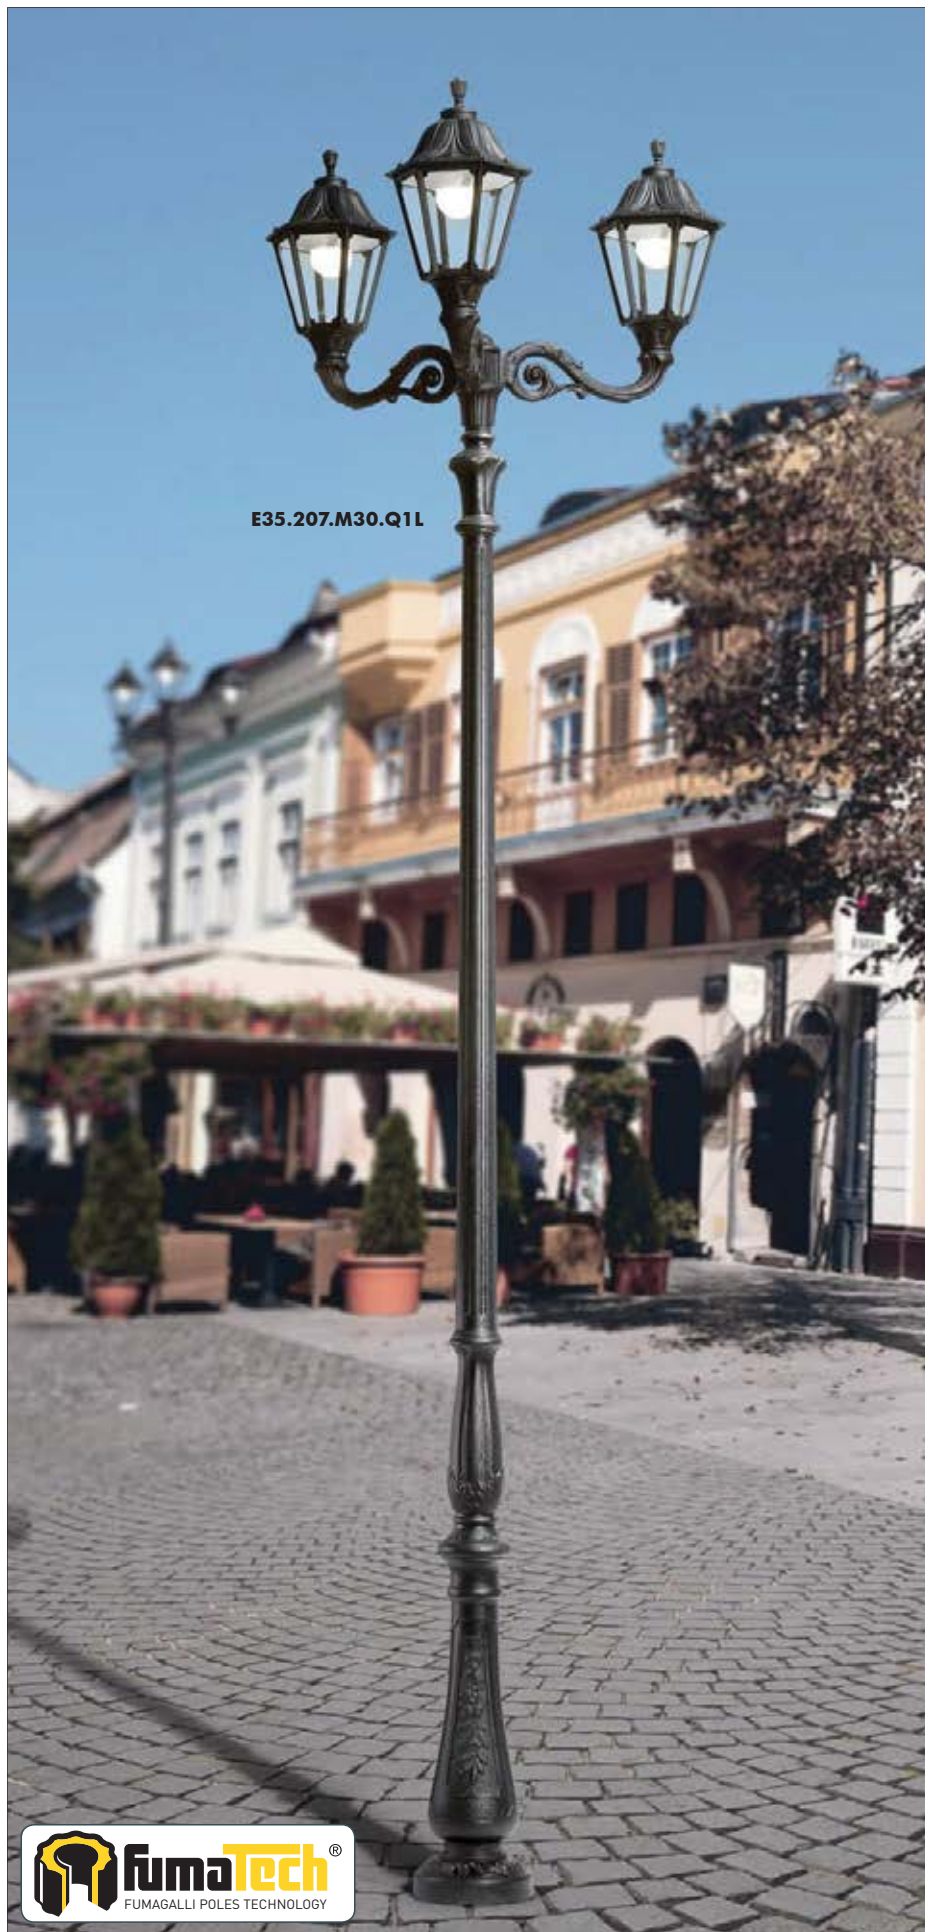

E35.207.M30.Q1L



E35.171.Q1L



E35.207.M21.Q1L



MADE IN ITALY



HOREB ADAM/NOEMI 1L
E35.207.M10

Pcs 1
Kg 33,8
mc 0,280

ADAM/NOEMI
E35.171

Pcs 1
Kg 5,3
mc 0,083

HOREB ADAM/NOEMI 3+1
E35.207.M31

Pcs 1
Kg 48
mc 0,476

HOREB/NOEMI
E35.207

Pcs 1
Kg 31,9
mc 0,249

HOREB ADAM/NOEMI 2+1
E35.207.M21

Pcs 1
Kg 43
mc 0,404

HOREB ADAM/NOEMI 3L
E35.207.M30

Pcs 1
Kg 44,1
mc 0,414

HOREB ADAM/NOEMI 2L
E35.207.M20

Pcs 1
Kg 38,8
mc 0,342

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

KARMELO 3000/NOEMI

LARGE SIZE



E35.231.R20.Q1L



E35.231.R30.Q1L



E35.231.Q1L



MADE IN ITALY



KARMEI 3000 OFIR/NOEMI 2L
E35.231.R20

Pcs 1
Kg 36,4
mc 0,295

KARMEI 3000 OFIR/NOEMI 3L
E35.231.R30

Pcs 1
Kg 39,5
mc 0,369

KARMEI 3000/NOEMI
E35.231

Pcs 1
Kg 29,4
mc 0,223

KARMEI 3000 OFIR/NOEMI 2L
E35.231.R20

Pcs 1
Kg 36,4
mc 0,295

KARMEI 3000 OFIR/NOEMI 3L
E35.231.R30

Pcs 1
Kg 39,5
mc 0,369

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

KARMEL 3500-4000/NOEMI

LARGE SIZE



E35.234.M21.Q1L



E35.171.Q1L



E35.234.Q1L



MADE IN ITALY



KARMEL 3500 ADAM/NOEMI 1L	KARMEL 4000 ADAM/NOEMI 1L
E35.234.M10	E35.237.M10
Pcs 1 Kg 33,8 mc 0,280	Pcs 1 Kg 36,3 mc 0,287

KARMEL 3500/NOEMI
E35.234
Pcs 1 Kg 31,9 mc 0,249

Ø 275

KARMEL 3500 ADAM/NOEMI 2+1	KARMEL 4000 ADAM/NOEMI 2+1
E35.234.M21	E35.237.M21
Pcs 1 Kg 43 mc 0,404	Pcs 1 Kg 45,5 mc 0,431

Ø 275

KARMEL 3500 ADAM/NOEMI 3L	KARMEL 4000 ADAM/NOEMI 3L
E35.234.M30	E35.237.M30
Pcs 1 Kg 44,1 mc 0,414	Pcs 1 Kg 46,6 mc 0,441

KARMEL 3500 ADAM/NOEMI 3+1	KARMEL 4000 ADAM/NOEMI 3+1
E35.234.M31	E35.237.M31
Pcs 1 Kg 48 mc 0,476	Pcs 1 Kg 50,5 mc 0,503

KARMEL 3500 ADAM/NOEMI 2L	KARMEL 4000 ADAM/NOEMI 2L
E35.234.M20	E35.237.M20
Pcs 1 Kg 38,8 mc 0,342	Pcs 1 Kg 41,3 mc 0,369

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES


SILOE HIGH POWER LED

LARGE SIZE



Hexagonal lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient E27 high power LED lamp included. Insulation class II, Protection rating IP55.

Lantern a esagonale realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita completa di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55

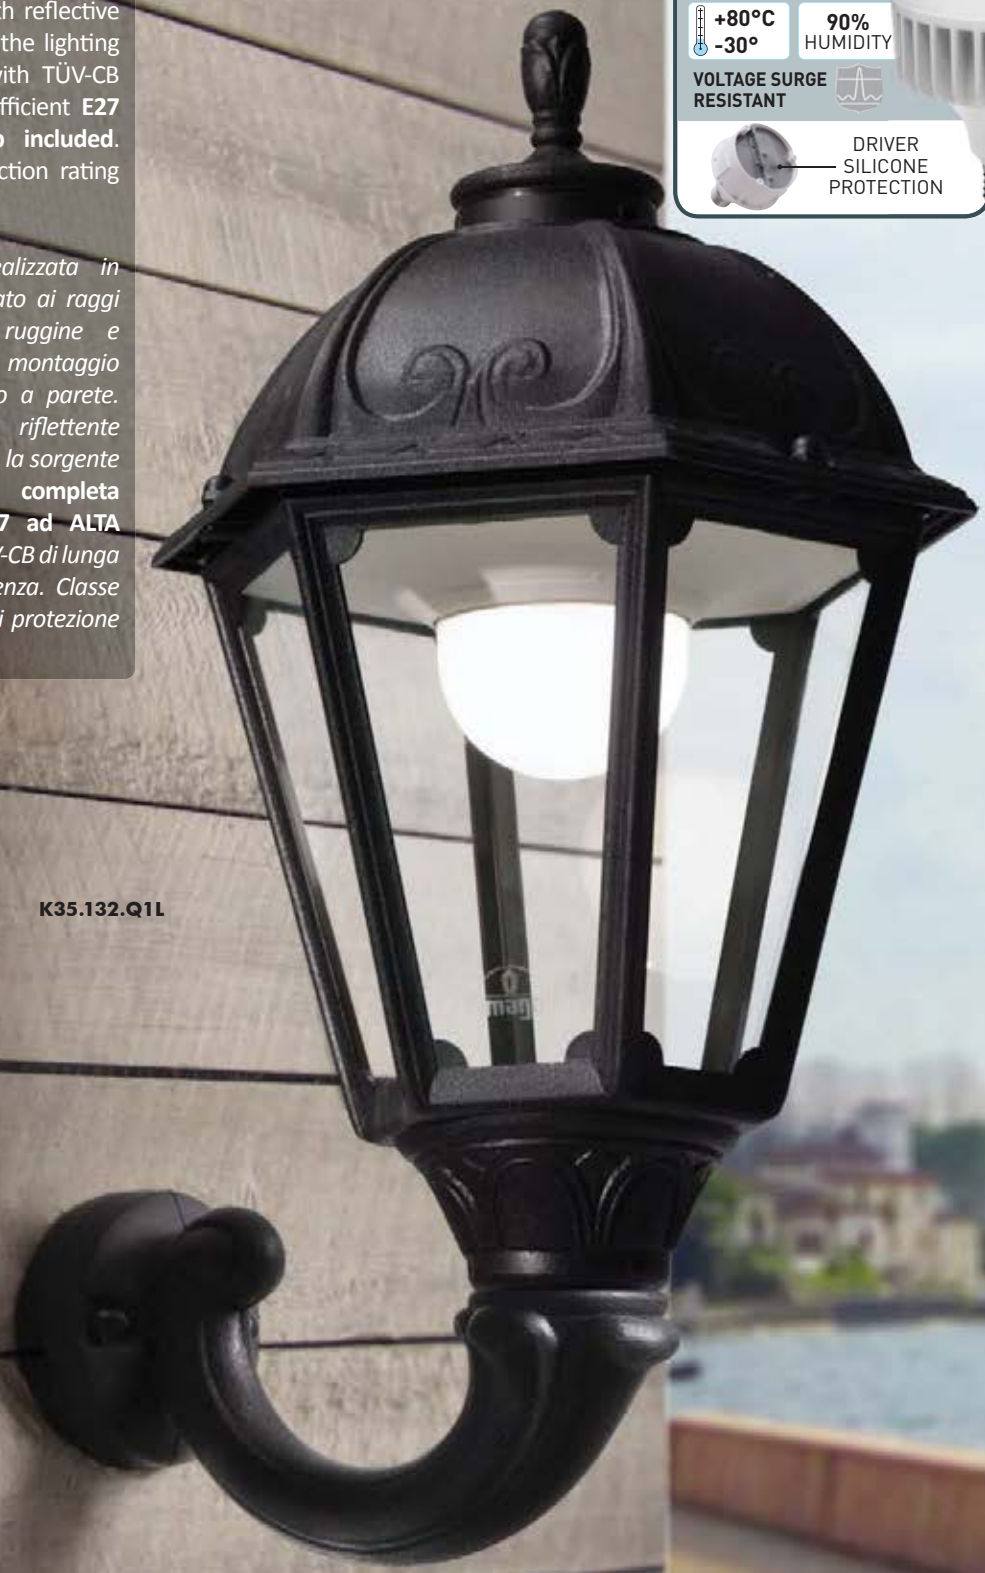

K35.132.Q1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500



SILOE HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SILOE HIGH POWER LED

K35.000 *



Dimensions and weight

Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,9 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,113

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

*ADD.SUFFIX

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.




	15 W	1800 Lm	4000 K	.R1L
E27 			3000 K	.R1R
	30 W	3500 Lm	4000 K	.Q1L
E27 			3000 K	.Q1R
	50 W	5300 Lm	4000 K	.H1L
			3000 K	.H1R

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE



SAVE -65%

HIGH POWER LED 30W
(power consumption)

Area: 10x10mt
Height: 3mt
15 lux



SON 70W
power consumption = 84W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SILOE E27

LARGE SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.

E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500



K35.000.N1R





SILOE E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e idoneo per il fissaggio dei reattori.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SILOE E27

K35.000 *



Dimensions and weight

Height: 530 mm
Width: 350 mm
Depth: 305 mm
Weight: 3,2 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,113

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal


E27 VERSIONS

100 - 240 V

*ADD. SUFFIX



E27 lantern supplied as an option with TÜV-CB certified, long-life and efficient **LED filament lamps** suitable for outdoor use.



Suitable lamps: CFL-LED SON-HQI MAX 70W		E27 lampholder only		.E27
	8 W	1000 Lm	4000 K	.M1L
			2700 K	.M1R
	12 W	1500 Lm	4000 K	.N1L
			2700 K	.N1R

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE



SILOE lantern clear SON 70W.

POST height 3mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SILOE

LARGE SIZE





OFIR/SILOE
K35.132

Pcs 1
Kg 4,6
mc 0,048

EVA/SILOE
K35.181

Pcs 1
Kg 10,9
mc 0,168

SILOE
K35.000

Pcs 1
Kg 3,9
mc 0,043

LOT/SILOE
K35.113

Pcs 1
Kg 4,8
mc 0,061

MIRRA/SILOE
K35.142

Pcs 1
Kg 9,5
mc 0,083

SICHEM/SILOE
K35.121

Pcs 1
Kg 4,4
mc 0,048

RICU/SILOE
K35.157

Pcs 2
Kg 27,8
mc 0,310

GIGI/SILOE
K35.156

Pcs 2
Kg 26,3
mc 0,278

ARTU'/SILOE
K35.158

Pcs 2
Kg 23,3
mc 0,247

ALOE'.R/SILOE
K35.163 resin

Pcs 2
Kg 12,8
mc 0,182

IAFET.R/SILOE
K35.162 resin

Pcs 2
Kg 13,1
mc 0,153

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

NEBO/SILOE

LARGE SIZE








K35.201.R20.Q1L



K35.201.Q1L



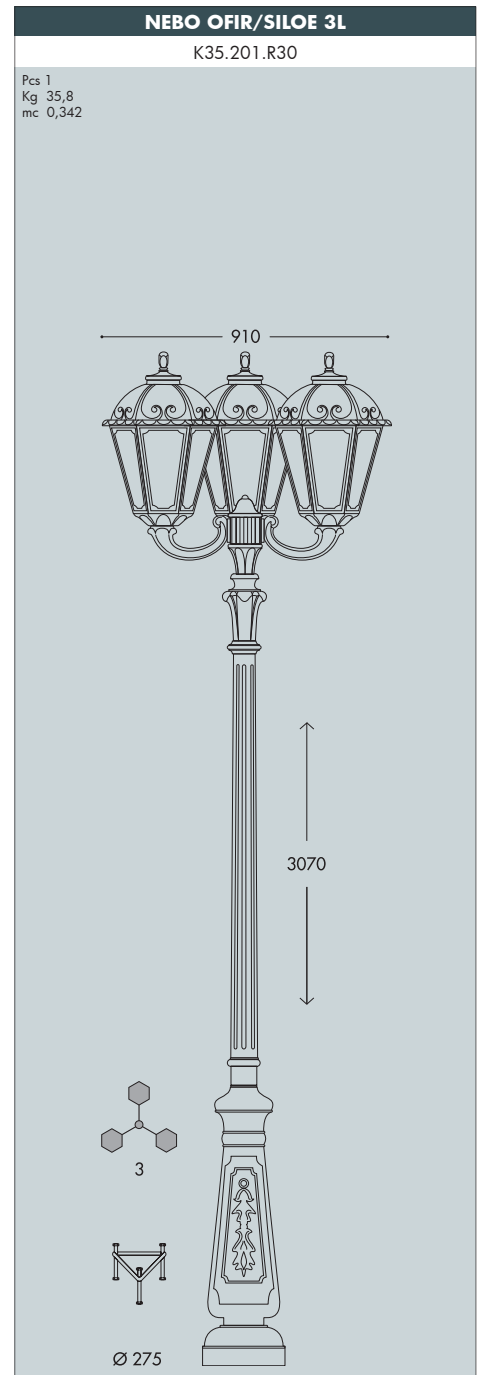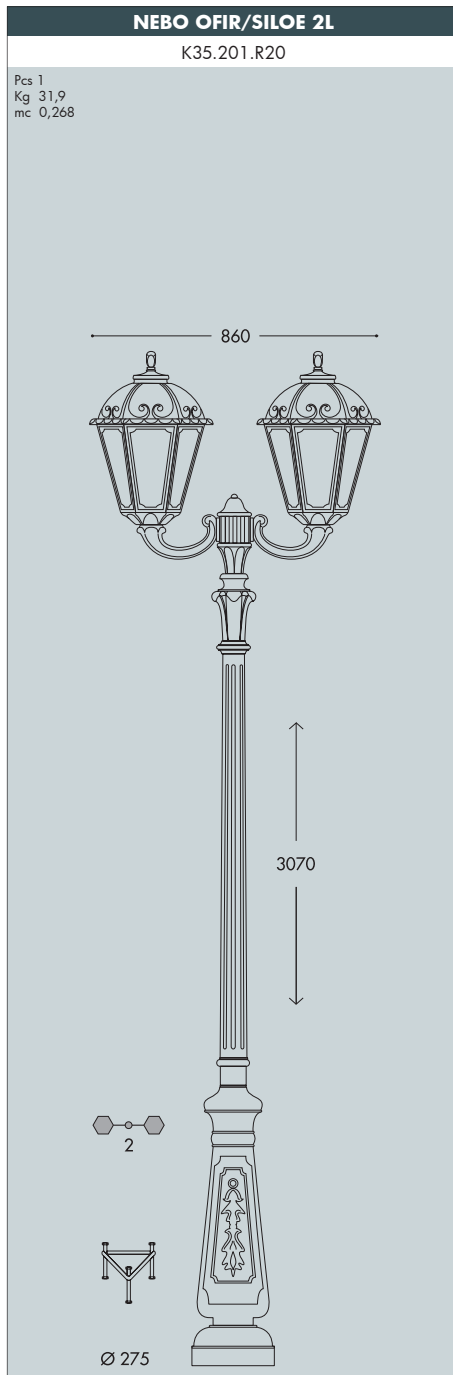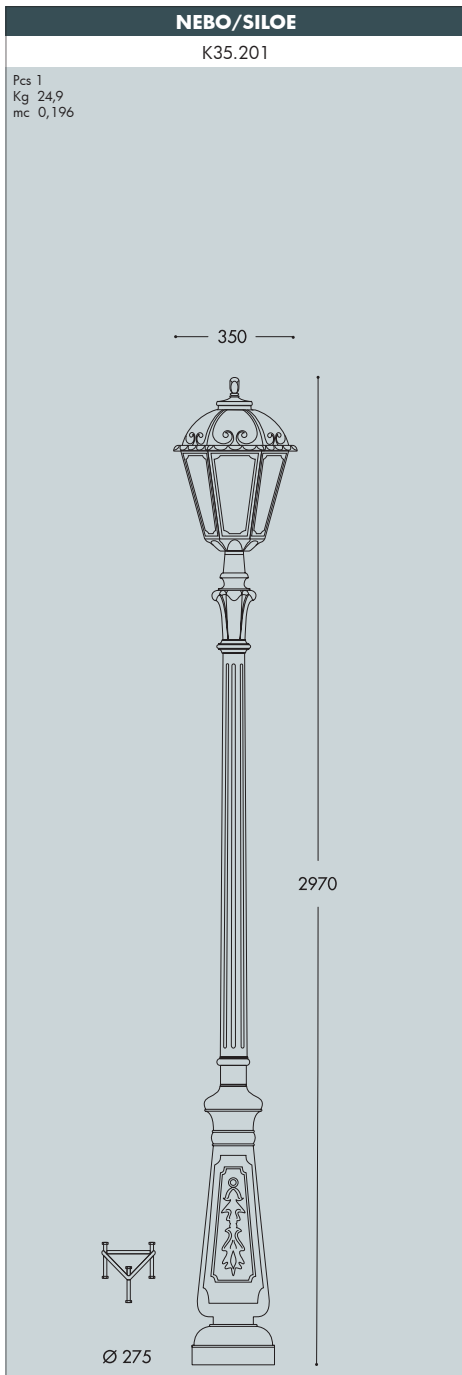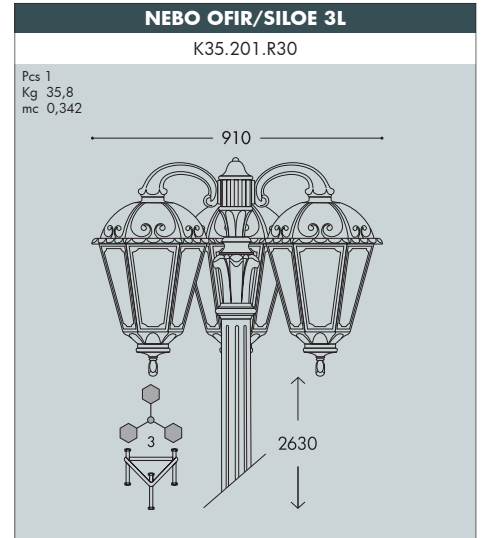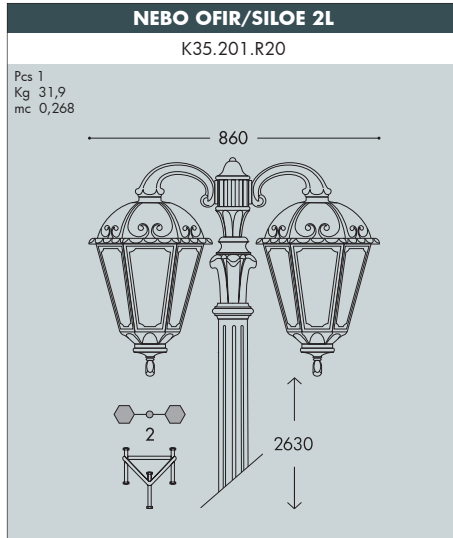

TABOR/SILOE

LARGE SIZE



K35.204.R20.Q1L



K35.204.R20.Q1L



K35.204.Q1L



MADE IN ITALY



TABOR OFIR/SILOE 2L
K35.204.R20

Pcs 1
Kg 36,4
mc 0,295

TABOR OFIR/SILOE 3L
K35.204.R30

Pcs 1
Kg 39,5
mc 0,369

TABOR/SILOE
K35.204

Pcs 1
Kg 29,4
mc 0,223

TABOR OFIR/SILOE 2L
K35.204.R20

Pcs 1
Kg 36,4
mc 0,295

TABOR OFIR/SILOE 3L
K35.204.R30

Pcs 1
Kg 39,5
mc 0,369

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

HOREB/SILOE

LARGE SIZE



K35 .207.M21.Q1L



K35.171.Q1L



K35 .207.Q1L





HOREB ADAM/SILOE 1L
K35.207.M10

Pcs 1
Kg 33,8
mc 0,280

720

3630

ADAM/SILOE
K35.171

Pcs 1
Kg 5,3
mc 0,083

610

700

610

HOREB ADAM/SILOE 3+1
K35.207.M31

Pcs 1
Kg 48
mc 0,476

1230

4180

3+1

HOREB/SILOE
K35.207

Pcs 1
Kg 31,9
mc 0,249

350

3970

Ø 275

HOREB ADAM/SILOE 3L
K35.207.M30

Pcs 1
Kg 43
mc 0,414

1230

4120

Ø 275

3

HOREB ADAM/SILOE 2+1
K35.207.M21

Pcs 1
Kg 44,1
mc 0,404

1240

4180

2+1

HOREB ADAM/SILOE 2L
K35.207.M20

Pcs 1
Kg 38,8
mc 0,342

1240

4120

2

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

KARMEL 3000/SILOE

LARGE SIZE



K35.231.R30.Q1L



K35.231.R20.Q1L



K35.231.Q1L





KARMEL 3000 OFIR/SILOE 2L
K35.231.R20

Pcs 1
Kg 36,4
mc 0,295

KARMEL 3000 OFIR/SILOE 3L
K35.231.R30

Pcs 1
Kg 39,5
mc 0,369

KARMEL 3000/SILOE
K35.231

Pcs 1
Kg 29,4
mc 0,223

Ø 275

KARMEL 3000 OFIR/SILOE 2L
K35.231.R20

Pcs 1
Kg 36,4
mc 0,295

Ø 275

KARMEL 3000 OFIR/SILOE 3L
K35.231.R30

Pcs 1
Kg 39,5
mc 0,369

Ø 275

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

KARMEL 3500-4000/SILOE

LARGE SIZE



K35.234.M30.Q1L



K35.171.Q1L



K35 .234.Q1L

MADE IN ITALY



KARMEL 3500 ADAM/SILOE 1L	KARMEL 4000 ADAM/SILOE 1L
K35.234.M10	K35.237.M10
Pcs 1 Kg 33,8 mc 0,280	Pcs 1 Kg 36,3 mc 0,287
720	

KARMEL 3500 ADAM/SILOE 2+1	KARMEL 4000 ADAM/SILOE 2+1
K35.234.M21	K35.237.M21
Pcs 1 Kg 43 mc 0,404	Pcs 1 Kg 45,5 mc 0,431
1240	

KARMEL 3500 ADAM/SILOE 3L	KARMEL 4000 ADAM/SILOE 3L
K35.234.M30	K35.237.M30
Pcs 1 Kg 44,1 mc 0,414	Pcs 1 Kg 46,6 mc 0,441
1230	

KARMEL 3500/SILOE
K35.234
Pcs 1 Kg 31,9 mc 0,249
350

KARMEL 3500 ADAM/SILOE 3+1	KARMEL 4000 ADAM/SILOE 3+1
K35.234.M31	K35.237.M31
Pcs 1 Kg 48 mc 0,476	Pcs 1 Kg 50,5 mc 0,503
1230	

KARMEL 3500 ADAM/SILOE 2L	KARMEL 4000 ADAM/SILOE 2L
K35.234.M20	K35.237.M20
Pcs 1 Kg 38,8 mc 0,342	Pcs 1 Kg 41,3 mc 0,369
1240	

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

TOBIA HIGH POWER LED

LARGE SIZE



Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna quadra realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



Q33.000.Q1L





TOBIA HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

TOBIA HIGH POWER LED

Q33.000 *



Dimensions and weight

Height: 520 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure: CxS = m² 0,089

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V

*ADD.SUFFIX



		15 W	30 W	50 W	4000 K	3000 K
E27		1800 Lm	3500 Lm	5300 Lm	.R1L	.R1R
					.Q1L	.Q1R
E27					.H1L	.H1R

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE



SAVE -65%

HIGH POWER LED 30W
(power consumption)

Area: 10x10mt
Height: 3.5mt
15 lux

SON 70W
power consumption = 84W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

TOBIA E27

LARGE SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.



Q33.000.N2R

E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500





TOBIA E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e idoneo per il fissaggio dei reattori.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

TOBIA E27

Q33.000 *



Dimensions and weight

Height: 520 mm
Width: 330 mm
Depth: 330 mm
Weight: 3,8 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,089

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27



E27 lantern supplied as an option with TÜV-CB certified, long-life and efficient **LED filament lamps suitable for outdoor use.**

100 - 240 V		*ADD. SUFFIX	
Suitable lamps: CFL-LED-SON-HQI MAX 70W	E27 lampholder only	.E27	
8W	1000 Lm	4000 K 2700 K	.M1L .M1R
12W	1500 Lm	4000 K 2700 K	.N1L .N1R

2x E27



2x E27 lantern provided as an option with TÜV certified, long-life and efficient **LED filament lamps suitable for outdoor use.** Version with daylight and motion sensor available.



100 - 240 V		*ADD. SUFFIX	
Suitable lamps: CFL-LED max 160 mm	2x E27 lampholder only	.E28	
	2x E27 + SENSOR	.ES8	
2x 8 W 16W	2000 Lm	4000 K 2700 K	.M2L .M2R
2x 12 W 24W	3000 Lm	4000 K 2700 K	.N2L .N2R

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE



TOBIA lantern clear SON 70W.

POST height 3.5mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

TOBIA GX53 LED - FLAT DIFFUSER

LARGE SIZE



Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified long-life, powerful, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 65.

*Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.*



Q35.000.D4K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM < 6

UV TREATED	DOUBLE INSULATION	+90° -60°	PUBLIC	RESIDENTIAL	ZONE 1
RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL	POST	HANGING





TOBIA GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

LANTERN ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and maintenance.

***TETTO** realizzato in resina antiurto, stabilizzata ai raggi UV. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

DIFFUSER with flat shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

***DIFFUSORE** in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

TOBIA GX53 LED

Q35.000 *



Dimensions and weight

Height: 520 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure: CxS = m² 0,089

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:


Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin CEILING provided with 4x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


		100 - 240 V		* ADD. SUFFIX	
	4x 7 W 28 W	3200 Lm	6500 K	.C4K	
			4000 K		
	4x 10 W 40 W	4800 Lm	6500 K	.D4K	
			4000 K		
			3000 K		

LED LAMPS




Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

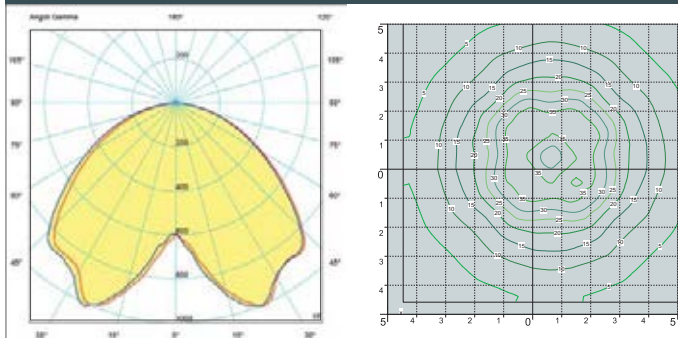

SAVE -65%

4x10W GX53 LED 40W
(power consumption)

Area: 10x10mt
Height: 4mt
22 lux

SON 100W
power consumption = 112W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

TOBIA

LARGE SIZE



Q33.157.Q1L



Q33.132.Q1L



Q33.156.Q1L



Q33.121.Q1L



Q33.113.Q1L



Q33.162.Q1L





OFIR/TOBIA
Q33.132
GX53 Q35.132
Pcs 1
Kg 5,6
mc 0,061

EVA/TOBIA
Q33.181
GX53 Q35.181
Pcs 1
Kg 12,3
mc 0,168

TOBIA
Q33.000
GX53 Q35.000
Pcs 1
Kg 4,6
mc 0,043

LOT/TOBIA
Q33.113
GX53 Q35.113
Pcs 1
Kg 5,8
mc 0,061

MIRRA/TOBIA
Q33.142
GX53 Q35.142
Pcs 1
Kg 10,9
mc 0,083

SICHEM/TOBIA
Q33.121
GX53 Q35.121
Pcs 1
Kg 5,4
mc 0,061

RICU/TOBIA
Q33.157
GX53 Q35.157
Pcs 2
Kg 29,2
mc 0,334

GIGI/TOBIA
Q33.156
GX53 Q35.156
Pcs 2
Kg 27,7
mc 0,304

ARTU'/TOBIA
Q33.158
GX53 Q35.158
Pcs 2
Kg 24,7
mc 0,273

ALOE'/TOBIA
Q33.163 resin
GX53 Q35.163 resin
Pcs 2
Kg 15,2
mc 0,208

IAFET.R/TOBIA
Q33.162 resin
GX53 Q35.162 resin
Pcs 2
Kg 14,5
mc 0,179

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

NEBO/TOBIA

LARGE SIZE



Q33.201.Q1L



Q33.142.Q1L



Q33.201.R20.Q1L



Q33.201.R30.Q1L



MADE IN ITALY



NEBO OFIR/TOBIA 2L
Q33.201.R20

GX53 Q35.201.R20

Pcs 1
Kg 31,8
mc 0,268

NEBO OFIR/TOBIA 3L
Q33.201.R30

GX53 Q35.201.R30

Pcs 1
Kg 36,5
mc 0,342

NEBO/TOBIA
Q33.201

GX53 Q35.201

Pcs 1
Kg 25,6
mc 0,196

Ø 275

NEBO OFIR/TOBIA 2L
Q33.201.R20

GX53 Q35.201.R20

Pcs 1
Kg 31,9
mc 0,268

Ø 275

NEBO OFIR/TOBIA 3L
Q33.201.R30

GX53 Q35.201.R30

Pcs 1
Kg 36,5
mc 0,342

Ø 275

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

TABOR/TOBIA

LARGE SIZE



Q33.204.R20.Q1L



Q33.204.R30



Q33.204.N2R



MADE IN ITALY



TABOR OFIR/TOBIA 2L
Q33.204.R20
GX53 Q35.204.R20

Pcs 1
Kg 36,5
mc 0,295

850

3130

2

TABOR OFIR/TOBIA 3L
Q33.204.R30
GX53 Q35.204.R30

Pcs 1
Kg 41,1
mc 0,369

890

3130

3

TABOR/TOBIA
Q33.204
GX53 Q35.204

Pcs 1
Kg 30,1
mc 0,223

330

3460

2

Ø 275

TABOR OFIR/TOBIA 2L
Q33.204.R20
GX53 Q35.204.R20

Pcs 1
Kg 36,5
mc 0,295

850

3560

2

Ø 275

TABOR OFIR/TOBIA 3L
Q33.204.R30
GX53 Q35.204.R30

Pcs 1
Kg 41,1
mc 0,369

890

3560

3

Ø 275

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

HOREB/TOBIA

LARGE SIZE



Q33.207.M20.Q1L



Q33.17.Q1L1



Q35.207.D4K

MADE IN ITALY



HOREB ADAM/TOBIA 1L
Q33.207.M10
GX53 Q35.207.M10

Pcs 1
Kg 34,5
mc 0,280

ADAM/TOBIA
Q33.171
GX53 Q35.171

Pcs 1
Kg 6,1
mc 0,083

HOREB ADAM/TOBIA 2+1
Q33.207.M21
GX53 Q35.207.M21

Pcs 1
Kg 46,4
mc 0,404

HOREB/TOBIA
Q33.207
GX53 Q35.207

Pcs 1
Kg 32,6
mc 0,249

Ø 275

HOREB ADAM/TOBIA 3+1
Q33.207.M31
GX53 Q35.207.M31

Pcs 1
Kg 52,4
mc 0,476

Ø 275

HOREB ADAM/TOBIA 3L
Q33.207.M30
GX53 Q35.207.M30

Pcs 1
Kg 47,8
mc 0,414

HOREB ADAM/TOBIA 2L
Q33.207.M20
GX53 Q35.207.M20

Pcs 1
Kg 41,8
mc 0,342

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

KARMEL 3000/TOBIA

LARGE SIZE



Q33.231.R20.Q1L




Q33.231.R30.Q1L



Q33.231.Q1L

MADE IN ITALY



KARMEL 3000 OFIR/TOBIA 2L
Q33.231.R20
GX53 Q35.231.R20

Pcs 1
Kg 36,5
mc 0,295

850

3130

2

KARMEL 3000 OFIR/TOBIA 3L
Q33.231.R30
GX53 Q35.231.R30

Pcs 1
Kg 41,1
mc 0,369

890

3130

3

KARMEL 3000/TOBIA
Q33.231
GX53 Q35.231

Pcs 1
Kg 30,1
mc 0,223

330

3460

2

Ø 275

Ø 275

KARMEL 3000 OFIR/TOBIA 2L
Q33.231.R20
GX53 Q35.231.R20

Pcs 1
Kg 36,5
mc 0,295

850

3560

2

Ø 275

KARMEL 3000 OFIR/TOBIA 3L
Q33.231.R30
GX53 Q35.231.R30

Pcs 1
Kg 41,1
mc 0,369

890

3560

3

Ø 275

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

KARMEL 3500-4000/TOBIA

LARGE SIZE



Q33.234.M21.Q1L



Q33.171.Q1L




Q33.234.M20.Q1L




MADE IN ITALY




KARMEL 3500 ADAM/TOBIA 1L	KARMEL 4000 ADAM/TOBIA 1L
Q33.234.M10	Q33.237.M10
GX53 Q35.234.M10	Q35.237.M10
Pcs 1 Kg 34,5 mc 0,280	Pcs 1 Kg 38 mc 0,287

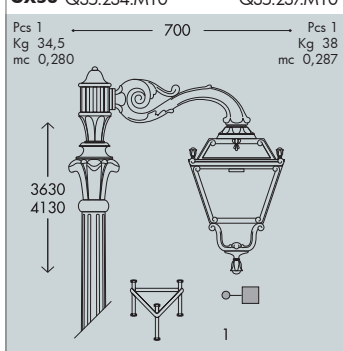


KARMEL 3500/TOBIA	
Q33.234	
GX53 Q35.234	
Pcs 1 Kg 32,6 mc 0,249	

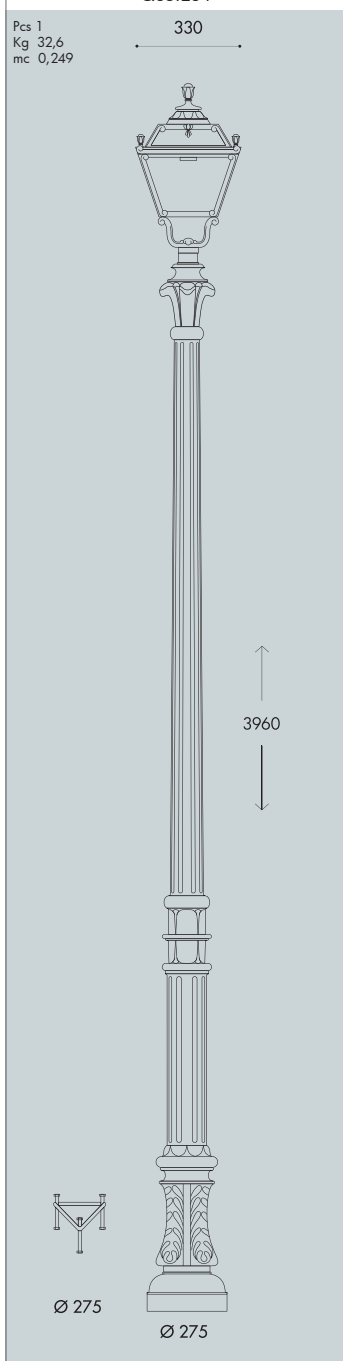


KARMEL 3500 ADAM/TOBIA 2+1	KARMEL 4000 ADAM/TOBIA 2+1
Q33.234.M21	Q33.237.M21
GX53 Q35.234.M21	Q35.237.M21
Pcs 1 Kg 46,4 mc 0,404	Pcs 1 Kg 48,9 mc 0,431

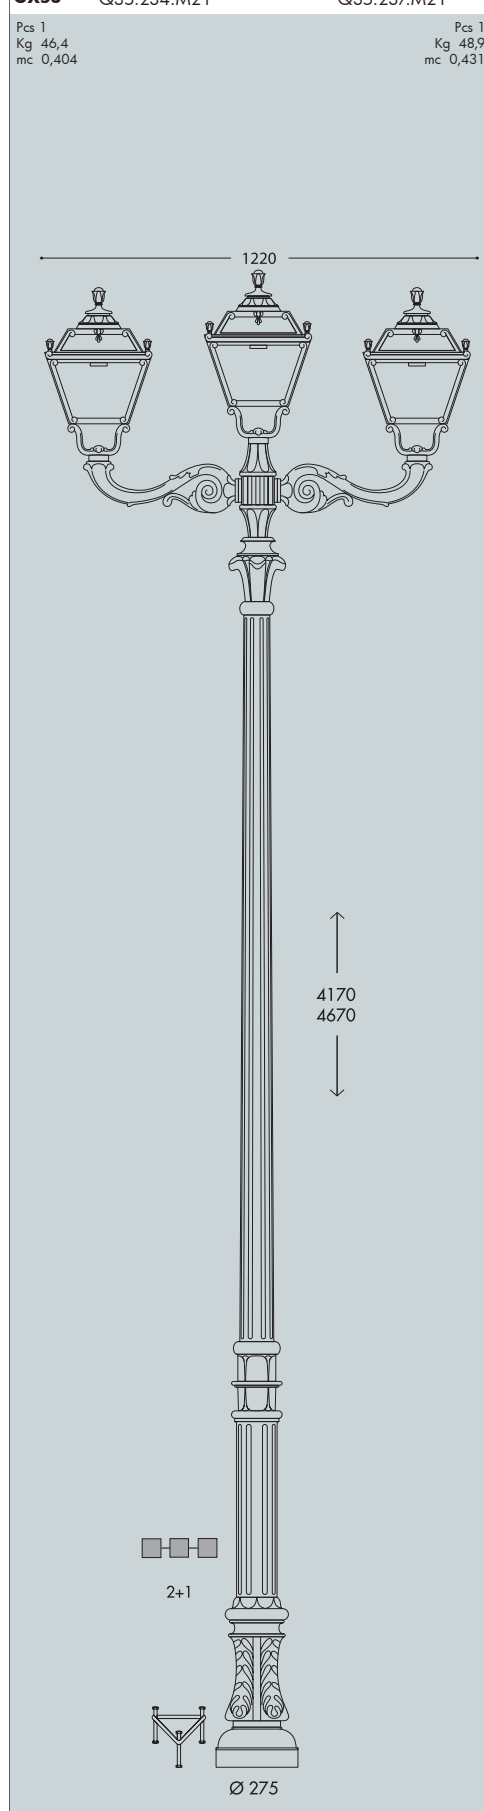


KARMEL 3500 ADAM/TOBIA 3L	KARMEL 4000 ADAM/TOBIA 3L
Q33.234.M30	Q33.237.M30
GX53 Q35.234.M30	Q35.237.M30
Pcs 1 Kg 47,8 mc 0,414	Pcs 1 Kg 50,3 mc 0,441

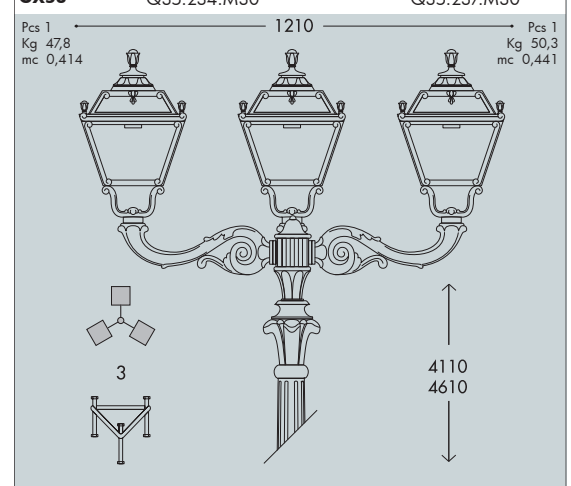

KARMEL 3500 ADAM/TOBIA 3+1	KARMEL 4000 ADAM/TOBIA 3+1
Q33.234.M31	Q33.237.M31
GX53 Q35.234.M31	Q35.237.M31
Pcs 1 Kg 52,4 mc 0,476	Pcs 1 Kg 54,9 mc 0,503

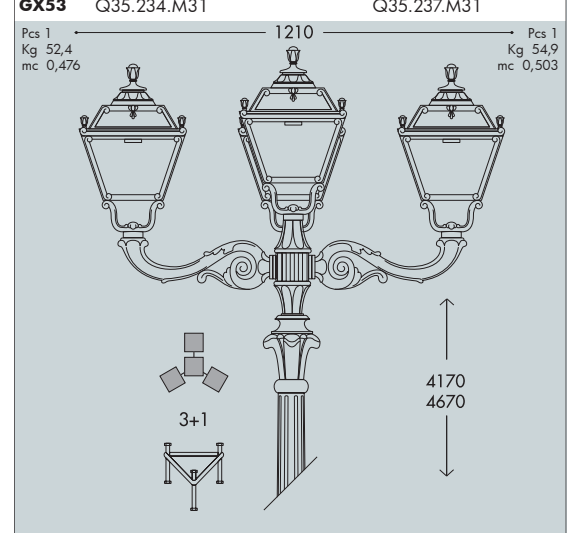

KARMEL 3500 ADAM/TOBIA 2L	KARMEL 4000 ADAM/TOBIA 2L
Q33.234.M20	Q33.237.M20
GX53 Q35.234.M20	Q35.237.M20
Pcs 1 Kg 41,8 mc 0,342	Pcs 1 Kg 44,3 mc 0,369

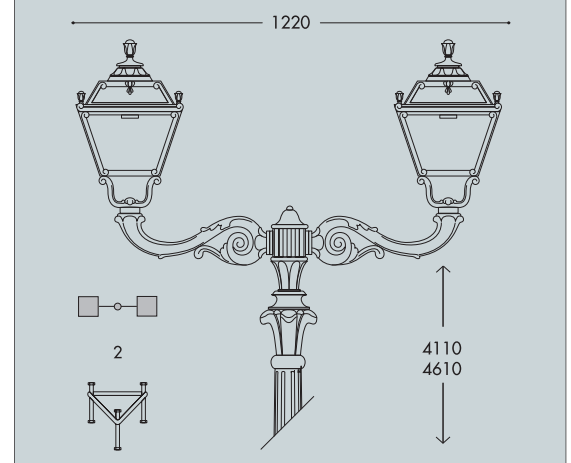

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SIMON HIGH POWER LED

LARGE SIZE



Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna quadra realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



U33.132.Q1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV S00



SIMON HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Removibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SIMON HIGH POWER LED

U33.000 *



Dimensions and weight

Height: 560 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure: CxS = m² 0,102

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.



		100 - 240 V		*ADD. SUFFIX
E27		15 W	1800 Lm	4000 K .R1L
				3000 K .R1R
E27		30 W	3500 Lm	4000 K .Q1L
				3000 K .Q1R
E27		50 W	5300 Lm	4000 K .H1L
				3000 K .H1R

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE



SAVE -65%

HIGH POWER LED 30W
(power consumption)

Area: 10x10mt
Height: 3.5mt
15 lux

SON 70W
power consumption = 84W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SIMON E27

LARGE SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.

E27 FILAMENT LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



U33.000.N1R





SIMON E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e idoneo per il fissaggio dei reattori.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. One piece only closed at the base to ensure high protection against external agent.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Realizzato in un unico pezzo chiuso alla base per garantire un alto livello di protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SIMON E27

U33.000 *



Dimensions and weight

Height: 560 mm
Width: 330 mm
Depth: 330 mm
Weight: 3,8 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,102

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

E27



E27 lantern supplied as an option with TÜV-CB certified, long-life and efficient **LED filament lamps suitable for outdoor use.**

100 - 240 V		*ADD. SUFFIX	
Suitable lamps: CFL-LED-SON-HQI MAX 70W	E27 lampholder only	.E27	
8W	1000 Lm	4000 K .M1L	2700 K .M1R
12W	1500 Lm	4000 K .N1L	2700 K .N1R

2x E27



2x E27 lantern provided as an option with TÜV certified, long-life and efficient **LED filament lamps suitable for outdoor use.** Version with daylight and motion sensor available.



100 - 240 V		*ADD. SUFFIX	
Suitable lamps: CFL-LED max 160 mm	2x E27 lampholder only	.E28	
2x 8 W 16W	2000 Lm	4000 K .M2L	2700 K .M2R
2x 12 W 24W	3000 Lm	4000 K .N2L	2700 K .N2R

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE



SIMON lantern clear SON 70W.

POST height 3.5mt
10 x 10mt area: average 11 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

SIMON GX53 LED - FLAT DIFFUSER

LARGE SIZE



Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified, long-life, powerful, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 65.

*Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con **sistema modulare a LED GX53 con Kelvin impostabile**, certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.*



U35.132.D4K

CCT SETTABLE

SDCM <6

3000 K 4000 K 6500 K

UV TREATED	DOUBLE INSULATION	+90° -60°	PUBLIC	RESIDENTIAL	ZONE 1
RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL	POST	HANGING

MADE IN ITALY



SIMON GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

LANTERN ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER with flat shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFFUSORE in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

SIMON GX53 LED

U35.000 *



Dimensions and weight

Height: 560 mm
Width: 330 mm
Depth: 330 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure: CxS = m² 0,102

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin CEILING provided with 4X TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

		100 - 240 V		*ADD. SUFFIX	
GX53 LED	4x 7 W 28 W	3200 Lm	6500 K	.C4K	
			4000 K		
	4x 10 W 40 W	4800 Lm	6500 K	.D4K	
			4000 K		
			3000 K		

LED LAMPS




Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

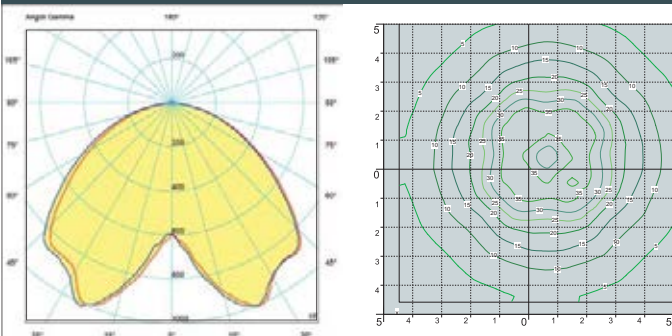

SAVE **-65%**

4x10W GX53 LED 40W
(power consumption)

Area: 10x10mt
Height: 4mt
22 lux

=

SON 100W
power consumption = 112W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

SIMON

LARGE SIZE



U33.157.Q1L



U33.121.Q1L



U33.132.Q1L



U33.113.Q1L



U33.162.Q1L



MADE IN ITALY



OFIR/SIMON
U33.132
GX53 U35.132
Pcs 1
Kg 5,6
mc 0,061

EVA/SIMON
U33.181
GX53 U35.181
Pcs 1
Kg 12,3
mc 0,168

SIMON
U33.000
GX53 U35.000
Pcs 1
Kg 4,6
mc 0,043

LOT/SIMON
U33.113
GX53 U35.113
Pcs 1
Kg 5,8
mc 0,061

MIRRA/SIMON
U33.142
GX53 U35.142
Pcs 1
Kg 10,9
mc 0,083

SICHEM/SIMON
U33.121
GX53 U35.121
Pcs 1
Kg 5,4
mc 0,061

RICU/SIMON
U33.157
GX53 U35.157
Pcs 2
Kg 29,2
mc 0,334

GIGI/SIMON
U33.156
GX53 U35.156
Pcs 2
Kg 27,7
mc 0,304

ARTU'/SIMON
U33.158
GX53 U35.158
Pcs 2
Kg 24,7
mc 0,273

ALOE'/SIMON
U33.163 resin
GX53 U35.163 resin
Pcs 2
Kg 15,2
mc 0,208

IAFET.R/SIMON
U33.162 resin
GX53 U35.162 resin
Pcs 2
Kg 14,5
mc 0,179

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

NEBO/SIMON

LARGE SIZE



U33.201.R20.Q1L



U33.201.R30.Q1L



U35.201.D4K





NEBO OFIR/SIMON 2L
U33.201.R20
GX53 U35.201.R20

Pcs 1
Kg 31,9
mc 0,268

NEBO OFIR/SIMON 3L
U33.201.R30
GX53 U35.201.R30

Pcs 1
Kg 36,5
mc 0,342

NEBO/SIMON
U33.201
GX53 U35.201

Pcs 1
Kg 25,6
mc 0,196

NEBO OFIR/SIMON 2L
U33.201.R20
GX53 U35.201.R20

Pcs 1
Kg 31,9
mc 0,268

NEBO OFIR/SIMON 3L
U33.201.R30
GX53 U35.201.R30

Pcs 1
Kg 36,5
mc 0,342

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

TABOR/SIMON

LARGE SIZE



U33.204.R30.Q1L



U33.204.R20.Q1L



U33.204.Q1L



MADE IN ITALY



TABOR OFIR/SIMON 2L
U33.204.R20
GX53 U35.204.R20
Pcs 1
Kg 36,5
mc 0,268

TABOR OFIR/SIMON 3L
U33.204.R30
GX53 U35.204.R30
Pcs 1
Kg 41,1
mc 0,342

TABOR/SIMON
U33.204
GX53 U35.204
Pcs 1
Kg 30,1
mc 0,196

TABOR OFIR/SIMON 2L
U33.204.R20
GX53 U35.204.R20
Pcs 1
Kg 36,5
mc 0,268

TABOR OFIR/SIMON 3L
U33.204.R30
GX53 U35.204.R30
Pcs 1
Kg 41,1
mc 0,342

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

HOREB/SIMON

LARGE SIZE



U33.207.M20.Q1L



U33.171.Q1L



U33.207.M10.Q1L



MADE IN ITALY



HOREB ADAM/SIMON 1L
U33.207.M10
GX53 U35.207.M10

Pcs 1
Kg 34,5
mc 0,280

ADAM/SIMON
U33.171
GX53 U35.171

Pcs 1
Kg 6,1
mc 0,083

HOREB ADAM/SIMON 2+1
U33.207.M21
GX53 U35.207.M21

Pcs 1
Kg 46,4
mc 0,404

HOREB/SIMON
U33.207
GX53 U35.207

Pcs 1
Kg 32,6
mc 0,249

Ø 275

HOREB ADAM/SIMON 3+1
U33.207.M31
GX53 U35.207.M31

Pcs 1
Kg 52,4
mc 0,476

Ø 275

HOREB ADAM/SIMON 3L
U33.207.M30
GX53 U35.207.M30

Pcs 1
Kg 47,8
mc 0,414

HOREB ADAM/SIMON 2L
U33.207.M20
GX53 U35.207.M20

Pcs 1
Kg 41,8
mc 0,342

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

KARMEL 3000/SIMON

LARGE SIZE



U33.231.R30.Q1L



U33.231.R20.Q1L



U33.231.Q1R



MADE IN ITALY



KARMEI 3000 OFIR/SIMON 2L
U33.231.R20
U35.231.R20

GX53
Pcs 1
Kg 36,5
mc 0,295

KARMEI 3000 OFIR/SIMON 3L
U33.231.R30
U35.231.R30

GX53
Pcs 1
Kg 41,1
mc 0,369

KARMEI 3000/SIMON
U33.231
U35.231

GX53
Pcs 1
Kg 30,1
mc 0,223

KARMEI 3000 OFIR/SIMON 2L
U33.231.R20
U35.231.R20

GX53
Pcs 1
Kg 36,5
mc 0,295

KARMEI 3000 OFIR/SIMON 3L
U33.231.R30
U35.231.R30

GX53
Pcs 1
Kg 41,1
mc 0,369

KARMEL 3500-4000/SIMON

LARGE SIZE



U33.234.M20.Q1L



U33.171.Q1L



U33.234.Q1R





KARMEL 3500 ADAM/SIMON 1L	KARMEL 4000 ADAM/SIMON 1L
U33.234.M10	U33.237.M10
GX53 U35.234.M10	U35.237.M10
Pcs 1 Kg 34,5 mc 0,280	Pcs 1 Kg 38 mc 0,287

KARMEL 3500/SIMON
U33.234
GX53 U35.234
Pcs 1 Kg 32,6 mc 0,249

Ø 275

KARMEL 3500 ADAM/SIMON 2+1	KARMEL 4000 ADAM/SIMON 2+1
U33.234.M21	U33.237.M21
GX53 U35.234.M21	U35.237.M21
Pcs 1 Kg 46,4 mc 0,404	Pcs 1 Kg 48,8 mc 0,431

Ø 275

KARMEL 3500 ADAM/SIMON 3L	KARMEL 4000 ADAM/SIMON 3L
U33.234.M30	U33.237.M30
GX53 U35.234.M30	U35.237.M30
Pcs 1 Kg 47,8 mc 0,414	Pcs 1 Kg 50,3 mc 0,441

KARMEL 3500 ADAM/SIMON 3+1	KARMEL 4000 ADAM/SIMON 3+1
U33.234.M31	U33.237.M31
GX53 U35.234.M31	U35.237.M31
Pcs 1 Kg 52,4 mc 0,476	Pcs 1 Kg 54,8 mc 0,503

KARMEL 3500 ADAM/SIMON 2L	KARMEL 4000 ADAM/SIMON 2L
U33.234.M20	U33.237.M20
GX53 U35.234.M20	U35.237.M20
Pcs 1 Kg 41,8 mc 0,342	Pcs 1 Kg 44,3 mc 0,369

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ELIA HIGH POWER LED

GRAND SIZE



Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna quadra realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



Q43.000.W1R





ELIA HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material, UV-rays stabilized.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. Provided with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Provvisto di guarnizione in gomma silconica per garantire un alto livello di protezione contro gli agenti esterni.

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

ELIA HIGH POWER LED

Q43.000 *



Dimensions and weight

Height: 740 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,165

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:



Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life, and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.



100 - 240 V			*ADD. SUFFIX	
E27 	50 W	5300 Lm	4000 K	.H1L
			3000 K	.H1R
E27 	60 W	7000 Lm	4000 K	.W1L
			3000 K	.W1R


LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE






HIGH POWER LED
50W
(power consumption)

Area: 10x10mt
Height: 4.5mt
21 lux

=



SON 150W
power consumption = 165W

SAVE
-64%

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ELIA E27

GRAND SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lantern quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.



Q43.000.E27





ELIA E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and access to control-gear.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e idoneo per il fissaggio dei reattori.

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. Provided with silicone rubber gasket to ensure high protection against external agents.


DIFFUSORE in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

ELIA E27

Q43.000 *



Dimensions and weight

Height: 740 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,165

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

CHROME ALUMINIUM LOUVRE

H.FC6 open
Downward position



E27-E40

100 - 240 V

*ADD. SUFFIX



suitable lamps:

CFL-LED
SON-HQI
max 100W

E27
Lampholder only



.E27

E40
Lampholder only

.E40

Lantern supplied complete with **E27** or **E40** lampholder.

PHOTOMETRIC DATA SAMPLE



ELIA lantern clear SON 100W.

POST height 4,5mt
10 x 10mt area: average 12 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ELIA GX53 LED - FLAT DIFFUSER

GRAND SIZE



Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified, long-life, powerful, efficient and **kelvin settable GX53 LED modular system** in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 65.

*Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con **sistema modulare a LED GX53 con kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.*

Q45.000.D8K



CCT SETTABLE

3000 K 4000 K 6500 K

SDCM < 6





ELIA GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

LANTERN ROOF made of shockproof resin material, UV-rays stabilized. Tool-free opening for relamping and maintenance.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.

DIFFUSER with FLAT shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFFUSORE in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

ELIA GX53 LED

Q45.000 *



Dimensions and weight

Height: 740 mm
Width: 430 mm
Depth: 430 mm
Weight: 9,1 Kg

Area exposed to wind pressure:
CxS = m² 0,165

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin CEILING provided with 8x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


		100 - 240 V		*ADD. SUFFIX
	8x 7 W 56 W	6400 Lm	6500 K 4000 K 3000 K	.C8K
	8x 10 W 80 W	9600 Lm	6500 K 4000 K 3000 K	.D8K

LED LAMPS




Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

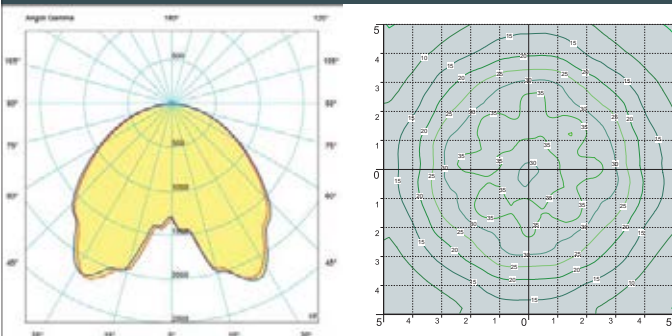

8x7W GX53 LED
56W
(power consumption)

Area: 10x10mt
Height: 4,5mt
28 lux

SAVE
-66%



SON 150W
power consumption = 165W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES


ELIA

GRAND SIZE



Q43.221.W1L





GIONA 5000/ELIA	
Q43.227	
GX53	Q45.227
Pcs 1 Kg 67,5 mc 1,112	430

5680

400

GIONA 4000/ELIA	GIONA 4500/ELIA
Q43.221	Q43.224
GX53 Q45.221	Q45.224
Pcs 1 Kg 62,5 mc 0,862	Pcs 1 Kg 65,5 mc 0,982

430

4680
5180

400

KARMEL 3500/ELIA	KARMEL 4000/ELIA
Q43.234	Q43.237
GX53 Q45.234	Q45.237
Pcs 1 Kg 38,6 mc 0,402	Pcs 1 Kg 42 mc 0,453

430

4180
4680

Ø 275

SICHEM/ELIA	
Q43.121	
GX53	Q45.121
Pcs 1 Kg 8 mc 0,182	1150

Ø 60

ELIA	
Q43.000	
GX53	Q45.000
Pcs 1 Kg 7,5 mc 0,182	430
740	
Ø 60	

TABOR/ELIA	HOREB/ELIA
Q43.204	Q43.207
GX53 Q45.204	Q45.207
Pcs 1 Kg 33 mc 0,362	Pcs 1 Kg 35,5 mc 0,402

430


3680
4180

Ø 275

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GIONA 4000/ELIA

GRAND SIZE

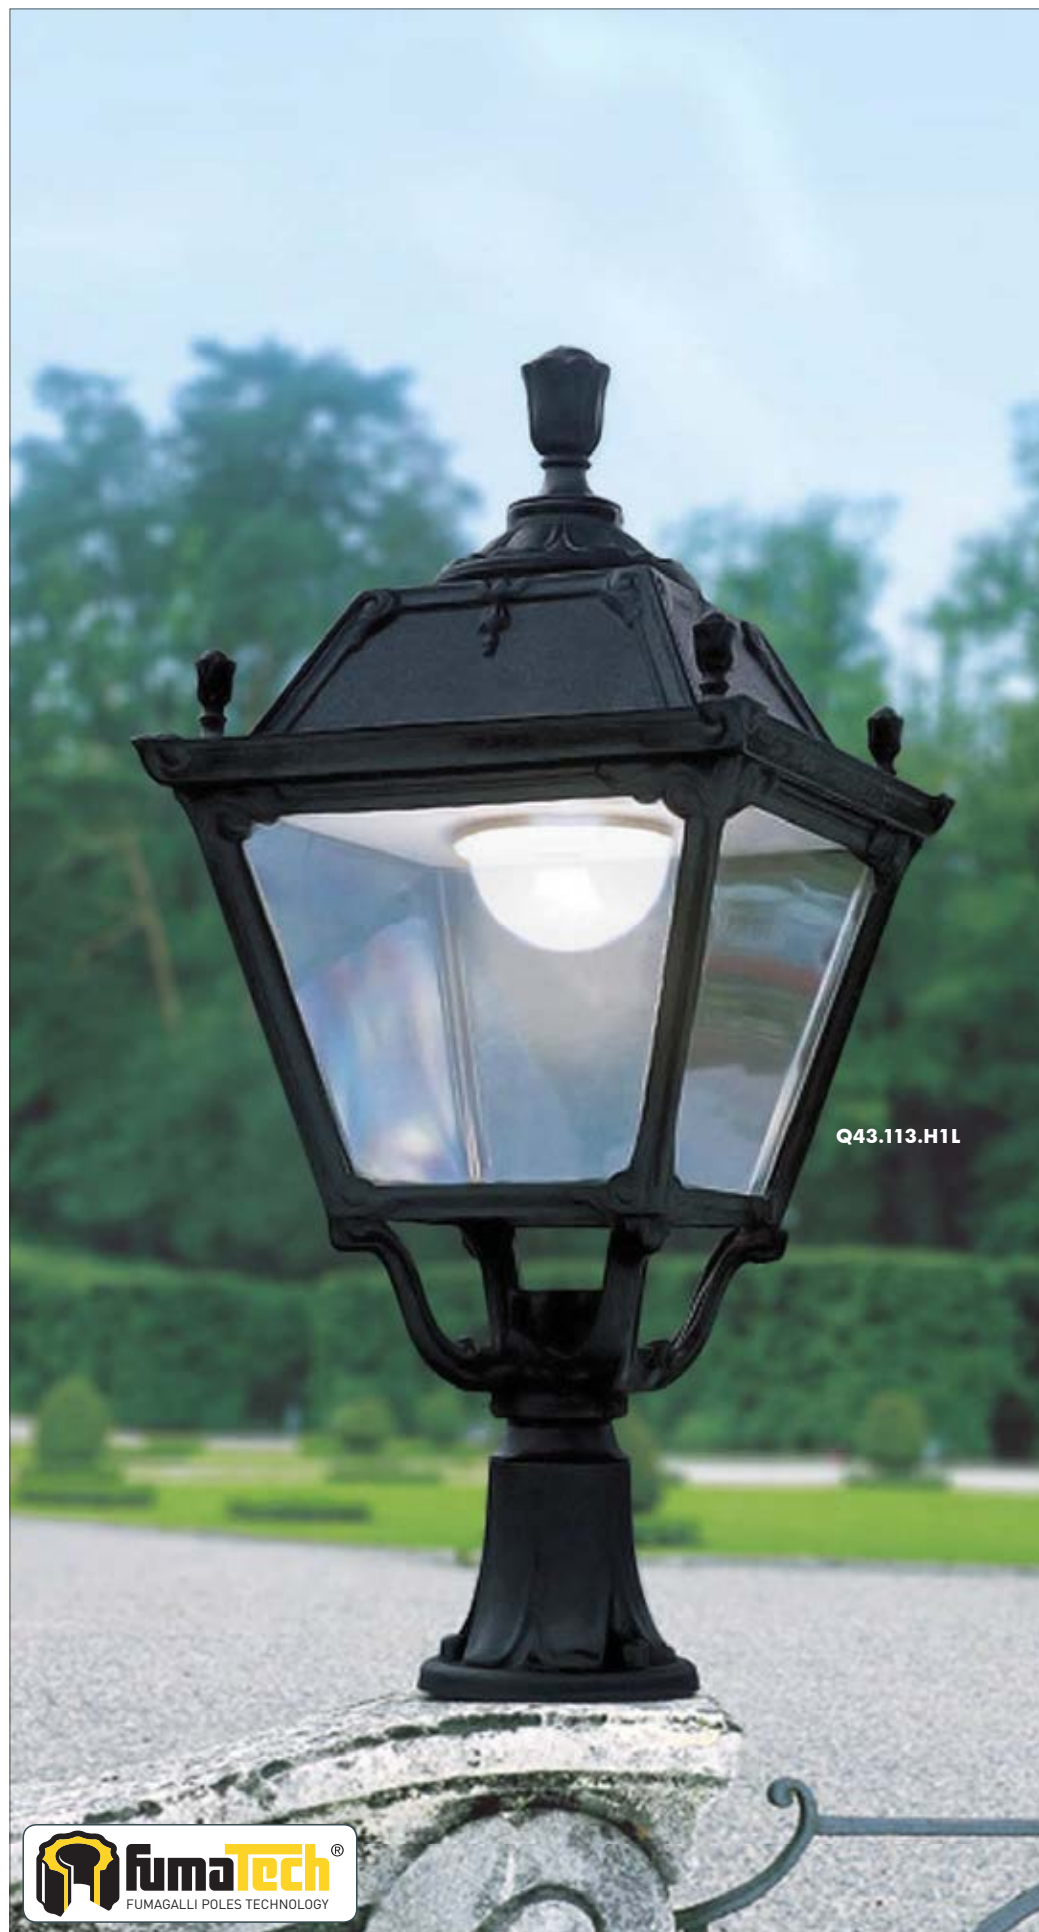

Q43.113.H1L




Q43.171.H1L



Q45.221.C8K

MADE IN ITALY



ADAM/ELIA
Q43.171
GX53 Q45.171
Pcs 1
Kg 9
mc 0,190

GIONA 4000 ADAM/ELIA 2L
Q43.221.M20
GX53 Q45.221.M20
Pcs 1
Kg 73
mc 0,863

LOT/ELIA
Q43.113
GX53 Q45.113
Pcs 1
Kg 8,4
mc 0,182

GIONA 4000 ADAM/ELIA 1L
Q43.221.M10
GX53 Q45.221.M10
Pcs 1
Kg 64
mc 0,752

GIONA 4000 ADAM/ELIA 2L
Q43.221.M20
GX53 Q45.221.M20
Pcs 1
Kg 82
mc 1,100

GIONA 4000 ADAM/ELIA 3L
Q43.221.M30
GX53 Q45.221.M30
Pcs 1
Kg 82
mc 1,100

GIONA 4000 ADAM/ELIA 2+1
Q43.221.M21
GX53 Q45.221.M21
Pcs 1
Kg 80,5
mc 0,931

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GIONA 4500-5000/ELIA

GRAND SIZE



Q43.224.N10.W1L



Q43.172.W1L



Q43.224.N20.W1L





GIONA 4500 ARON/ELIA		GIONA 5000 ARON/ELIA	
Q43.224.N10		Q43.227.N10	
GX53 Q45.224.N10	GX53 Q45.227.N10		
Pcs 1 Kg 71,5 mc 0,949	Pcs 1 Kg 73,5 mc 1,191		

ARON/ELIA	
Q43.172	
Q45.172	
GX53	
Pcs 1 Kg 13 mc 0,223	

GIONA 4500 ARON/ELIA 2L		GIONA 5000 ARON/ELIA 2L	
Q43.224.N20		Q43.227.N20	
Q45.224.N20		Q45.227.N20	
GX53	GX53		
Pcs 1 Kg 82,5 mc 1,196		Pcs 1 Kg 84,5 mc 1,329	

GIONA 4500 ARON/ELIA 4L		GIONA 5000 ARON/ELIA 4L	
Q43.224.N40		Q43.227.N40	
Q45.224.N40		Q45.227.N40	
GX53	GX53		
Pcs 1 Kg 105 mc 1,444		Pcs 1 Kg 107 mc 1,605	

ERMON.R/ELIA	
Q43.195 resin	
Q45.195 resin	
GX53	
Pcs 1 Kg 13,5 mc 0,250	

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

PIETRO HIGH POWER LED

GRAND SIZE



Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lanterna quadra realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



U43.000.H1L





PIETRO HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

Lantern **ROOF** made of shockproof resin material. UV-rays stabilized.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.

DIFFUSER with FLAT shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFFUSORE in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

PIETRO HIGH POWER LED

U43.000 *



Dimensions and weight

Height: 770 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,182

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.



		100 - 240 V		*ADD. SUFFIX	
E27		50 W	5300 Lm	4000 K	.H1L
				3000 K	.H1R
E27		60 W	7000 Lm	4000 K	.W1L
				3000 K	.W1R

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE



SAVE -64%

HIGH POWER LED 50W
(power consumption)

Area: 10x10mt
Height: 4.5mt
21 lux

SON 150W
power consumption = 165W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

PIETRO E27

GRAND SIZE



E27 square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Provided with high temperature resistant ceiling suitable for ballast fixation. Insulation class II, protection rating IP 55.

Lanterna quadra E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con soffitto ad alta resistenza al calore idoneo per il fissaggio dei reattori. Classe di isolamento II, grado di protezione IP55.



U43.000.E27

--	--	--	--





PIETRO E27 - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

ROOF made of shockproof resin material, UV-rays stabilized.

***TETTO** realizzato in resina antiurto, stabilizzata ai raggi UV.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and suitable for ballast fixation.

***SOFFITTO** riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e idoneo per il fissaggio dei reattori.*

DIFFUSER with FLAT shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

***DIFFUSORE** in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.*

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

PIETRO E27

U43.000 *



Dimensions and weight

Height: 770 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,182

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

CHROME ALUMINIUM LOUVRE

H.FC6 open
Downward position



E27-E40

100 - 240 V

*ADD. SUFFIX



Lantern supplied complete with **E27** or **E40** lampholder.

suitable lamps:

CFL-LED
SON-HQI
max 100W



E27
Lampholder only

.E27

E40
Lampholder only

.E40

PHOTOMETRIC DATA SAMPLE



***PIETRO** lantern clear SON 100W.*

*POST height 4,5mt
10 x 10mt area: average 12 lux*

The photometric data for all the versions are available upon request or on our website.

PIETRO GX53 LED - FLAT DIFFUSER

GRAND SIZE



Square lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified, long-life, powerful, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 65.

*Lanterna quadra in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.*

U45.000.D8K



CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6



PIETRO GX53 LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

PINNACOLO decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).

LANTERN ROOF made of shockproof resin material, UV-rays stabilized.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV.

DIFFUSER with **FLAT** shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

DIFFUSORE in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

GABBIA realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

PIETRO GX53 LED

U45.000 *



Dimensions and weight

Height: 770 mm
Width: 430 mm
Depth: 430 mm
Weight: 9,1 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,182

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin **CEILING** provided with 8x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


		100 - 240 V		*ADD. SUFFIX	
	8x 7 W 56 W	6400 Lm	6500 K	.C8K	
			4000 K		
	8x 10 W 80 W	9600 Lm	6500 K	.D8K	
			4000 K		
			3000 K		

LED LAMPS





Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

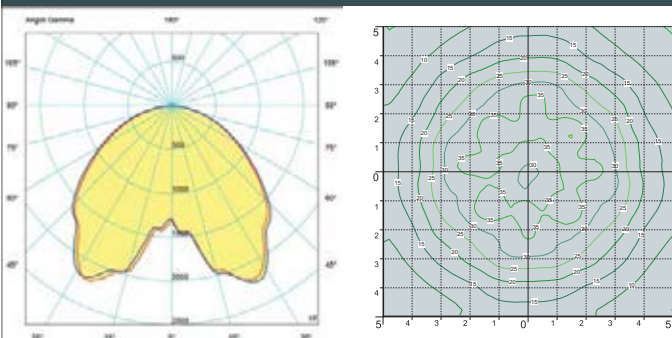

8x7W GX53 LED
56W
(power consumption)

Area: 10x10mt
Height: 4,5mt
28 lux

SAVE
-66%



SON 150W
power consumption = 165W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

PIETRO

GRAND SIZE



U43.224.H1L



U43.113.D8K

MADE IN ITALY



COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GIONA 5000/PIETRO	
	U43.227
GX53	U45.227
Pcs 1 Kg 67,5 mc 1,112	430

GIONA 4000/PIETRO	GIONA 4500/PIETRO
U43.221	U43.224
GX53 U45.221	U45.224
Pcs 1 Kg 62,5 mc 0,862	Pcs 1 Kg 65,5 mc 0,982
430	

KARMELO 3500/PIETRO	KARMELO 4000/PIETRO
U43.234	U43.237
GX53 U45.234	U45.237
Pcs 1 Kg 38,6 mc 0,402	Pcs 1 Kg 42 mc 0,453
430	

LOT/PIETRO	
	U43.113
GX53	U45.113
Pcs 1 Kg 8,4 mc 0,182	430

KARMELO 3000/PIETRO	
	U43.231
GX53	U45.231
Pcs 1 Kg 33 mc 0,362	430

PIETRO	
	U43.000
GX53	U45.000
Pcs 1 Kg 7,5 mc 0,182	430

TABOR/PIETRO	HOREB/PIETRO
U43.204	U43.207
GX53 U45.204	U45.207
Pcs 1 Kg 33 mc 0,362	Pcs 1 Kg 35,5 mc 0,402
430	

--	--

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GIONA 4000/PIETRO

GRAND SIZE



U43.221.M21.W1L



U43.171.W1L



U45.221.M10.C8K

MADE IN ITALY

ADAM/PIETRO
U43.171
GX53 U45.171
Pcs 1
Kg 9
mc 0,190

GIONA 4000 ADAM/PIETRO 1L
U43.221.M10
GX53 U45.221.M10

Pcs 1
Kg 64
mc 0,752

GIONA 4000 ADAM/PIETRO 3L
U43.221.M30
GX53 U45.221.M30

Pcs 1
Kg 82
mc 1,100

SICHEM/PIETRO
U43.121
GX53 U45.121

Pcs 1
Kg 8
mc 0,182

GIONA 4000 ADAM/PIETRO 2+1
U43.221.M21
GX53 U45.221.M21

Pcs 1
Kg 80,5
mc 0,931

GIONA 4000 ADAM/PIETRO 2L
U43.221.M20
GX53 U45.221.M20

Pcs 1
Kg 73
mc 0,863

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GIONA 4500-5000/PIETRO

GRAND SIZE



U43.224.N20.W1L



U43.224.N10.H1L



U43.195





GIONA 4500 ARON/ PIETRO 1L		GIONA 5000 ARON/ PIETRO 1L	
E27	U43.224.N10	U43.227.N10	
GX53	U45.224.N10	U45.227.N10	
Pcs 1 Kg 71,5 mc 0,949		Pcs 1 Kg 73,5 mc 1,191	

ARON/PIETRO	
E27	U43.172
GX53	U45.172
Pcs 1 Kg 13 mc 0,223	

GIONA 4500 ARON/PIETRO 2L		GIONA 5000 ARON/PIETRO 2L	
E27	U43.224.N20	E27	U43.227.N20
GX53	U45.224.N20	GX53	U45.227.N20
Pcs 1 Kg 82,5 mc 1,196		Pcs 1 Kg 84,5 mc 1,329	

GIONA 4500 ARON/PIETRO 4L		GIONA 5000 ARON/PIETRO 4L	
E27	U43.224.N40	E27	U43.227.N40
GX53	U45.224.N40	GX53	U45.227.N40
Pcs 1 Kg 105 mc 1,444		Pcs 1 Kg 107 mc 1,605	

ERMON.R/PIETRO	
E27	U43.195 resin
GX53	U45.195 resin
Pcs 1 Kg 13,5 mc 0,250	

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 400 CLASSIC

LARGE SIZE



Ø 400 mm PMMA globe, complete with classic base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP65.

Globo Ø 400 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 e predisposta per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP65.

G40.B40.E27FC1






GLOBE 400 CLASSIC - COMPONENTS

IP65



400 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 400 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

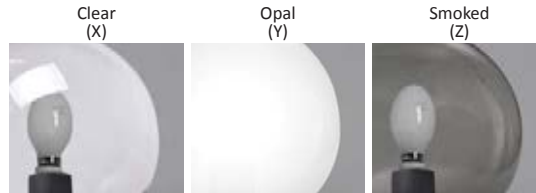

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Globe **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support and of a cover provided with E27 lampholder. A rubber gasket assures the protection of the electrical accessories seat against external agents.

BASE del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalamпада E27 (incluso). Una guarnizione in gomma garantisce la protezione dell'alloggiamento degli accessori elettrici dagli agenti esterni.

GLOBE 400 CLASSIC

G40.B40 *



Dimensions and weight

Height: 410 mm
Diameter: 400 mm
Junction to support: diameter 60 mm
Weight: 2,3 Kg
Area exposed to wind pressure: CxS = m² 0,122

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal Smoked

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position



H.FC6 open
Downward position



E27

*ADD. SUFFIX



suitable lamps:


CFL-LED
max 50W

E27
Lampholder only

.E27

Globe complete with classic base and E27 lampholder.

PHOTOMETRIC DATA SAMPLE

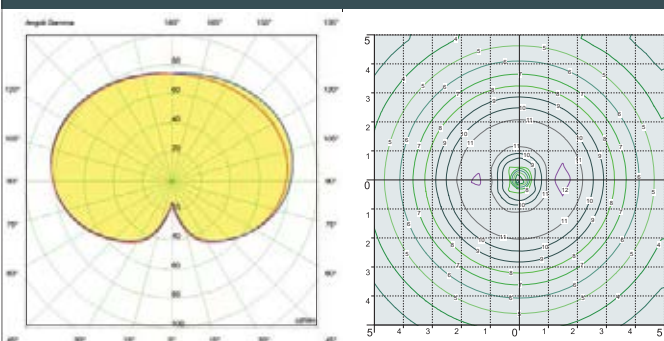

GLOBE 400 clear E27 High Power LED 50W.

POST height 3,5mt
10x10mt area: average 7 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THE ABOVE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

TABOR/GLOBE 400 CLASSIC

LARGE SIZE



G40.204.R30



G40.132



G40.204



MADE IN ITALY



OFIR/G400
G40.132

Pcs 2
Kg 6,1
mc 0,133

ADAM/G400
G40.171

Pcs 2
Kg 7,5
mc 0,192

GLOBE 400 CLASSIC
G40.B40

Pcs 2
Kg 4,7
mc 0,133

TABOR/G400
G40.204

Pcs 1
Kg 27,9
mc 0,230

TABOR OFIR/G400 2L
G40.204.R20

Pcs 1
Kg 33,2
mc 0,347

TABOR OFIR/G400 3L
G40.204.R30

Pcs 1
Kg 36
mc 0,429

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

HOREB/GLOBE 400 CLASSIC

LARGE SIZE



HOREB ADAM/G400 1L
G40.207.M10

Pcs 1
Kg 32,2
mc 0,310

735

3630

Ø 400

Ø 190

1

LOT/G400
G40.113

Pcs 2
Kg 6,5
mc 0,152

Ø 400

710

Ø 190

SICHEM/G400
G40.121

Pcs 2
Kg 5,3
mc 0,133

960

Ø 400

HOREB ADAM/G400 2L
G40.207.M20

Pcs 1
Kg 35,7
mc 0,378

Ø 400

4190

2

HOREB/G400
G40.207

Pcs 1
Kg 30,3
mc 0,256

Ø 400

4020

Ø 275

HOREB ADAM/G400 3+1
G40.207.M31

Pcs 1
Kg 41,6
mc 0,545

1280

Ø 400

4240

Ø 275

3+1

HOREB ADAM/G400 2+1
G40.207.M21

Pcs 1
Kg 38
mc 0,447

1300

Ø 400

4240

2+1

HOREB ADAM/G400 3L
G40.207.M30

Pcs 1
Kg 39,4
mc 0,477

1280

Ø 400

4190

3

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

KARMELO 3000/GLOBE 400 CLASSIC

LARGE SIZE



G40.231.R20



G40.231.R30



G40.231



MADE IN ITALY



KARMEL 3000/G400
G40.231

Pcs 1
Kg 27,9
mc 0,230

Ø 400

3520

Ø 275

KARMEL 3000 OFIR/G400 2L
G40.231.R20

Pcs 1
Kg 33,2
mc 0,347

920

Ø 400

3620

Ø 275

2

KARMEL 3000 OFIR/G400 3L
G40.231.R30

Pcs 1
Kg 36
mc 0,429

960

Ø 400

3620

Ø 275

3

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

KARMEL 3500-4000/GLOBE 400 CLASSIC

LARGE SIZE



G40.234.M20



G40.171



G40.234



MADE IN ITALY



KARMEL 3500 ADAM/G400 1L	KARMEL 4000 ADAM/G400 1L
G40.234.M10	G40.237.M10
Pcs 1 Kg 32,2 mc 0,310	Pcs 1 Kg 34,7 mc 0,407

EVA/G400 2L
G40.181
Pcs 1 Kg 79 mc 0,353

KARMEL 3500 ADAM/G400 3L	KARMEL 4000 ADAM/G400 3L
G40.234.M30	G40.237.M30
Pcs 1 Kg 39,4 mc 0,477	Pcs 1 Kg 41,9 mc 0,482

KARMEL 3500/G400	KARMEL 4000/G400
G40.234	G40.237
Pcs 1 Kg 30,3 mc 0,256	Pcs 1 Kg 32,8 mc 0,283

KARMEL 3500 ADAM/G400 2+1	KARMEL 4000 ADAM/G400 2+1
G40.234.M21	G40.237.M21
Pcs 1 Kg 38 mc 0,420	Pcs 1 Kg 40,5 mc 0,545

KARMEL 3500 ADAM/G400 3+1	KARMEL 4000 ADAM/G400 3+1
G40.234.M31	G40.237.M31
Pcs 1 Kg 41,6 mc 0,502	Pcs 1 Kg 44,1 mc 0,545

KARMEL 3500 ADAM/G400 2L	KARMEL 4000 ADAM/G400 2L
G40.234.M20	G40.237.M20
Pcs 1 Kg 35,7 mc 0,378	Pcs 1 Kg 38,2 mc 0,400

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GIONA 4000/GLOBE 400 CLASSIC

LARGE SIZE



G40.221.M21



G40.221.M30





GIONA 4000 ADAM/G400 1L
G40.221.M10

Pcs 1
Kg 59,2
mc 0,897

GIONA 4000 ADAM/G400 3+1
G40.221.M31

Pcs 1
Kg 69,1
mc 1,32

GIONA 4000 ADAM/G400 2L
G40.221.M20

Pcs 1
Kg 63
mc 0,965

GIONA 4000 ADAM/G400 2+1
G40.221.M21

Pcs 1
Kg 65,3
mc 1,034

GIONA 4000 ADAM/G400 3L
G40.221.M30

Pcs 1
Kg 66,7
mc 1,064

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GLOBE 500 CLASSIC


GRAND SIZE



Ø 500 mm PMMA globe, complete with classic base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP65.

Globo Ø 500 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 e predisposta per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP65.

G50.B50.E27FC1

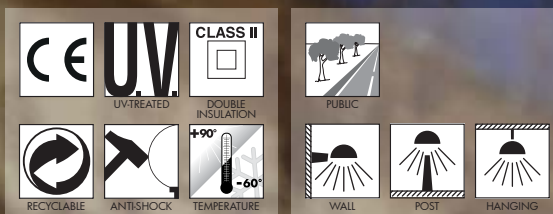


GLOBE 500 CLASSIC - COMPONENTS

IP65



500 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 500 mm Ø 500 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

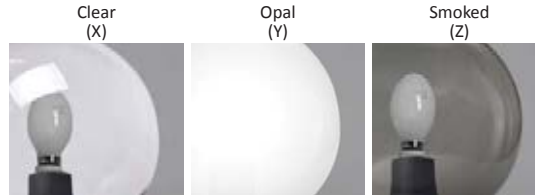

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Luminaries **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support and of a cover provided with E27 - E40 lampholder. A rubber gasket assures the protection of the electrical accessories seat from external agents.

BASE del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalampada E27 (incluso). Una guarnizione in gomma garantisce la protezione dell'alloggiamento degli accessori elettrici dagli agenti esterni.

GLOBE 500 CLASSIC

G50.B50 *



Dimensions and weight

Height: 630 mm
Diameter: 500 mm
Junction to support: diameter 60 mm
Weight: 3,6 Kg
Area exposed to wind pressure: CxS = m², 181

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal Smoked

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position



H.FC6 open
Downward position



E27-E40


*ADD. SUFFIX



Globe complete with classic base and **E27** or **E40** lampholder.

suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

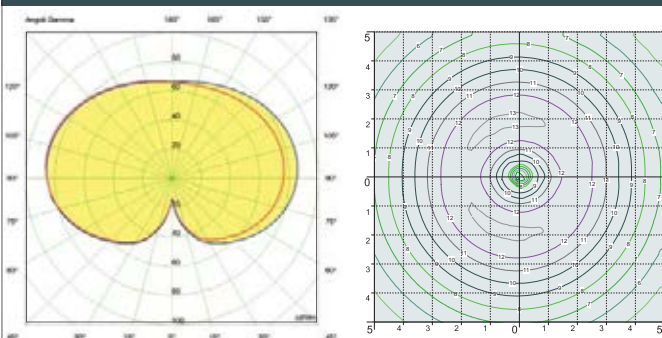

GLOBE 500 opal HQI 100.

POST height 4,5mt
10x10mt area: average 9 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THE ABOVE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES


GLOBE 500 CLASSIC

GRAND SIZE



G50.227





GIONA 5000/G500
G50.227

Pcs 1
Kg 63,6
mc 1,157

Ø 500

5500

400

GIONA 4000/G500	GIONA 4500/G500
G50.221	G50.224
Pcs 1 Kg 58,6 mc 0,907	Pcs 1 Kg 61,6 mc 1,027

Ø 500

5000
4500

400

KARMEI 3500/G500	KARMEI 4000/G500
G50.234	G50.237
Pcs 1 Kg 31,6 mc 0,447	Pcs 1 Kg 34,1 mc 0,498

Ø 500

4500
4000

Ø 275

SICHEM/G500
G50.121

Pcs 2
Kg 15,2
mc 0,275

Ø 500

1050

GLOBE 500 CLASSIC
G50.B50

Pcs 2
Kg 7,2
mc 0,275

Ø 500

630

Ø 60

TABOR/G500	HOREB/G500
G50.204	G50.207
Pcs 1 Kg 29,1 mc 0,407	Pcs 1 Kg 31,6 mc 0,447

Ø 500

4000
3500

Ø 275

KARMEI 3000/G500
G50.231

Pcs 1
Kg 29,1
mc 0,407

Ø 500

3500

Ø 275

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GIONA 4500-5000/GLOBE 500 CLASSIC

GRAND SIZE




G50.224.N10



G50.224.N40



MADE IN ITALY



GIONA 4500 ARON/G500 1L	GIONA 5000 ARON/G500 1L
G50.224.N10	G50.227.N10
Pcs 1 Kg 67,4 mc 1,031	Pcs 1 Kg 69,4 mc 1,146
1185	
5160 4660	
400	

ARON/G500
G50.172
Pcs 1 Kg 8,9 mc 0,178
1165
750
910
1165

LOT/G500
G50.113
Pcs 2 Kg 9 mc 0,275
800
Ø 500
Ø 190

GIONA 4500 ARON/G500 2L	GIONA 5000 ARON/G500 2L
G50.224.N20	G50.227.N20
Pcs 1 Kg 74 mc 1,115	Pcs 1 Kg 76 mc 1,239
2270	
5650 5150	

ERMON.R/G500
G50.195 resin
500
1490
Ø 275
Pcs 1 Kg 9,6 mc 0,212

GIONA 4500 ARON/G500 4L	GIONA 5000 ARON/G500 4L
G50.224.N40	G50.227.N40
Pcs 1 Kg 89 mc 1,282	Pcs 1 Kg 91 mc 1,425
2270	
5650 5150	

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

CANA 500

GRAND SIZE



PMMA amphora, complete with classic base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP65.

Anfora in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Base fornita con portalampada E27 e predisposta per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP65.



C50.B50.E27FC1



CANA 500 - COMPONENTS

IP65



Classic **AMPHORA** made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

***ANFORA** in stile classico in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.*

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

***FRANGILUCE** in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).*

BASE, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support and of a cover provided with E27 lampholder. A rubber gasket assures the protection of the electrical accessories seat against external agents.

***BASE** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalampana E27 (incluso). Una guarnizione in gomma garantisce la protezione dell'alloggiamento degli accessori elettrici dagli agenti esterni.*

CANA 500

C50.B50 *



Dimensions and weight

Height: 690 mm
Diameter: 400 mm
Junction to support: diameter 60 mm
Weight: 3,4 Kg
Area exposed to wind pressure:
CxS = m² 0,122

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position



E27-E40

*ADD. SUFFIX




Amphora complete with classic base and **E27** or **E40** lampholder.

suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

* ADD THE ABOVE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

PHOTOMETRIC DATA SAMPLE

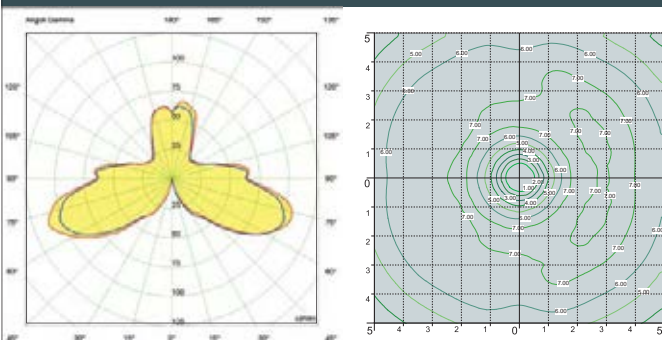

CANA 500 clear SON 70W (with louvre).

POST height 3,5mt
10 x 10mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

KARMEL 3500-4000/CANA 500

GRAND SIZE



C50.234.M21



C50.171



C50.234



MADE IN ITALY



LOT/CANA 500
C50.113

Pcs 1
Kg 4,3
mc 0,200

400
930
Ø 190

ADAM/CANA 500
C50.171

Pcs 1
Kg 4,9
mc 0,187

635
800

KARMEL 3500 ADAM/CANA 500 2L	KARMEL 4000 ADAM/CANA 500 2L
C50.234.M20	C50.237.M20
Pcs 1 Kg 38,1 mc 0,446	Pcs 1 Kg 40,6 mc 0,468

1300
4790
4290

2

KARMEL 3500/ CANA 500	KARMEL 4000/ CANA 500
C50.234	C50.237
Pcs 1 Kg 31,4 mc 0,320	Pcs 1 Kg 33,9 mc 0,371

400
4170
Ø 275

KARMEL 3500 ADAM/CANA 500 2+1	KARMEL 4000 ADAM/CANA 500 2+1
C50.234.M21	C50.237.M21
Pcs 1 Kg 41,5 mc 0,522	Pcs 1 Kg 44 mc 0,647

1300
4850
4350
Ø 275

2+1

KARMEL 3500 ADAM/CANA 500 3L	KARMEL 4000 ADAM/CANA 500 3L
C50.234.M30	C50.237.M30
Pcs 1 Kg 42,9 mc 0,579	Pcs 1 Kg 45,4 mc 0,584

1270
4790
4290
Ø 275

3

KARMEL 3500 ADAM/CANA 500 3+1	KARMEL 4000 ADAM/CANA 500 3+1
C50.234.M31	C50.237.M31
Pcs 1 Kg 46,3 mc 0,638	Pcs 1 Kg 48,8 mc 0,681

1270
4850
4350
Ø 275

3+1

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GIONA 4000/CANA 500

GRAND SIZE



C50.221

MADE IN ITALY



GIONA 4000/CANA 500
C50.221

Pcs 1
Kg 58,4
mc 0,780

4670

400

GIONA 4000 ADAM/CANA 500 3L
C50.221.M30

Pcs 1
Kg 69,9
mc 0,854

1270

4790

400

3

ERMON.R/CANA 500
C50.195 resin

400

1610

Ø 275

Pcs 1
Kg 9,4
mc 0,175

GIONA 4000 ADAM/CANA 500 2L
C50.221.M20

1300

4790

2

Pcs 1
Kg 64,9
mc 0,699

GIONA 4000 ADAM/CANA 500 2+1
C50.221.M21

1300

4850

2+1

Pcs 1
Kg 68,3
mc 0,745

GIONA 4000 ADAM/CANA 500 3+1
C50.221.M31

1270

4850

3+1

Pcs 1
Kg 73,3
mc 0,954



REFERENCES

LAMPS

POST

URBAN MODERN

URBAN CLASSIC

GARDEN

BULKHEAD

BOLLARD

FLOODLIGHT

BRICKLIGHT

IN-GROUND

DOWNLIGHT

UP&DOWN

COMPANY

URBAN MODERN

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GIORGIO-ROSA

FLOODLIGHT




Post top system complete with single or double luminaires made in in shockproof resin material, UV-rays stabilized, rust and corrosion-free. The provided bracket allows a fully adjustable floodlight position to direct the light emission. Supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with **2x E27 lampholders**. Insulation class II, Protection rating IP66.

*Sistema completo di diffusori per installazioni a palo con luce singola o doppia. Fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Il braccio in dotazione permette l'inclinazione e l'orientamento del proiettore per direzionare il flusso luminoso. Fornito con **incluse lampadine a LED GX53 con kelvin impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione **2x E27**. Classe di isolamento II, grado di protezione IP66.*



GIORGIO
4P2.000.G10
4P1.000.G10



ROSA
4P2.000.G20
4P1000.G20



4P2.000.G10




4P2.000.G20

CCT SETTABLE

SDCM <6

2700 K 3000 K 4000 K 6500 K

MADE IN ITALY




GIORGIO/ROSA - COMPONENTS

IP66



Square **FLOODLIGHT** with no visible screws made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with TÜV certified, long-life and efficient GX53 LED lamps included or provided with 2x E27 lampholders.

PROIETTORE quadro senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Provvisto di lampadine a LED GX53 approvate TÜV di lunga durata ed elevata efficienza o fornito nella versione 2x E27.



POST TOP SYSTEM with single or double bracket made in shockproof resin material, UV-rays stabilized. The provided bracket allows a fully adjustable position of the floodlight to direct at will the light emission.

SISTEMA A PALO con braccio singolo o doppio realizzato in resina antiurto, stabilizzata ai raggi UV. Il braccio permette l'orientamento in qualsiasi posizione del proiettore per poter direzionare il flusso luminoso.

GIORGIO

4P2.000.G10 *



Dimensions and weight

Height: 200 mm
Width: 420 mm
Weight: 4 Kg

ROSA

4P2.000.G20 *



Dimensions and weight

Height: 200 mm
Width: 700 mm
Weight: 6 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

4x GX53 LED

FULLY PRE-WIRED




4P2.702

Floodlight supplied with white resin reflective ceiling fully pre-wired and complete with 4 x TÜV-CB certified long-life efficient and Kelvin settable GX53 LED lamps included. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.


100 - 240 V

				*ADD. SUFFIX	
GX53 LED	4x 7W 28W	3200 Lm	6500 K	4000 K	.C4K
			3000 K		
	4x 10W 40W	4800 Lm	6500 K	4000 K	.D4K
			3000 K		



4x 10W = 100W
4800 Lm SON-HQI

SAVE 60%



GX53 LED

FULLY PRE-WIRED



4P1.702

Floodlight supplied fully pre-wired and complete with TÜV approved, long-life and efficient and Kelvin settable GX53 LED lamp in different wattages.

100 - 240 V

				*ADD. SUFFIX	
GX53 LED	7 W	800 Lm	6500 K	4000 K	.A1K
			2700 K		
			11 W		
	2700 K				
	18 W	2000 Lm	6500 K	4000 K	.E1K
			2700 K		
+ SENSOR			800 Lm		
	2700 K				
	11 W	1300 Lm		6500 K	4000 K
2700 K					
18 W			2000 Lm	6500 K	
	2700 K				



7W 11W 18W = 60W 100W 150W incandescent

SAVE 90%

2x E27

FULLY PRE-WIRED



4P2.702

Floodlight supplied fully pre-wired with white resin reflective ceiling and complete with 2x E27 lampholders.

Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

		*ADD. SUFFIX	
2x E27 (CFL-LED)	max 160 mm	↔	.E28
2x E27 + SENSOR	max 160 mm	↔	.ES8

LED LAMPS



Technical details on page 552.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GIORGIO-ROSA

FLOODLIGHT



4P2.414.G20



4P2.000




4P2.702



4P2.361.G10

MADE IN ITALY



GIORGIO	
11W	4P1.000.G10.B1K
18W	4P1.000.G10.E1K
28W	4P2.000.G10.C4K
40W	4P2.000.G10.D4K

CCT SETTABLE GX53 LED LAMP INCLUDED

Pcs 1
Kg 4
mc 0,029

2x E27 lampholder 4P2.000.G10.E28

ROSA	
2x 11W	4P1.000.G20.B1K
2x 18W	4P1.000.G20.E1K
2x 28W	4P2.000.G20.C4K
2x 40W	4P2.000.G20.D4K

CCT SETTABLE GX53 LED LAMP INCLUDED

Pcs 1
Kg 6
mc 0,049

2x E27 lampholder 4P2.000.G20.E28

GIOVA/GIUSEPPE	
11W	4P1.702.B1K
18W	4P1.702.E1K
28W	4P2.702.C4K
40W	4P2.702.D4K

CCT SETTABLE GX53 LED LAMP INCLUDED

Pcs 10
Kg 31
mc 0,195

2x E27 lampholder 4P2.702.E28

EKTOR 2500/ROSA
4P2.361.G20

Pcs 1
Kg 27
mc 0,181

EKTOR 4000/GIORGIO	AKILLE 4000/GIORGIO
4P2.371.G10	4P2.421.G10

Pcs 1
Kg 40
mc 0,240

EKTOR 3500/GIORGIO	AKILLE 3500/GIORGIO
4P2.367.G10	4P2.417.G10

Pcs 1
Kg 37
mc 0,214

EKTOR 3000/GIORGIO	AKILLE 3000/GIORGIO
4P2.364.G10	4P2.414.G10

Pcs 1
Kg 34
mc 0,188

EKTOR 2500/GIORGIO
4P2.361.G10

Pcs 1
Kg 24
mc 0,161

EKTOR 4000/ROSA	AKILLE 4000/ROSA
4P2.371.G20	4P2.421.G20

Pcs 1
Kg 43
mc 0,260

EKTOR 3500/ROSA	AKILLE 3500/ROSA
4P2.367.G20	4P2.417.G20

Pcs 1
Kg 40
mc 0,234

EKTOR 3000/ROSA	AKILLE 3000/ROSA
4P2.364.G20	4P2.414.G20

Pcs 1
Kg 37
mc 0,208

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 400 HIGH POWER LED

LARGE SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included.** Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP65.



V50.000.H1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY


VOLTAGE SURGE RESISTANT



DRIVER SILICONE PROTECTION







VIVI 400 HIGH POWER LED - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di **lampada a LED ad ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaires diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

VIVI 400 HIGH POWER LED

V50.000 *



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 4,2 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.



		100 - 240 V		*ADD. SUFFIX	
E27		30 W	3500 Lm	4000 K	.Q1L
				3000 K	.Q1R
E27		50 W	5300 Lm	4000 K	.H1L
				3000 K	.H1R

LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE - VIVI 400 HIGH POWER LED



SAVE -40%

HIGH POWER LED 50W
(power consumption)

Area: 10x10mt
Height: 3,5mt
28 lux

HQI 70W
power consumption = 84W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di sistema modulare a LED GX53 con kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.




V50.000.D6K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





VIVI 400 GX53 LED - COMPONENTS

IP65



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.



Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

VIVI 400 GX53 LED

V50.000 *



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 4,9 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


		100 - 240 V		*ADD. SUFFIX
	6x 7W 42W	4800 Lm	6500 K 4000 K 3000 K	.C6K
	6x 10W 60W	7200 Lm	6500 K 4000 K 3000 K	.D6K

LED LAMPS





Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE - VIVI 400 GX53 LED



SAVE -48%

6x10W GX53 LED 60W
(power consumption)

Area: 10x10mt
Height: 3,5mt
37 lux

HQI 100W
power consumption = 112W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 400 E27

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP65.


Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.



V50.000.E27


RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL	POST
				HANGING

MADE IN ITALY



VIVI 400 E27 - E40 - COMPONENTS

IP65

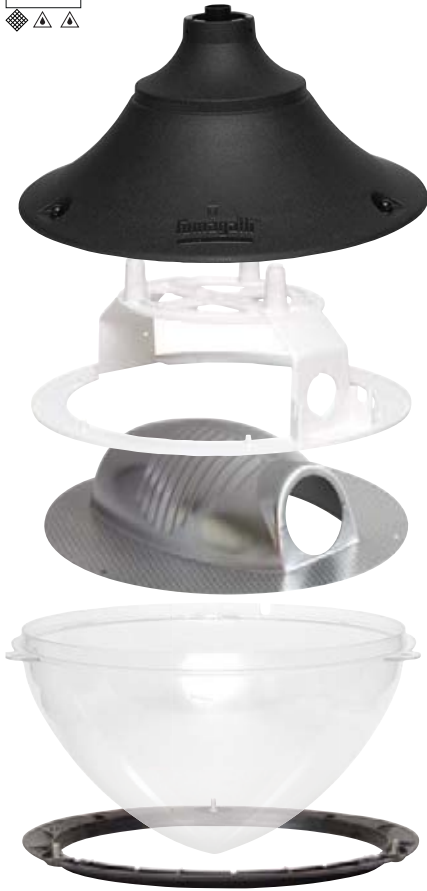

ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.



Dimensions and weight
Height: 420 mm
Diameter: 480 mm
Weight: 3,7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:
Black White Grey
Diffuser PMMA:
Clear Opal

E27-E40



*ADD. SUFFIX



suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

Luminaries supplied with E27 or E40 lampholder.

PHOTOMETRIC DATA SAMPLE




VIVI 400 E27 clear HQI 70W.

POST height 4mt
10x10mt area: average 28 lux

The photometric data for all the versions are available upon request or on our website.

HORIZONTAL BULB

AGAINST LIGHT POLLUTION



E27 - E40 VERSION


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

VIVI 400

LARGE SIZE



MADE IN ITALY



LUIGI 400-DR
L41.128

Pcs 1
Kg 4,2
mc 0,09

*rope not included

NEW LOT/VIVI400
V50.115

Pcs 1
Kg 5,2
mc 0,071

VIVI 400
V50.000

Pcs 1
Kg 4,9
mc 0,09

MIDIPIALAR/VIVI400
V50.254

Pcs 1
Kg 5,5
mc 0,092

MARIO/VIVI400
V50.129

Pcs 1
Kg 5,2
mc 0,07

*rope not included

EKTOR 4000 MIDIPIALAR/VIVI400 1L	AKILLE 4000 MIDIPIALAR/VIVI400 1L
V50.371.A10	V50.421.A10
Pcs 1 Kg 41 mc 0,314	

EKTOR 3500 MIDIPIALAR/VIVI400 1L	AKILLE 3500 MIDIPIALAR/VIVI400 1L
V50.367.A10	V50.417.A10
Pcs 1 Kg 37,5 mc 0,284	

EKTOR 2500 MIDIPIALAR/VIVI400 1L
V50.361.A10

Pcs 1
Kg 30,6
mc 0,235

Ø 265

EKTOR 3000 MIDIPIALAR/VIVI400 1L	AKILLE 3000 MIDIPIALAR/VIVI400 1L
V50.364.A10	V50.414.A10
Pcs 1 Kg 34 mc 0,262	

Ø 265

Ø 265


COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

VIVI 400

LARGE SIZE



MADE IN ITALY



EKTOR 2500 MIDIPILAR/VIVI400 3L
V50.361.A30

Pcs 1
Kg 42
mc 0,497

1135

2755

Ø 265

EKTOR 2500 MIDIPILAR/VIVI400 2L
V50.361.A20

Pcs 1
Kg 86,2
mc 0,306

1220

2755

Ø 265

EKTOR 4000 MIDIPILAR/VIVI400 2L V50.371.A20	AKILLE 4000 MIDIPILAR/VIVI400 2L V50.421.A20
Pcs 1 Kg 46,5 mc 0,385	
EKTOR 3500 MIDIPILAR/VIVI400 2L V50.367.A20	AKILLE 3500 MIDIPILAR/VIVI400 2L V50.417.A20
Pcs 1 Kg 43 mc 0,358	
EKTOR 3000 MIDIPILAR/VIVI400 2L V50.364.A20	AKILLE 3000 MIDIPILAR/VIVI400 2L V50.414.A20
Pcs 1 Kg 39,6 mc 0,332	

1220

4255
3755
3255

EKTOR3000 AKILLE4000

Ø 265

EKTOR 4000 MIDIPILAR/VIVI400 3L V50.371.A30	AKILLE 4000 MIDIPILAR/VIVI400 3L V50.421.A30
Pcs 1 Kg 52 mc 0,576	
EKTOR 3500 MIDIPILAR/VIVI400 3L V50.367.A30	AKILLE 3500 MIDIPILAR/VIVI400 3L V50.417.A30
Pcs 1 Kg 48,6 mc 0,55	
EKTOR 3000 MIDIPILAR/VIVI400 3L V50.364.A30	AKILLE 3000 MIDIPILAR/VIVI400 3L V50.414.A30
Pcs 1 Kg 45,2 mc 0,523	

1135

4255
3755
3255

EKTOR4000 AKILLE3000

Ø 265

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ECOVIVI 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP65.




EV4.000.C6K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





ECOVIVI 400 GX53 LED - COMPONENTS

IP65



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.



Decorative connection **RING** to be fixed on the luminaries diffuser.



ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

ECOVIVI 400 GX53 LED

EV.4.000 *



Dimensions and weight

Height: 243 mm
Diameter: 480 mm
Weight: 4,6 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


		100 - 240 V		*ADD. SUFFIX	
GX53 LED	6x 7W 42W	4800 Lm	6500 K 4000 K 3000 K	.C6K	
	6x 10W 60W	7200 Lm	6500 K 4000 K 3000 K	.D6K	

LED LAMPS





Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE - ECOVIVI 400 GX53 LED



SAVE -48%

6x10W GX53 LED
60W
(power consumption)

Area: 10x10mt
Height: 3,5mt
37 lux



HQI 100W
power consumption = 112W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ECOVIVI 400 E27

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 - Installation area: Zone 1). Insulation class II, Protection rating IP65.


Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 - Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP65.



EV4.000.E27

RECYCLABLE	ANTISHOCK	TEMPERATURE	WALL	POST
				HANGING





ECOVIVI 400 E27 - E40 - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in polycarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalamпада E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in polycarbonato (PC) stabilizzato ai raggi UV.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

ECOVIVI 400 E27

EV4.000 *



Dimensions and weight

Height: 243 mm
Diameter: 480 mm
Weight: 3,4 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

E27-E40



*ADD. SUFFIX



Luminaries supplied with E27 or E40 lampholder. Metal plate for ballast fixation available as an option (H.BAL.PLT)

suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE




ECOVIVI 400 clear HQI 70W.

POST height 3,5mt
10x10mt area: average 28 lux

The photometric data for all the versions are available upon request or on our website.

HORIZONTAL BULB

AGAINST LIGHT POLLUTION




E27 - E40 VERSION

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ECOVIVI 400

LARGE SIZE





LUIGI 400
L4F.128

Pcs 1
Kg 3,7
mc 0,09

*rope not included

NEW LOT/ECOVIVI400
EV4.115

Pcs 1
Kg 4,9
mc 0,071

ECOVIVI 400
EV4.000

Pcs 1
Kg 4,6
mc 0,09

MIDIPILAR/ECOVIVI400
EV4.254

Pcs 1
Kg 5,2
mc 0,092

MARIO/ECOVIVI400
EV4.129

Pcs 1
Kg 4,9
mc 0,07

*rope not included

EKTOR 4000 MIDIPILAR/ECOVIVI400 1L EV4.371.A10	AKILLE 4000 MIDIPILAR/ECOVIVI400 1L EV4.421.A10
Pcs 1 Kg 40,5 mc 0,314	
EKTOR 3500 MIDIPILAR/ECOVIVI400 1L EV4.367.A10	AKILLE 3500 MIDIPILAR/ECOVIVI400 1L EV4.417.A10
Pcs 1 Kg 37,1 mc 0,284	

EKTOR 2500 MIDIPILAR/ECOVIVI400 1L
EV4.361.A10

Pcs 1
Kg 30,3
mc 0,235

Ø 265

EKTOR 3000 MIDIPILAR/ ECOVIVI400 1L EV4.364.A10	AKILLE 3000 MIDIPILAR/ ECOVIVI400 1L EV4.414.A10
Pcs 1 Kg 33,7 mc 0,262	

Pcs 1
Kg 33,7
mc 0,262

Ø 265

Ø 265


COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

ECOVIVI 400

LARGE SIZE



MADE IN
ITALY



EKTOR 2500 MIDIPILAR/ECOVIVI400 3L
EV4.361.A30

Pcs 1
Kg 41
mc 0,497

EKTOR 2500 MIDIPILAR/ECOVIVI400 2L
EV4.361.A20

Pcs 1
Kg 35,7
mc 0,306

Ø 265

EKTOR 4000 MIDIPILAR/ECOVIVI400 2L	AKILLE 4000 MIDIPILAR/ECOVIVI400 2L
EV4.371.A20	EV4.421.A20
Pcs 1 Kg 46 mc 0,385	
EKTOR 3500 MIDIPILAR/ECOVIVI400 2L	AKILLE 3500 MIDIPILAR/ECOVIVI400 2L
EV4.367.A20	EV4.417.A20
Pcs 1 Kg 42,5 mc 0,358	
EKTOR 3000 MIDIPILAR/ECOVIVI400 2L	AKILLE 3000 MIDIPILAR/ECOVIVI400 2L
EV4.364.A20	EV4.414.A20
Pcs 1 Kg 39,1 mc 0,332	

EKTOR3000 AKILLE4000

Ø 265

EKTOR 4000 MIDIPILAR/ECOVIVI400 3L	AKILLE 4000 MIDIPILAR/ECOVIVI400 3L
EV4.371.A30	EV4.421.A30
Pcs 1 Kg 51,1 mc 0,576	
EKTOR 3500 MIDIPILAR/ECOVIVI400 3L	AKILLE 3500 MIDIPILAR/ECOVIVI400 3L
EV4.367.A30	EV4.417.A30
Pcs 1 Kg 47,7 mc 0,55	
EKTOR 3000 MIDIPILAR/ECOVIVI400 3L	AKILLE 3000 MIDIPILAR/ECOVIVI400 3L
EV4.364.A30	EV4.414.A30
Pcs 1 Kg 44,3 mc 0,523	

EKTOR4000 AKILLE3000

Ø 265

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BEPPE 400 HIGH POWER LED

LARGE SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included.** Insulation class II, Protection rating IP65.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP65.*



P50.000.H1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE


+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION





BEPPE 400 HIGH POWER LED - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad **ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

BEPPE 400 HIGH POWER LED

P50.000 *



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 4 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PMMA:



Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.



		100 - 240 V		*ADD, SUFFIX	
E27		30 W	3500 Lm	4000 K	.Q1L
				3000 K	.Q1R
E27		50 W	5300 Lm	4000 K	.H1L
				3000 K	.H1R


LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE - BEPPE 400 HIGH POWER LED






SAVE -40%

HIGH POWER LED 50W
(power consumption)

Area: 10x10mt
Height: 3,5mt
21 lux

=



HQI 70W
power consumption =84W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BEPPE 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Equipped with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED modular system in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.

P50.000.D6K




CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

UV TREATED DOUBLE INSULATION PUBLIC ZONE 2 RECYCLABLE ANTISHOCK TEMPERATURE POST



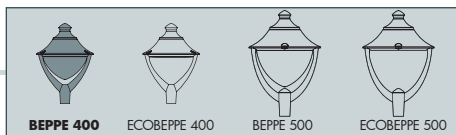

BEPPE 400 GX53 LED - COMPONENTS



IP65



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

BEPPE 400 GX53 LED

P50.000 *



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 5 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PMMA:


Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

		100 - 240 V		*ADD. SUFFIX
	6x 7W 42W	4800 Lm	6500 K 4000 K 3000 K	.C6K
	6x 10W 60W	7200 Lm	6500 K 4000 K 3000 K	.D6K

LED LAMPS




Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE - BEPPE 400 GX53 LED

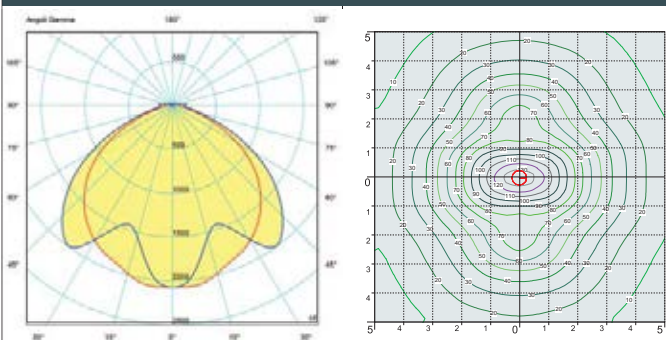

SAVE -50%

6x10W GX53 LED 60W
(power consumption)

Area: 10x10mt
Height: 4mt
34 lux

HQI 100W
power consumption = 112W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BEPPE 400 E27

LARGE SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.



P50.000.E27





BEPPE 400 E27 - E40 - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalamпада E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 3,7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

E27-E40



*ADD. SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE



BEPPE 400 clear HQI 70W.

POST height 3,5mt
10x10mt area: average 20 lux


The photometric data for all the versions are available upon request or on our website.

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

BEPPE 400

LARGE SIZE





NEW LOT/BEPPE400
P50.115

Pcs 1
Kg 5,3
mc 0,119

BEPPE400
P50.000

Pcs 1
Kg 5
mc 0,113

EKTOR 2500/BEPPE400
P50.361.000

Pcs 1
Kg 29,3
mc 0,256

EKTOR 3000/ BEPPE400	AKILLE 3000/ BEPPE400
P50.364.000	P50.414.000
Pcs 1 Kg 32,7 mc 0,282	

EKTOR 3500/ BEPPE400	AKILLE 3500/ BEPPE400
P50.367.000	P50.417.000
Pcs 1 Kg 36,1 mc 0,309	

EKTOR 4000/ BEPPE400	AKILLE 4000/ BEPPE400
P50.371.000	P50.421.000
Pcs 1 Kg 39,5 mc 0,335	

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ECOBEPPE 400 GX53 LED

LARGE SIZE



Modern luminaries made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP65.




EP5.000.D6K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





ECOBEPPE 400 GX53 LED - COMPONENTS

IP65



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

ECOBEPPE 400 GX53 LED

EP5.000 *



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 4,7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


		100 - 240 V		*ADD. SUFFIX
	6x 7W 42W	4800 Lm	6500 K 4000 K 3000 K	.C6K
	6x 10W 60W	7200 Lm	6500 K 4000 K 3000 K	.D6K

LED LAMPS





Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE - ECOBEPPE 400 GX53 LED



SAVE -50%

6x7W GX53 LED 42W
(power consumption)

Area: 10x10mt
Height: 3,5mt
20 lux

HQI 70W
power consumption = 84W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ECOBEPPE 400 E27

LARGE SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 – Intallation area: Zone 1). Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP65.



EP5.000.E27





ECOBEPPE 400 E27 - E40 - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalamпада E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.



Dimensions and weight

Height: 420 mm
Diameter: 480 mm
Weight: 3,4 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1449

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

E27-E40



*ADD SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE



ECOBEPPE 400 clear HQI 70W.

POST height 3,5mt
10x10mt area: average 20 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

ECOBEPPE 400

LARGE SIZE



EP5.367.D6K




EP5.115.D6K



EP5.417.D6K



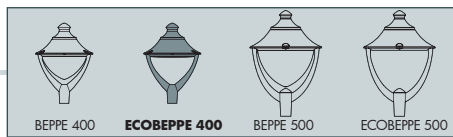

NEW LOT/ECOBEPPE400
EP5.115

Pcs 1
Kg 5
mc 0,119

ECOBEPPE400
EP5.000

Pcs 1
Kg 4,7
mc 0,113

EKTOR 2500/ECOBEPPE400
EP5.361.000

Pcs 1
Kg 29,3
mc 0,256

EKTOR 3000/ECOBEPPE400	AKILLE 3000/ECOBEPPE400
EP5.364.000	EP5.414.000
Pcs 1 Kg 32,7 mc 0,282	

EKTOR 3500/ECOBEPPE400	AKILLE 3500/ECOBEPPE400
EP5.367.000	EP5.417.000
Pcs 1 Kg 36,1 mc 0,309	

EKTOR 4000/ECOBEPPE400	AKILLE 4000/ECOBEPPE400
EP5.371.000	EP5.421.000
Pcs 1 Kg 39,5 mc 0,335	

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 400 HIGH POWER LED

LARGE SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP65.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP65.*



R50.000.Q1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE


+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

MADE IN ITALY



REMO 400 HIGH POWER LED - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad **ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

BASE made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation. A rubber gasket assures the protection against external agents.

BASE dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sui cui viene fissato il diffusore interno. Una guarnizione in gomma garantisce la protezione dagli agenti esterni.

REMO 400 GX53 LED



Dimensions and weight

Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:

Black White Grey

Diffuser PMMA:



Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaires equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaires maintenance very simple.


		100 - 240 V		*ADD SUFFIX	
E27		30 W	3500 Lm	4000 K	.Q1L
				3000 K	.Q1R
E27		50 W	5300 Lm	4000 K	.H1L
				3000 K	.H1R

LED LAMPS






Technical details on page 552.

DOWNWARD LIGHT EMISSION



PHOTOMETRIC DATA SAMPLE - REMO 400 HIGH POWER LED






SAVE -56%

HIGH POWER LED 50W
(power consumption)

Area: 10x10mt
Height: 3,5mt
11 lux

=



HQI 100W
power consumption = 115W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED modular system in different wattages. Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Classe di isolamento II, grado di protezione IP65.




R50.000.D6K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





REMO 400 GX53 LED - COMPONENTS

IP65



ROOF complete with decorative pinnacle made in shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin **CONE REFLECTOR**, to direct downwards the lighting output. A silicone rubber gasket assures the protection against external agents.

BASE dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un **CONO** riflettente in resina bianca per indirizzare verso il basso il flusso luminoso. Una guarnizione in gomma silconica garantisce la protezione dagli agenti esterni.

REMO 400 GX53 LED

R50.000 *



Dimensions and weight

Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:

Black White Grey

Diffuser PMMA:


Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

		100 - 240 V		*ADD. SUFFIX
	6x 7W 42W	4800 Lm	6500 K 4000 K 3000 K	.C6K
	6x 10W 60W	7200 Lm	6500 K 4000 K 3000 K	.D6K

LED LAMPS





Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE - REMO 400 GX53 LED

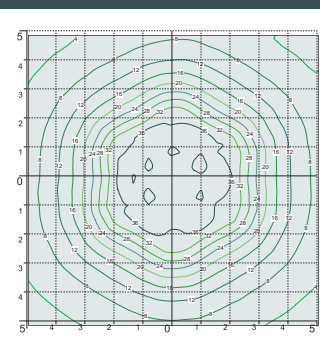

SAVE -63%

6x7W GX53 LED 42W
(power consumption)

Area: 10x10mt
Height: 3,5mt
17 lux

HQI 100W
power consumption = 115W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 400 E27

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP65.


Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP65.



R50.000.E27FC6

RECYCLABLE	ANTISHOCK	TEMPERATURE	WALL POST





REMO 400 E27 - E40 - COMPONENTS

IP65



ROOF complete with decorative pinnacle made in shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA riflettente realizzata in alluminio anodizzato, fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Resin **BASE** consisting of a support (Ø 60mm) and of a cover provided with E27 or E40 lampholder on its upper side. A rubber gasket assures the protection against external agents.

BASE in resina composta da un supporto e da un coperchio nella cui parte superiore si trova l'alloggiamento per il portalampada E27 o E40 (incluso). Una guarnizione in gomma ne garantisce la protezione dagli agenti esterni.



REMO 400 E27
R50.000 *
Height: 715 mm
Diameter: 480 mm
Weight: 4,2 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:
Black White Grey
Diffuser PMMA:
Clear Opal



E27-E40		*ADD. SUFFIX	
	suitable lamps: CFL-LED max 50W	E27 Lampholder only	.E27
		E40 Lampholder only	.E40
Luminaries supplied with E27 or E40 lampholder.			


PHOTOMETRIC DATA SAMPLE	
	<p>REMO 400 clear E27 High Power LED 60W.</p> <p>POST height 3,5mt 10x10mt area: average 15 lux</p> <p>The photometric data for all the versions are available upon request or on our website.</p>

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

REMO 400

LARGE SIZE





MIDIPILAR/REMO400
R50.254

Pcs 1
Kg 6,4
mc 0,09

NEW LOT/REMO400
R50.115

Pcs 1
Kg 6,1
mc 0,07

REMO400
R50.000

Pcs 1
Kg 5,8
mc 0,06

EKTOR 2500/REMO400
R50.361.000

Pcs 1
Kg 30,1
mc 0,21

Ø 265

EKTOR 3000/REMO400 **AKILLE 3000/REMO400**
R50.364.000 R50.414.000

Pcs 1
Kg 33,5
mc 0,241

Ø 265

EKTOR 3500/REMO400 **AKILLE 3500/REMO400**
R50.367.000 R50.417.000

Pcs 1
Kg 26,9
mc 0,268

Ø 265

EKTOR 4000/REMO400 **AKILLE 4000/REMO400**
R50.371.000 R50.421.000

Pcs 1
Kg 40,3
mc 0,294

Ø 265

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 400 HIGH POWER LED

LARGE SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito completo di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP65.



F50.000.Q1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500

CE UV CLASS II

UV TREATED DOUBLE INSULATION


PUBLIC

RECYCLABLE ANTI-SHOCK TEMPERATURE

+90° -60°

WALL POST





GINO 400 HIGH POWER LED - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.

BASE made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation. A rubber gasket assures the protection against external agents.

BASE dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sui cui viene fissato il diffusore interno. Una guarnizione in gomma garantisce la protezione dagli agenti esterni.

GINO 400 HIGH POWER LED

F50.000 *



Dimensions and weight

Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:

Black White Grey

Diffuser PMMA:



Clear Opal

HIGH POWER LED




- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient E27 high power LED lamp, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.


		100 - 240 V		*ADD SUFFIX	
E27		30 W	3500 Lm	4000 K	.Q1L
				3000 K	.Q1R
E27		50 W	5300 Lm	4000 K	.H1L
				3000 K	.H1R

LED LAMPS





Technical details on page 552.

DOWNWARD LIGHT EMISSION

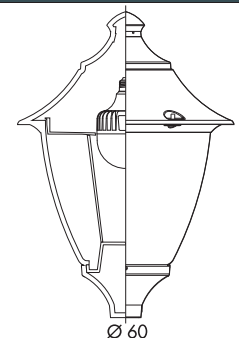

Ø 60

PHOTOMETRIC DATA SAMPLE - GINO 400 HIGH POWER LED



SAVE **-56%**

HIGH POWER LED 50W
(power consumption)

Area: 10x10mt
Height: 3,5mt
11 lux

=

HQI 100W
power consumption = 115W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Insulation class II, Protection rating IP65.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Classe di isolamento II, grado di protezione IP65.*

F50.000.D6K




CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL POST





GINO 400 GX53 LED - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin **CONE REFLECTOR**, to direct downwards the lighting output. A silicone rubber gasket assures the protection against external agents.

BASE dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un **CONO** riflettente in resina bianca per indirizzare verso il basso il flusso luminoso. Una guarnizione in gomma siliconica garantisce la protezione dagli agenti esterni.

GINO 400 GX53 LED

F50.000 *



Dimensions and weight

Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,157

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6X TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

		100 - 240 V		*ADD. SUFFIX	
	6x 7W 42W	4800 Lm	6500 K	.C6K	
			4000 K		
	6x 10W 60W	7200 Lm	6500 K	.D6K	
			4000 K		
			3000 K		

LED LAMPS


LVD EMC ERP 6000h

Technical details on page 552.

CCT SETTABLE LED LAMP

CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE - GINO 400 GX53 LED

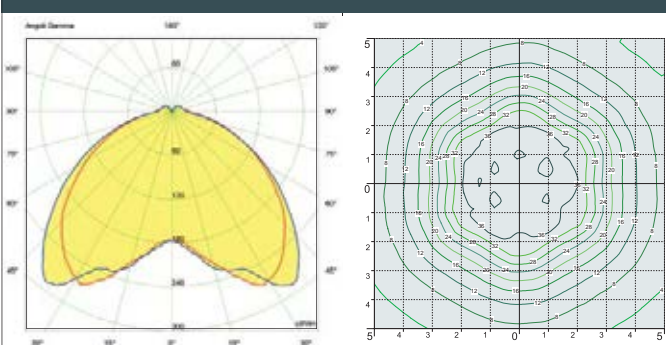

SAVE -63%

6x7W GX53 LED
42W
(power consumption)

Area: 10x10mt
Height: 3,5mt
17 lux

HQI 100W
power consumption = 115W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 400 E27

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP65.


Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP65.



F50.000.E27FC6

RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL POST





GINO 400 E27 - E40 - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA riflettente realizzata in alluminio anodizzato fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).


Resin **BASE** consisting of a support (Ø 60mm) and of a cover provided with E27 or E40 lampholder on its upper side. A rubber gasket assures the protection of the electrical accessories seat against external agents.

BASE in resina composta da un supporto e da un coperchio nella cui parte superiore si trova l'alloggiamento per il portalampada E27 o E40 (incluso). Una guarnizione in gomma ne garantisce la protezione dagli agenti esterni.



Dimensions and weight
Height: 715 mm
Diameter: 480 mm
Weight: 4,2 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:
Black White Grey
Diffuser PMMA:
Clear Opal

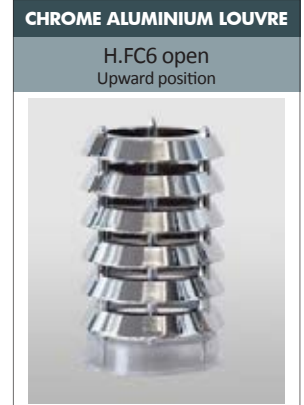

E27-E40


*ADD SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED max 50W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

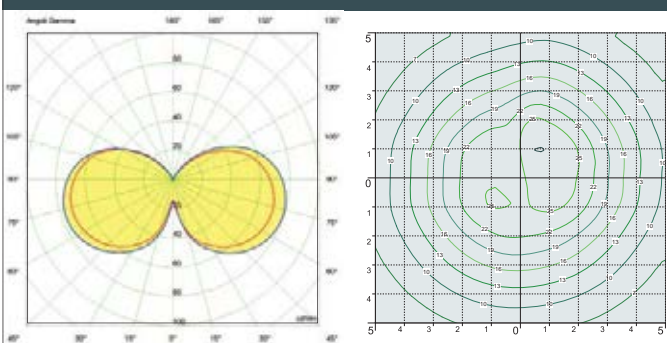

GINO 400 clear clear E27 High Power LED 60W.

POST height 3,5mt
10x10mt area: average 15 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE


COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GINO 400

LARGE SIZE



MADE IN ITALY



MIDIPILAR/GINO400
F50.254

Pcs 1
Kg 6,4
mc 0,09

NEW LOT/GINO400
F50.115

Pcs 1
Kg 6,1
mc 0,07

GINO400
F50.000

Pcs 1
Kg 5,8
mc 0,06

EKTOR 2500/GINO400
F50.361.000

Pcs 1
Kg 30,1
mc 0,21

EKTOR 3000/GINO400	AKILLE 3000/GINO400
F50.364.000	F50.414.000
Pcs 1 Kg 33,5 mc 0,24	

EKTOR 3500/GINO400	AKILLE 3500/GINO400
F50.367.000	F50.417.000
Pcs 1 Kg 26,9 mc 0,26	

EKTOR 4000/GINO400	AKILLE 4000/GINO400
F50.371.000	F50.421.000
Pcs 1 Kg 40,3 mc 0,29	

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 500 HIGH POWER LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di lampada a LED E27 ad ALTA POTENZA, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP65.



V60.000.W1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE


+80°C
-30°C

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION





VIVI 500 HIGH POWER LED - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad **ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaires diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

VIVI 500 HIGH POWER LED

V60.000 *

Ø 60



Dimensions and weight

Height: 600 mm
Diameter: 600 mm
Weight: 7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure: CxS = m² 0,1932

Moulded colours:

Black White Grey

Diffuser PMMA:



Clear Opal

HIGH POWER LED




- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaires equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaires maintenance very simple.

100 - 240 V			*ADD. SUFFIX	
E27 	50 W	5300 Lm	4000 K	.H1L
			3000 K	.H1R
E27 	60 W	7000 Lm	4000 K	.W1L
			3000 K	.W1R



LED LAMPS




LVD EMC ERP 6000h

Technical details on page 552.

PHOTOMETRIC DATA SAMPLE - VIVI 500 HIGH POWER LED






SAVE -47%

HIGH POWER LED 60W
(power consumption)

Area: 10x10mt
Height: 5m
27 lux

=



HQI 100W
power consumption = 115W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 500 GX53 LED

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP65.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.*




V60.000.D9K

CCT SETTABLE

SDCM <6

3000 K 4000 K 6500 K

MADE IN ITALY



VIVI 500 GX53 LED - COMPONENTS

IP65



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.



Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

VIVI 500 GX53 LED

V60.000 *



Dimensions and weight

Height: 600 mm
Diameter: 600 mm
Weight: 7,7 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,1932

Moulded colours:



Diffuser PMMA:



GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 9x TÜV-CB certified, long-life, efficient and Kelvin settable **GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


		100 - 240 V		*ADD. SUFFIX
	9x 7W 63W	7200 Lm	6500 K 4000 K 3000 K	.C9K
	9x 10W 90W	10800 Lm	6500 K 4000 K 3000 K	.D9K

LED LAMPS





Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE - VIVI 500 GX53 LED



SAVE -45%

9x10W GX53 LED 90W
(power consumption)

Area: 10x10mt
Height: 5mt
34 lux

HQI 150W
power consumption = 165W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

VIVI 500 E27

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.



V60.000.E27

MADE IN ITALY



VIVI 500 E27 - E40 - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalamпада E27 o E40 atto a sostenere la lampadina in posizione orizzontale.



Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.



Dimensions and weight

Height: 600 mm
Diameter: 600 mm
Weight: 6 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,1932

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

E27-E40

*ADD. SUFFIX



suitable lamps:

CFL-LED

SON-HQI

max 150W

E27

Lampholder only

.E27

E40


Lampholder only

.E40

Luminaries supplied with E27 or E40 lampholder.


HORIZONTAL BULB

AGAINST LIGHT POLLUTION



E27 - E40 VERSION

PHOTOMETRIC DATA SAMPLE

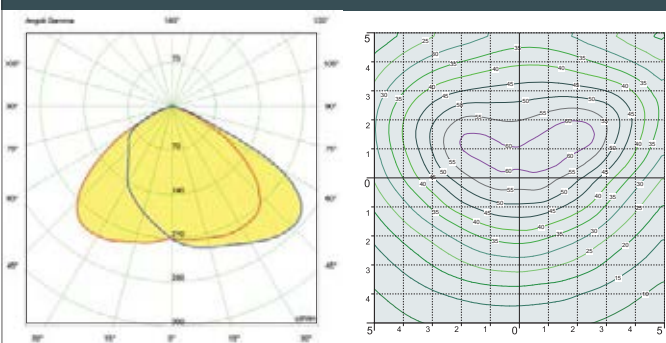

VIVI 500 clear HQI 150W.

POST height 5mt
10x10mt area: average 35 lux


The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

VIVI 500

GRAND SIZE

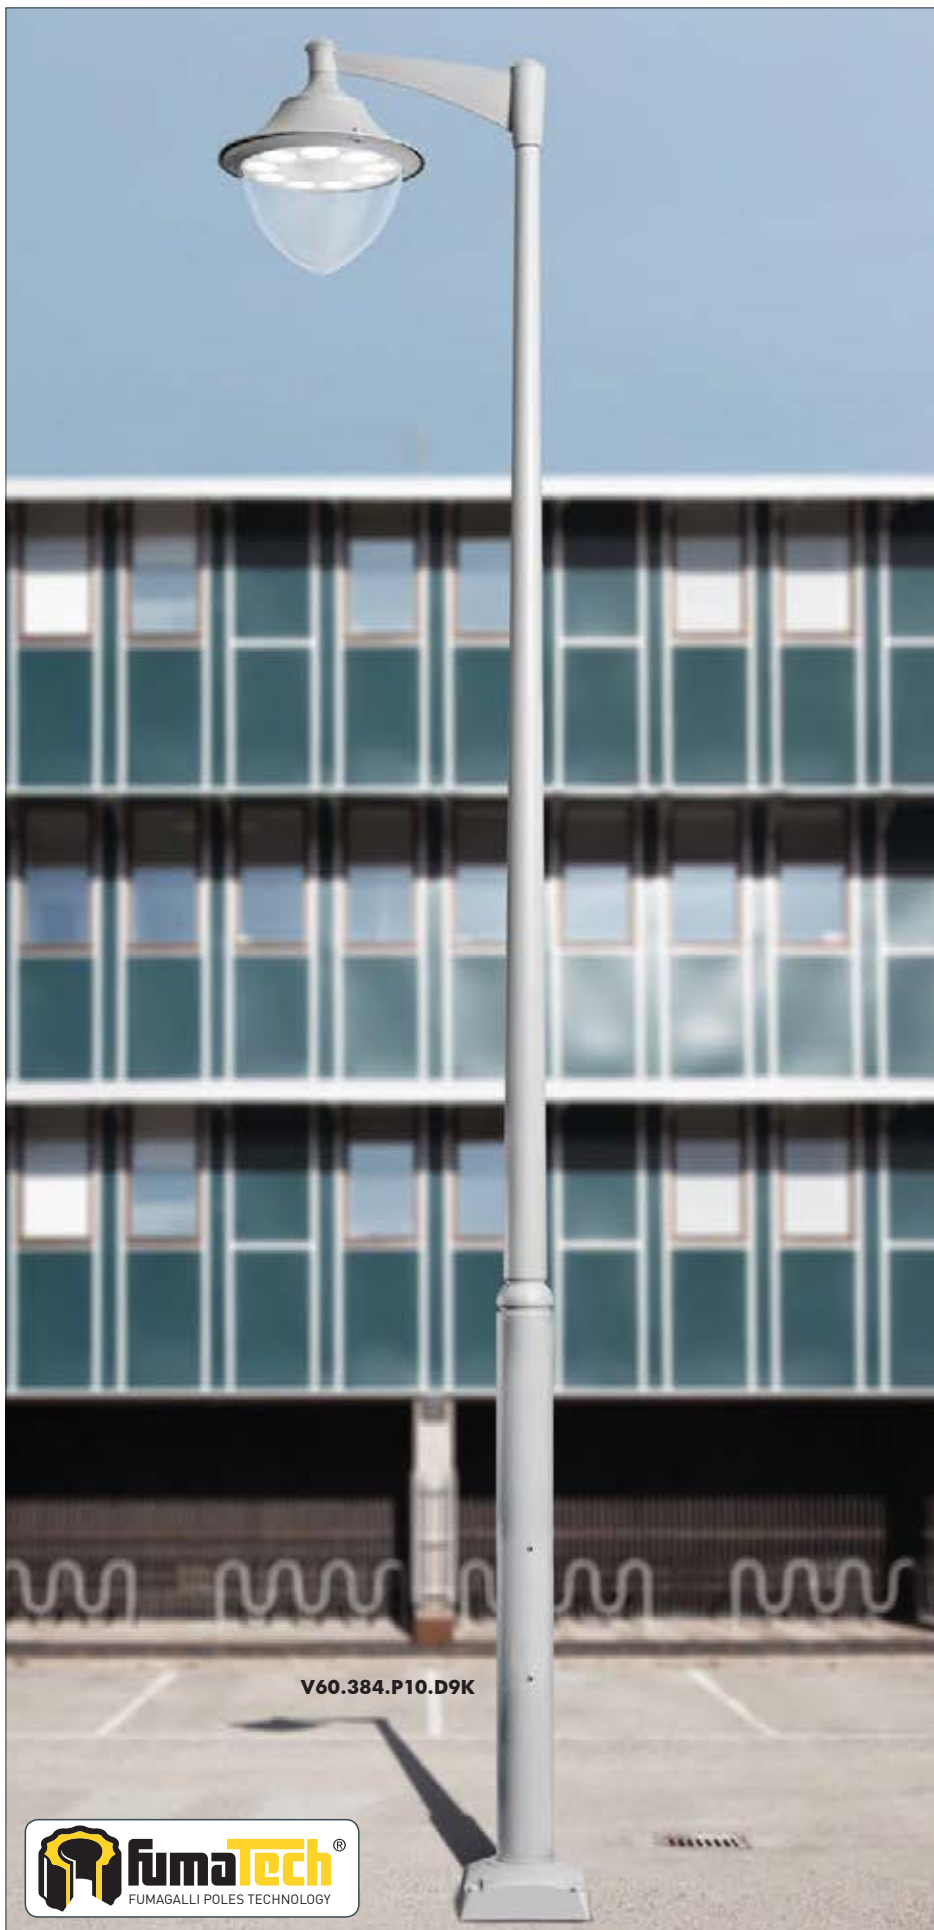

V60.384.P10.D9K



L51.128.W1L




V60.253



V60.129.D9K

MADE IN ITALY



VIVI 500
V60.000

Ø 600
600

Pcs 1
Kg 7,7
mc 0,10

LUIGI 500-DR
L51.128

680
600

Pcs 1
Kg 7,7
mc 0,10

*rope not included

PILAR/VIVI500
V60.253

920
650

Pcs 1
Kg 9,7
mc 0,15

NEW LOT/VIVI500
V60.115

600
710

Pcs 1
Kg 8,7
mc 0,13

MARIO/VIVI500
V60.129

600
600

Pcs 1
Kg 7,1
mc 0,11

*rope not included

EKTOR 6000 PILAR/VIVI500 2L
V60.384.P20

1800
6220

Pcs 1
Kg 94,6
mc 1,46

400

EKTOR 6000 PILAR/VIVI500 1L
V60.384.P10

1030
6220


Pcs 1
Kg 86,2
mc 1,36

400

VIVI 500

GRAND SIZE





EKTOR 5000 PILAR/VIVI500 1L V60.377.P10	AKILLE 5000 PILAR/VIVI500 1L V60.427.P10
Pcs 1 Kg 55,7 mc 0,43	
EKTOR 4500 PILAR/VIVI500 1L V60.374.P10	AKILLE 4500 PILAR/VIVI500 1L V60.424.P10
Pcs 1 Kg 50,2 mc 0,40	
EKTOR 4000 PILAR/VIVI500 1L V60.371.P10	AKILLE 4000 PILAR/VIVI500 1L V60.421.P10
Pcs 1 Kg 44,7 mc 0,37	

EKTOR 5000 PILAR/VIVI500 2L V60.377.P20	AKILLE 5000 PILAR/VIVI500 2L V60.427.P20
Pcs 1 Kg 65,1 mc 0,60	
EKTOR 4500 PILAR/VIVI500 2L V60.374.P20	AKILLE 4500 PILAR/VIVI500 2L V60.424.P20
Pcs 1 Kg 59,6 mc 0,57	
EKTOR 4000 PILAR/VIVI500 2L V60.371.P20	AKILLE 4000 PILAR/VIVI500 2L V60.421.P20
Pcs 1 Kg 54,1 mc 0,54	

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ECOVIVI 500 GX53 LED

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP65.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV -CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP65.*



EV6.000.D9K


CCT SETTABLE

3000 K
 4000 K
 6500 K

SDCM < 6

	UV TREATED	CLASS II	PUBLIC	ZONE 1
		DOUBLE INSULATION +90° -60°		





ECOVIVI 500 GX53 LED - COMPONENTS

IP65



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in polycarbonato (PC), stabilizzato ai raggi UV.



Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.



ECOVIVI 500 GX53 LED

EV6.000 *



Dimensions and weight

Height: 300 mm
Diameter: 600 mm
Weight: 6,7 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,0982

Moulded colours:

Black White Grey
Diffuser PC (UV treated):
Clear

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 9x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


100 - 240 V			*ADD. SUFFIX
	9x 7W 63W	7200 Lm	6500 K 4000 K 3000 K .C9K
	9x 10W 90W	10800 Lm	6500 K 4000 K 3000 K .D9K

LED LAMPS





Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE - ECOVIVI 500 GX53 LED



SAVE -45%

9x10W GX53 LED 90W
(power consumption)

Area: 10x10mt
Height: 5mt
38 lux

HQI 150W
power consumption = 165W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ECOVIVI 500 E27

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 - Installation area: Zone 1). Insulation class II, Protection rating IP65.


Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 - Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP65.



EV6.000.E27

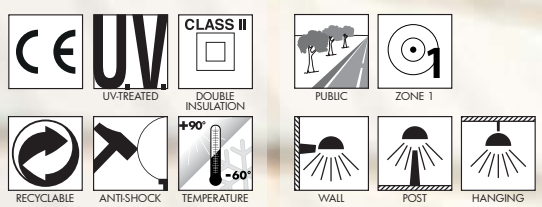

MADE IN ITALY



ECOVIVI 500 E27 - E40 - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalamпада E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC) stabilizzato ai raggi UV.

Decorative connection **RING** to be fixed on the luminaries diffuser.
ANELLO decorativo da fissare sul diffusore dell'apparecchio.



ECOVIVI 500 E27

EV6.000 *



Dimensions and weight

Height: 300 mm
Diameter: 600 mm
Weight: 5 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,0982

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

E27-E40

*ADD SUFFIX




Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 150W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40


HORIZONTAL BULB

AGAINST LIGHT POLLUTION



E27 - E40 VERSION

PHOTOMETRIC DATA SAMPLE

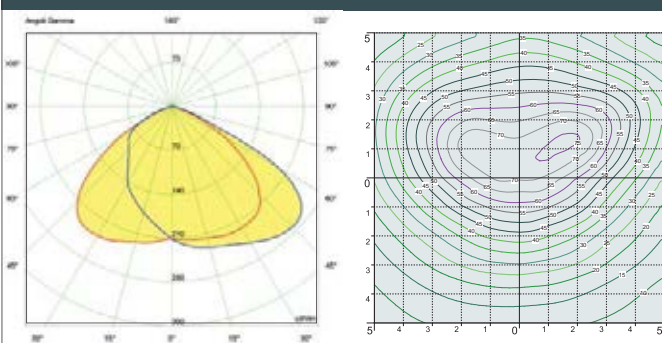

ECOVIVI 500 clear HQI 150W.

POST height 5mt
10x10mt area: average 38 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

ECOVIVI 500

GRAND SIZE



EV6.384.P20.E27



L5F.128.D9K




EV6.253.D9K



EV60.129.D9K



MADE IN ITALY



ECOVIVI 500
EV6.000

Pcs 1
Kg 6,7
mc 0,06

LUIGI 500
L5F.128

Pcs 1
Kg 3,7
mc 0,09

NEW LOT/ECOVIVI500
EV6.115

Pcs 1
Kg 4,9
mc 0,09

PILAR/ECOVIVI500
EV6.253

Pcs 1
Kg 8,7
mc 0,11

MARIO/ECOVIVI500
EV6.129

Pcs 1
Kg 4,9
mc 0,09

EKTOR 6000 PILAR/ECOVIVI500 2L
EV6.384.P20

Pcs 1
Kg 92,6
mc 1,42


EKTOR 6000 PILAR/ECOVIVI500 1L
EV6.384.P10

Pcs 1
Kg 84,2
mc 1,32

ECOVIVI 500

GRAND SIZE





EKTOR 5000 PILAR/ECOVIVI500 1L EV6.377.P10	AKILLE 5000 PILAR/ECOVIVI500 1L EV6.427.P10
Pcs 1 Kg 54,7 mc 0,39	
EKTOR 4500 PILAR/ECOVIVI500 1L EV6.374.P10	AKILLE 4500 PILAR/ECOVIVI500 1L EV6.424.P10
Pcs 1 Kg 49,2 mc 0,37	
EKTOR 4000 PILAR/ECOVIVI500 1L EV6.371.P10	AKILLE 4000 PILAR/ECOVIVI500 1L EV6.421.P10
Pcs 1 Kg 43,7 mc 0,35	

EKTOR 5000 PILAR/ECOVIVI500 2L EV6.377.P20	AKILLE 5000 PILAR/ECOVIVI500 2L EV6.427.P20
Pcs 1 Kg 63,1 mc 0,49	
EKTOR 4500 PILAR/ECOVIVI500 2L EV6.374.P20	AKILLE 4500 PILAR/ECOVIVI500 2L EV6.424.P20
Pcs 1 Kg 57,6 mc 0,47	
EKTOR 4000 PILAR/ECOVIVI500 2L EV6.371.P20	AKILLE 4000 PILAR/ECOVIVI500 2L EV6.421.P20
Pcs 1 Kg 52,1 mc 0,45	

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BEPPE 500 HIGH POWER LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP65.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP65.*



P50.000.H1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C 90% HUMIDITY


VOLTAGE SURGE RESISTANT



DRIVER SILICONE PROTECTION







BEPPE 500 HIGH POWER LED - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad **ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

BEPPE 500 HIGH POWER LED

P60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 7.5 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

HIGH POWER LED





- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

*ADD. SUFFIX

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.



	50 W	5300 Lm	4000 K	.H1L
E27 			3000 K	.H1R
E27 	60 W	7000 Lm	4000 K	.W1L
			3000 K	.W1R


LED LAMPS



Technical details on page 552.

PHOTOMETRIC DATA SAMPLE - BEPPE 500 HIGH POWER LED






SAVE -40%

HIGH POWER LED 60W
(power consumption)

Area: 10x10mt
Height: 5mt
25 lux

=



HQI 100W
power consumption =84W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BEPPE 500 GX53 LED

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.




P60.000.D9K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM < 6





BEPPE 500 GX53 LED - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

BEPPE 500 GX53 LED

P60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 9,1 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


		100 - 240 V		*ADD. SUFFIX
	9x 7W 63W	7200 Lm	6500 K 4000 K 3000 K	.C9K
	9x 10W 90W	10800 Lm	6500 K 4000 K 3000 K	.D9K

LED LAMPS





Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE - BEPPE 500 GX53 LED



SAVE -45%

9x10W GX53 LED 90W
(power consumption)

Area: 10x10mt
Height: 5mt
31 lux

HQI 150W
power consumption = 165W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

BEPPE 500 E27

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito con soffitto ad alta resistenza al calore idoneo per il fissaggio orizzontale della lampadina e provvisto di parabola riflettente in alluminio per dirigere il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP65.



P60.000.E27





BEPPE 500 E27 - E40 - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in polycarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalampada E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,246

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

E27-E40


*ADD. SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 150W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

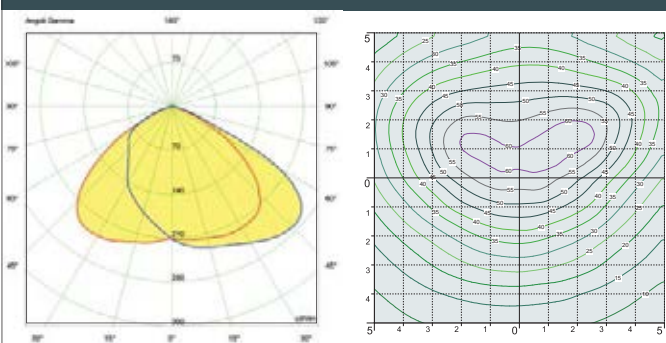

BEPPE 500 clear HQI 150W.


POST height 5mt
10x10mt area: average 31 lux


The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

BEPPE 500

GRAND SIZE

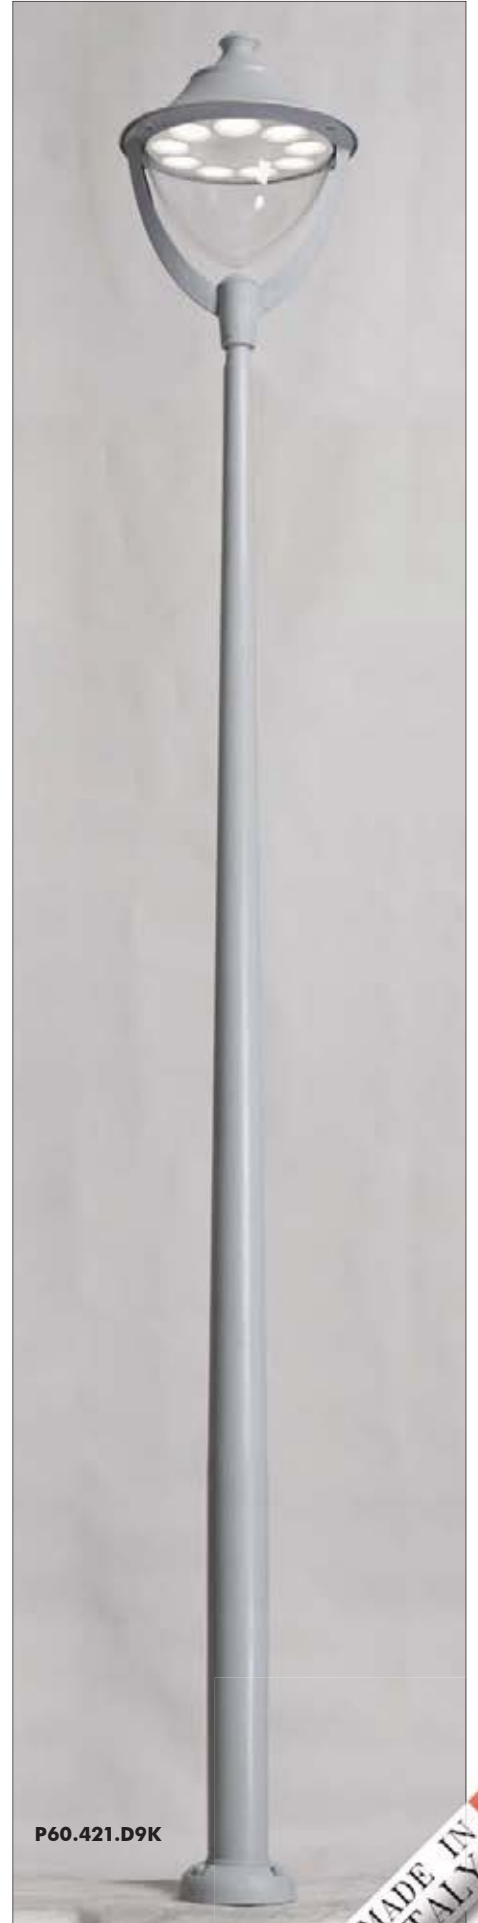



EKTOR 6000/BEPPE500
P60.384.000

600

Pcs 1
Kg 84,1
mc 1,41

6735

400

EKTOR 5000/BEPPE500 P60.377.000	AKILLE 5000/BEPPE500 P60.427.000
Pcs 1 Kg 54,6 mc 0,48	
EKTOR 4500/BEPPE500 P60.374.000	AKILLE 4500/BEPPE500 P60.424.000
Pcs 1 Kg 49,1 mc 0,46	

600

600

5735
5235

EKTOR5000

AKILLE4500

Ø 265

EKTOR 4000/BEPPE500 P60.371.000	AKILLE 4000/BEPPE500 P60.421.000
Pcs 1 Kg 43,6 mc 0,43	
EKTOR 3500/BEPPE500 P60.367.000	AKILLE 3500/BEPPE500 P60.417.000
Pcs 1 Kg 40,2 mc 0,40	
EKTOR 3000/BEPPE500 P60.364.000	AKILLE 3000/BEPPE500 P60.414.000
Pcs 1 Kg 36,8 mc 0,38	

600

600

4735
4235
3735

EKTOR4000

AKILLE3500

Ø 265

BEPPE500
P60.000

600

Pcs 1
Kg 9,1
mc 0,20

850

Ø 60

PILAR/BEPPE500
P60.253

920

Pcs 1
Kg 11,1
mc 0,24

1250

NEW LOT/BEPPE500
P60.115

600

Pcs 1
Kg 9,4
mc 0,21

960

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ECOBEPPE 500 GX53 LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di sistema modulare a LED GX53 con Kelvin regolabile certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP65.




EP6.000.D9K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





ECOBEPPE 500 GX53 LED - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in polycarbonato (PC), stabilizzato ai raggi UV.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

ECOBEPPE 500 GX53 LED

EP6.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 8,1 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:

Black White Grey
Diffuser PC (UV treated):
Clear

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


		100 - 240 V		*ADD, SUFFIX	
	9x 7W 63W	7200 Lm	6500 K 4000 K 3000 K	.C9K	
	9x 10W 90W	10800 Lm	6500 K 4000 K 3000 K	.D9K	

LED LAMPS





Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE - ECOBEPPE 500 GX53 LED



SAVE -45%

9x10W GX53 LED 90W
(power consumption)

Area: 10x10mt
Height: 5mt
31 lux

HQI 150W
power consumption = 165W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

ECOBEPPE 500 E27

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied with flat diffuser granting no upward light emission. Provided with high temperature resistant ceiling suitable for horizontal bulb fixation and with aluminum reflector to optimize the light distribution. Designed according to the international regulations against light pollution (standard UNI 10819 – Intallation area: Zone 1). Insulation class II, Protection rating IP65.


Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di soffitto ad alta resistenza al calore idoneo per orizzontale della lampadina e completo di parabola riflettente in alluminio per direzionare il flusso luminoso. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP65.



EP6.000.E27

RECYCLABLE	ANTISHOCK	TEMPERATURE	WALL	POST





ECOBEPPE 500 E27 - E40 - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant **CEILING** made of white polycarbonate (PC), UV-rays stabilized, suitable for ballast fixation on its upper side and provided with E27 or E40 lampholder on its lower side. Bulb in horizontal position.

SOFFITTO realizzato in policarbonato bianco (PC) ad alta resistenza al calore, stabilizzato ai raggi UV, nella cui parte superiore vengono fissati i reattori. Fornito completo di portalamпада E27 o E40 atto a sostenere la lampadina in posizione orizzontale.

Parabolic **REFLECTOR** made of anodized aluminium, designed to optimize the light distribution and to limit the skyward dispersion of the luminous flux.

PARABOLA riflettente realizzata in alluminio anodizzato, progettata per ottimizzare la distribuzione del flusso luminoso e limitarne la dispersione verso il cielo.

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

DIFFUSORE con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC), stabilizzato ai raggi UV.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

ECOBEPPE 500 E27

EP6.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 6,5Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:

Black White Grey
Diffuser PC (UV treated):
Clear

E27-E40


*ADD. SUFFIX



Luminaries supplied with E27 or E40 lampholder.

suitable lamps: CFL-LED SON-HQI max 150W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

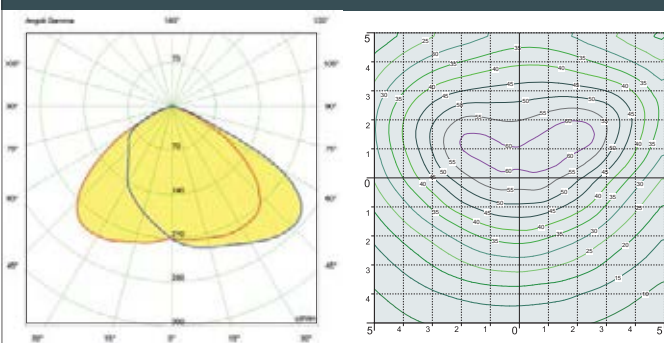

BEPPE 500 clear HQI 150W.

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE


COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

ECOBEPPE 500

GRAND SIZE




EP6.384.D9K

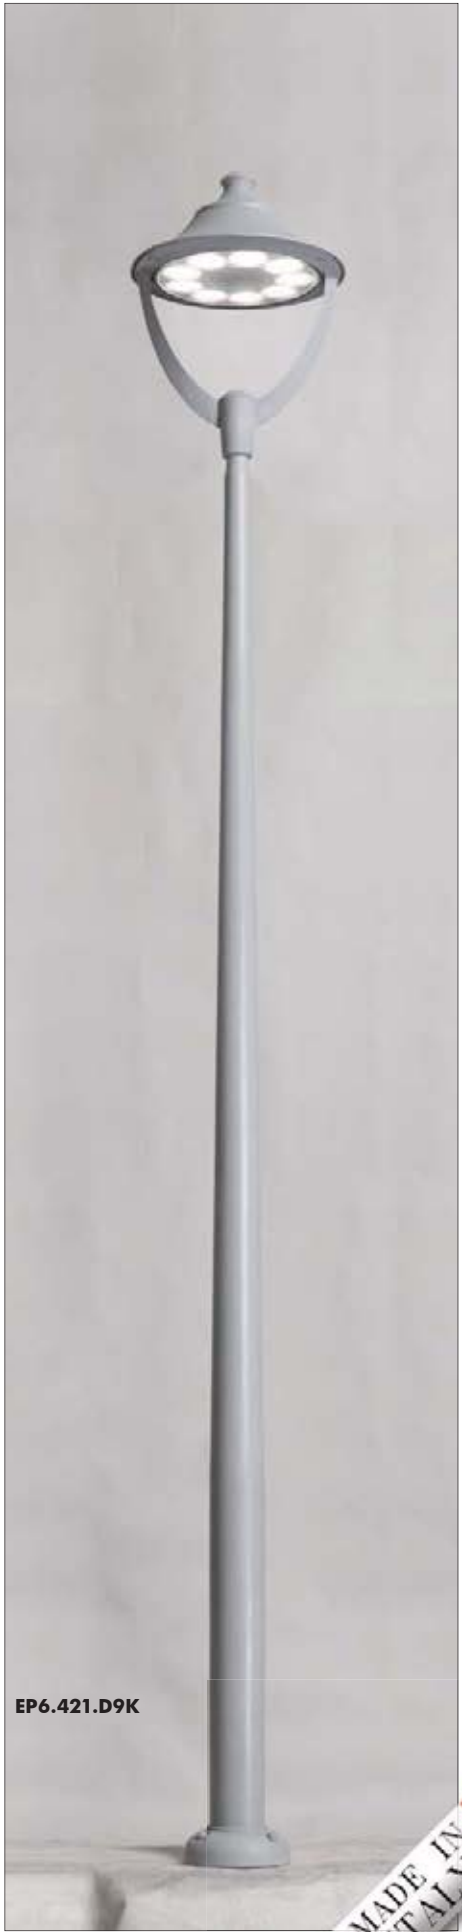

EP6.421.D9K





EKTOR 6000/ECOBEPPE500
EP6.384.000

Pcs 1
Kg 83,1
mc 1,41

600

6735

400

EKTOR 5000/ECOBEPPE500 EP6.377.000	AKILLE 5000/ECOBEPPE500 EP6.427.000
Pcs 1 Kg 53,6 mc 0,48	
EKTOR 4500/ECOBEPPE500 EP6.374.000	EKTOR 4500/ECOBEPPE500 EP6.424.000
Pcs 1 Kg 48,1 mc 0,46	

600

600

5735
5235

Ø 265

EKTOR5000

AKILLE4500

EKTOR 4000/ECOBEPPE500 EP6.371.000	AKILLE 4000/ECOBEPPE500 EP6.421.000
Pcs 1 Kg 42,6 mc 0,43	
EKTOR 3500/ECOBEPPE500 EP6.367.000	AKILLE 3500/ECOBEPPE500 EP6.417.000
Pcs 1 Kg 39,2 mc 0,40	
EKTOR 3000/ECOBEPPE500 EP6.364.000	AKILLE 3000/ECOBEPPE500 EP6.414.000
Pcs 1 Kg 35,8 mc 0,38	

600

600

4735
4235
3735

Ø 265

EKTOR4000

AKILLE3500

ECOBEPPE500
EP6.000

Pcs 1
Kg 8,1
mc 0,20

600

850

Ø 60

PILAR/ECOBEPPE500
EP6.253

Pcs 1
Kg 10,1
mc 0,24

920

1250

NEW LOT/ECOBEPPE500
EP6.115

Pcs 1
Kg 8,4
mc 0,21

600

960

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 500 HIGH POWER LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP65.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP65.*



R60.000.W1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C

90% HUMIDITY


VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION

TUV 500

CE	UV UV-TREATED	CLASS II DOUBLE INSULATION	PUBLIC
RECYCLABLE	ANTISHOCK	TEMPERATURE +90° -60°	WALL POST





REMO 500 HIGH POWER LED - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.

BASE made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation. A rubber gasket assures the protection against external agents.

BASE dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sui cui viene fissato il diffusore interno. Una guarnizione in gomma garantisce la protezione dagli agenti esterni.

REMO 500 GX53 LED

R60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 9 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,238

Moulded colours:

Black White Grey

Diffuser PMMA:



Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaires equipped with TÜV-CB certified, long-life and efficient E27 high power LED lamp, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaires maintenance very simple.


100 - 240 V				*ADD SUFFIX
E27		50 W	5300 Lm	4000 K .H1L 3000 K .H1R
E27		60 W	7000 Lm	4000 K .W1L 3000 K .W1R

LED LAMPS






Technical details on page 552.

DOWNWARD LIGHT EMISSION



PHOTOMETRIC DATA SAMPLE - REMO 500 HIGH POWER LED






SAVE -47%

HIGH POWER LED 60W
(power consumption)

Area: 10x10mt
Height: 5mt
9 lux

=



HQI 100W
power consumption = 115W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 500 GX53 LED

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Insulation class II, Protection rating IP65.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Classe di isolamento II, grado di protezione IP65.*




R60.000.D9LK

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





REMO 500 GX53 LED - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin **CONE REFLECTOR**, to direct downwards the lighting output. A silicone rubber gasket assures the protection against external agents.

BASE dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un **CONO** riflettente in resina bianca per indirizzare verso il basso il flusso luminoso. Una guarnizione in gomma siliconica garantisce la protezione dagli agenti esterni.

REMO 500 GX53 LED

R60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 9 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,238

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


		100 - 240 V		*ADD. SUFFIX
	9x 7W 63W	7200 Lm	6500 K 4000 K 3000 K	.C9K
	9x 10W 90W	10800 Lm	6500 K 4000 K 3000 K	.D9K

LED LAMPS






Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE - REMO 500 GX53 LED



SAVE -62%

9x7W GX53 LED 63W
(power consumption)

Area: 10x10mt
Height: 5mt
20 lux



HQI 150W
power consumption = 165W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

REMO 500 E27

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP65.



R60.000.E27FC6





REMO 500 E27 - E40 - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA riflettente realizzata in alluminio anodizzato, fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Resin **BASE** consisting of a support (Ø 60mm) and of a cover suitable for ballast fixation on its lower side and provided with E27 or E40 lampholder on its upper side. A rubber gasket assures the protection of the electrical accessories seat against external agents.

BASE in resina composta da un supporto e da un coperchio nella cui parte inferiore possono essere fissati i reattori e nella cui parte superiore si trova l'alloggiamento per il portalamпада E27 o E40 (incluso). Una guarnizione in gomma garantisce la protezione dell'alloggiamento degli accessori elettrici dagli agenti esterni.



REMO 500 E27

Dimensions and weight
Height: 850 mm
Diameter: 600 mm
Weight: 6,5 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,238

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

CHROME ALUMINIUM LOUVRE

H.FC6 open
Upward position



E27-E40


*ADD. SUFFIX



suitable lamps: CFL-LED SON-HQI max 150W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

Luminaries supplied with E27 or E40 lampholder.

PHOTOMETRIC DATA SAMPLE

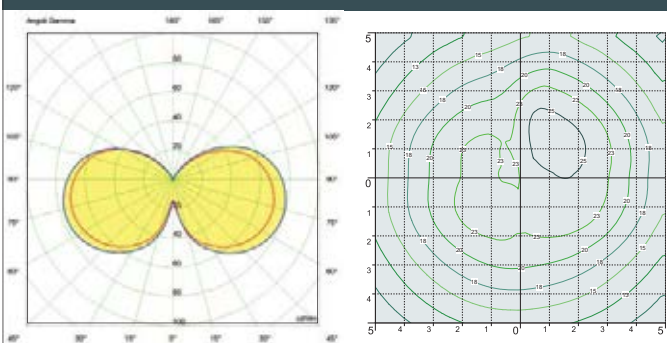

REMO 500 clear HQI 150W.

POST height 5mt
10x10mt area: average 19 lux


The photometric data for all the versions are available upon request or on our website.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

REMO 500

GRAND SIZE

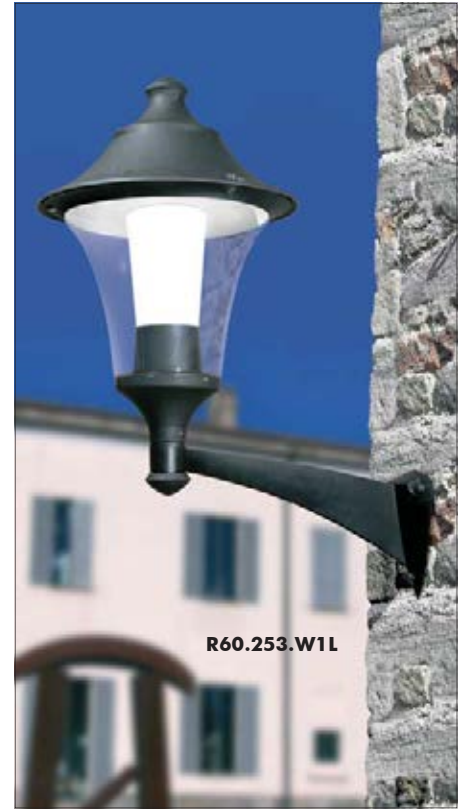



EKTOR 6000/REMO500
R60.384.000

Pcs 1
Kg 84
mc 1,32

600

6735

400

EKTOR 5000/REMO500 R60.377.000	AKILLE 5000/REMO500 R60.427.000
Pcs 1 Kg 54,5 mc 0,39	
EKTOR 4500/REMO500 R60.374.000	AKILLE 4500/REMO500 R60.424.000
Pcs 1 Kg 49 mc 0,36	

600

600

5735
5235

EKTOR5000

AKILLE4500

Ø 265

EKTOR 4000/REMO500 R60.371.000	AKILLE 4000/REMO500 R60.421.000
Pcs 1 Kg 43,5 mc 0,33	
EKTOR 3500/REMO500 R60.367.000	AKILLE 3500/REMO500 R60.417.000
Pcs 1 Kg 40,1 mc 0,31	
EKTOR 3000/REMO500 R60.364.000	AKILLE 3000/REMO500 R60.414.000
Pcs 1 Kg 36,7 mc 0,28	

600

600

4735
4235
3735

EKTOR4000

AKILLE3500

Ø 265

REMO500
R60.000

Pcs 1
Kg 9
mc 0,11

600

850

Ø 60

PILAR/REMO500
R60.253

Pcs 1
Kg 11
mc 0,14

920

1250

NEW LOT/REMO500
R60.115

Pcs 1
Kg 9,3
mc 0,12

600

960

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 500 HIGH POWER LED

GRAND SIZE




Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with double PMMA diffusers and with reflective ceiling designed to host the lighting source. Equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP65.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di un doppio diffusore in metacrilato e di soffitto riflettente, progettato per accogliere la sorgente luminosa. Fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP65.*



F60.000.W1L

MADE IN ITALY



GINO 500 E27 - E40 - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

OUTER DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE ESTERNO realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

INNER DIFFUSER made of opal PMMA to gather the lighting output and get its uniform spread.

DIFFUSORE INTERNO realizzato in PMMA opale per raccogliere il fascio di luce e garantirne un'uniforme distribuzione.

BASE made in shockproof resin material consisting of a support for post top installation (diam 60mm) and of a cover designed for the inner diffuser fixation. A rubber gasket assures the protection against external agents.

BASE dell'apparecchio realizzata in resina antiurto, composta da un supporto (diam 60mm) e da un coperchio sui cui viene fissato il diffusore interno. Una guarnizione in gomma garantisce la protezione dagli agenti esterni.

GINO 500 E27

F60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 7,3 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,262

Moulded colours:

Black White Grey

Diffuser PMMA:



Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient E27 high power LED lamp, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.


		100 - 240 V		*ADD SUFFIX
E27		50 W	5300 Lm	4000 K .H1L 3000 K .H1R
E27		60 W	7000 Lm	4000 K .W1L 3000 K .W1R

LED LAMPS






Technical details on page 552.

DOWNWARD LIGHT EMISSION



PHOTOMETRIC DATA SAMPLE - GINO 500 HIGH POWER LED






SAVE -47%

HIGH POWER LED 60W
(power consumption)

Area: 10x10mt
Height: 5mt
9 lux

=



HQI 100W
power consumption = 115W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 500 GX53 LED

GRAND SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV -CBdi lunga durata ed alta efficienza disponibile in diverse potenze. Classe di isolamento II, grado di protezione IP65.




F60.000.D9K

CCT SETTABLE

3000 K 4000 K 6500 K

SDCM <6





GINO 500 GX53 LED - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin CONE REFLECTOR, to direct downwards the lighting output. A silicone rubber gasket assures the protection against external agents.

BASE dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un CONO riflettente in resina bianca per indirizzare verso il basso il flusso luminoso. Una guarnizione in gomma silconica garantisce la protezione dagli agenti esterni.

GINO 500 GX53 LED

F60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 9,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,262

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and **9x Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.



GX53 LED

100 - 240 V

*ADD, SUFFIX


9x 7W 63W	7200 Lm	6500 K	.C9K
		4000 K	
9x 10W 90W	10800 Lm	6500 K	.D9K
		4000 K	
		3000 K	

LED LAMPS






Technical details on page 552.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE - GINO 500 GX53 LED



SAVE -62%

9x7W GX53 LED
63W
(power consumption)

Area: 10x10mt
Height: 5mt
20 lux



HQL 150W
power consumption = 165W

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GINO 500 E27

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Provided with aluminum reflector to optimize the light distribution. Base equipped with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, Protection rating IP65.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di parabola riflettente in alluminio per direzionare il flusso luminoso. Base con portalampada E27 o E40 predisposta per il fissaggio del frangiluce. Idoneo per il montaggio a palo e a parete. Classe di isolamento II, grado di protezione IP65.



F60.000.E27FC6





GINO 500 E27 - E40 - COMPONENTS

IP65



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

Parabolic **REFLECTOR** made of anodized aluminium and fixed under the luminaries roof, designed to optimize the light efficiency performance and to allow a uniform light distribution.

PARABOLA riflettente realizzata in alluminio anodizzato, fissata sotto il tetto del diffusore, progettata per ottimizzare il rendimento luminoso e permettere una uniforme distribuzione della luce.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Luminaries **BASE** consisting of a support (\varnothing 60mm) and of a cover suitable for ballast fixation on its lower side and provided with E27 or E40 lampholder on its upper side. A rubber gasket assures the protection of the electrical accessories seat against external agents.

BASE in resina composta da un supporto e da un coperchio nella cui parte inferiore possono essere fissati i reattori e nella cui parte superiore si trova l'alloggiamento per il portalampada E27 o E40 (incluso). Una guarnizione in gomma garantisce la protezione dell'alloggiamento degli accessori elettrici dagli agenti esterni.

GINO 500 E27

F60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 7,3 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,262

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

CHROME ALUMINIUM LOUVRE

H.FC6 open
Upward position




E27-E40

*ADD. SUFFIX

	suitable lamps: CFL-LED SON-HQI max 150W	E27 Lampholder only	.E27
		E40 Lampholder only	.E40
Luminaries supplied with E27 or E40 lampholder.			

PHOTOMETRIC DATA SAMPLE

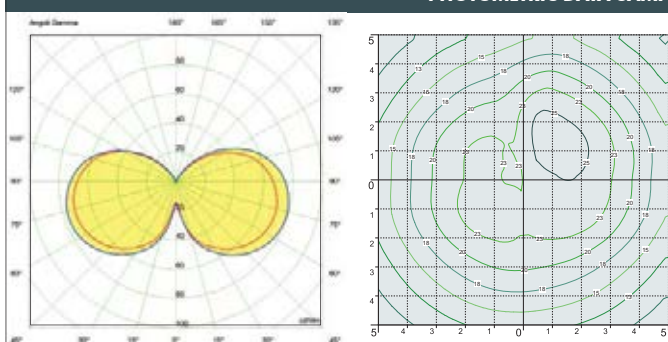

GINO 500 clear HQI 150W.

POST height 5mt
10x10mt area: average 19 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GINO 500

GRAND SIZE



F60.367.D9K



F60.421.W1L




F60.253.W1L



F60.115





EKTOR 6000/GINO 500
F60.384.000

Pcs 1
Kg 84,8
mc 1,32

600

6735

400

EKTOR 5000/GINO 500 F60.377.000	AKILLE 5000/GINO 500 F60.427.000
Pcs 1 Kg 55,3 mc 0,39	
EKTOR 4500/GINO 500 F60.374.000	AKILLE 4500/GINO 500 F60.424.000
Pcs 1 Kg 49,8 mc 0,36	

600

600

5735
5235

265

EKTOR5000

AKILLE4500

EKTOR 4000/GINO 500 F60.371.000	AKILLE 4000/GINO 500 F60.421.000
Pcs 1 Kg 44,3 mc 0,33	
EKTOR 3500/GINO 500 F60.367.000	AKILLE 3500/GINO 500 F60.417.000
Pcs 1 Kg 40,9 mc 0,31	
EKTOR 3000/GINO 500 F60.364.000	AKILLE 3000/GINO 500 F60.414.000
Pcs 1 Kg 37,5 mc 0,28	

600

600

4735
3735

265

EKTOR4000

AKILLE3500

GINO 500
F60.000

Pcs 1
Kg 9,8
mc 0,11

600

850

Ø 60

PILAR/GINO 500
F60.253

Pcs 1
Kg 11,8
mc 0,14

920

1250

NEW LOT/GINO 500
F60.115

Pcs 1
Kg 10,1
mc 0,12

600

960

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 400 MODERN

LARGE SIZE



Ø 400 mm PMMA globe, complete with modern base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP65.

Globo Ø 400 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampana E27 e predisposto per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP65.



G41.B40.E27FC1

RECYCLABLE	ANTI-SHOCK	TEMPERATURE	WALL POST




GLOBE 400 MODERN E27 - COMPONENTS

IP65



400 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 400 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

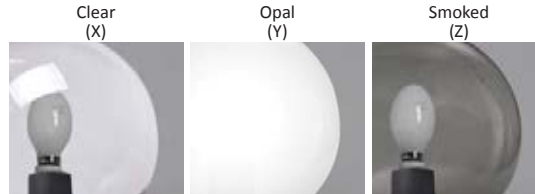

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Globe **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support (Ø 60mm) and of a cover provided with E27 lampholder. A rubber gasket assures the protection of the electrical accessories seat against external agents.

BASE del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalampana E27 (incluso). Una guarnizione in gomma garantisce la protezione dell'alloggiamento degli accessori elettrici dagli agenti esterni.

GLOBE 400 MODERN

G41.B40 *



Dimensions and weight

Height: 530 mm
Diameter: 400 mm
Weight: 2,1 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,122

Moulded colours: *

Black White Grey

Diffuser PMMA:

Clear Opal Smoked

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position



H.FC6 open
Downward position



E27

*ADD. SUFFIX




suitable lamps:
CFL-LED
max 50W

E27
Lampholder only

.E27

Globe complete with modern base and E27 lampholder.

PHOTOMETRIC DATA SAMPLE

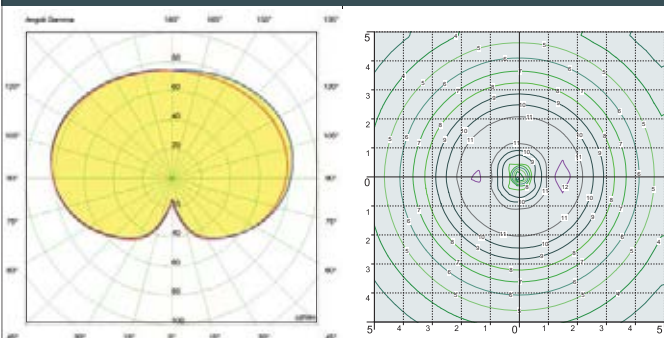

GLOBE 400 clear E27 High Power LED 50W.

POST height 3,5mt
10x10mt area: average 7 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GLOBE 400 MODERN

LARGE SIZE



G41.414.A10



G41.364.A10.E27FC6



G41.251.E27FC6



G41.254.E27FC1



G41.115

MADE IN ITALY



EKTOR 2500/GLOBE400
G41.361.000

Pcs 1
Kg 26,4
mc 0,15

400

2915

MIDIPILAR/GLOBE 400
G41.254

Pcs 1
Kg 2,7
mc 0,09

590

640

ILIO/GLOBE 400
G41.251

Pcs 1
Kg 2,7
mc 0,10

600

780

Colours available: black-white

NEW LOT/GLOBE 400
G41.115

Pcs 1
Kg 2,4
mc 0,07

400

650

GLOBE 400
G41.B40

Pcs 2
Kg 4,2
mc 0,17

400

530

Ø 60

EKTOR 4000 MIDIPILAR/GLOBE400 1L
G41.371.A10

Pcs 1
Kg 37,9
mc 0,30

AKILLE 4000 MIDIPILAR/GLOBE400 1L
G41.421.A10

EKTOR 3500 MIDIPILAR/GLOBE400 1L
G41.367.A10

Pcs 1
Kg 34,5
mc 0,26

AKILLE 3500 MIDIPILAR/GLOBE400 1L
G41.417.A10

EKTOR 3000 MIDIPILAR/GLOBE400 1L
G41.364.A10

Pcs 1
Kg 31,1
mc 0,26

AKILLE 3000 MIDIPILAR/GLOBE400 1L
G41.414.A10

705

4255
3755
3255

EKTOR3500 AKILLE3000

Ø 265

EKTOR 4000/GLOBE400
G41.371.000

Pcs 1
Kg 36,6
mc 0,21

AKILLE 4000/GLOBE400
G41.421.000

EKTOR 3500/GLOBE400
G41.367.000

Pcs 1
Kg 33,2
mc 0,19

AKILLE 3500/GLOBE400
G41.417.000

EKTOR 3000 /GLOBE400
G41.364.000

Pcs 1
Kg 29,8
mc 0,17

AKILLE 3000 /GLOBE400
G41.414.000

400

4400
3900
3400

EKTOR3500 AKILLE3000

Ø 265

EKTOR 2500 MIDIPILAR/GLOBE400 1L
G41.361.A10

Pcs 1
Kg 27,7
mc 0,24

705


2755

Ø 265

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GLOBE 400 MODERN

LARGE SIZE

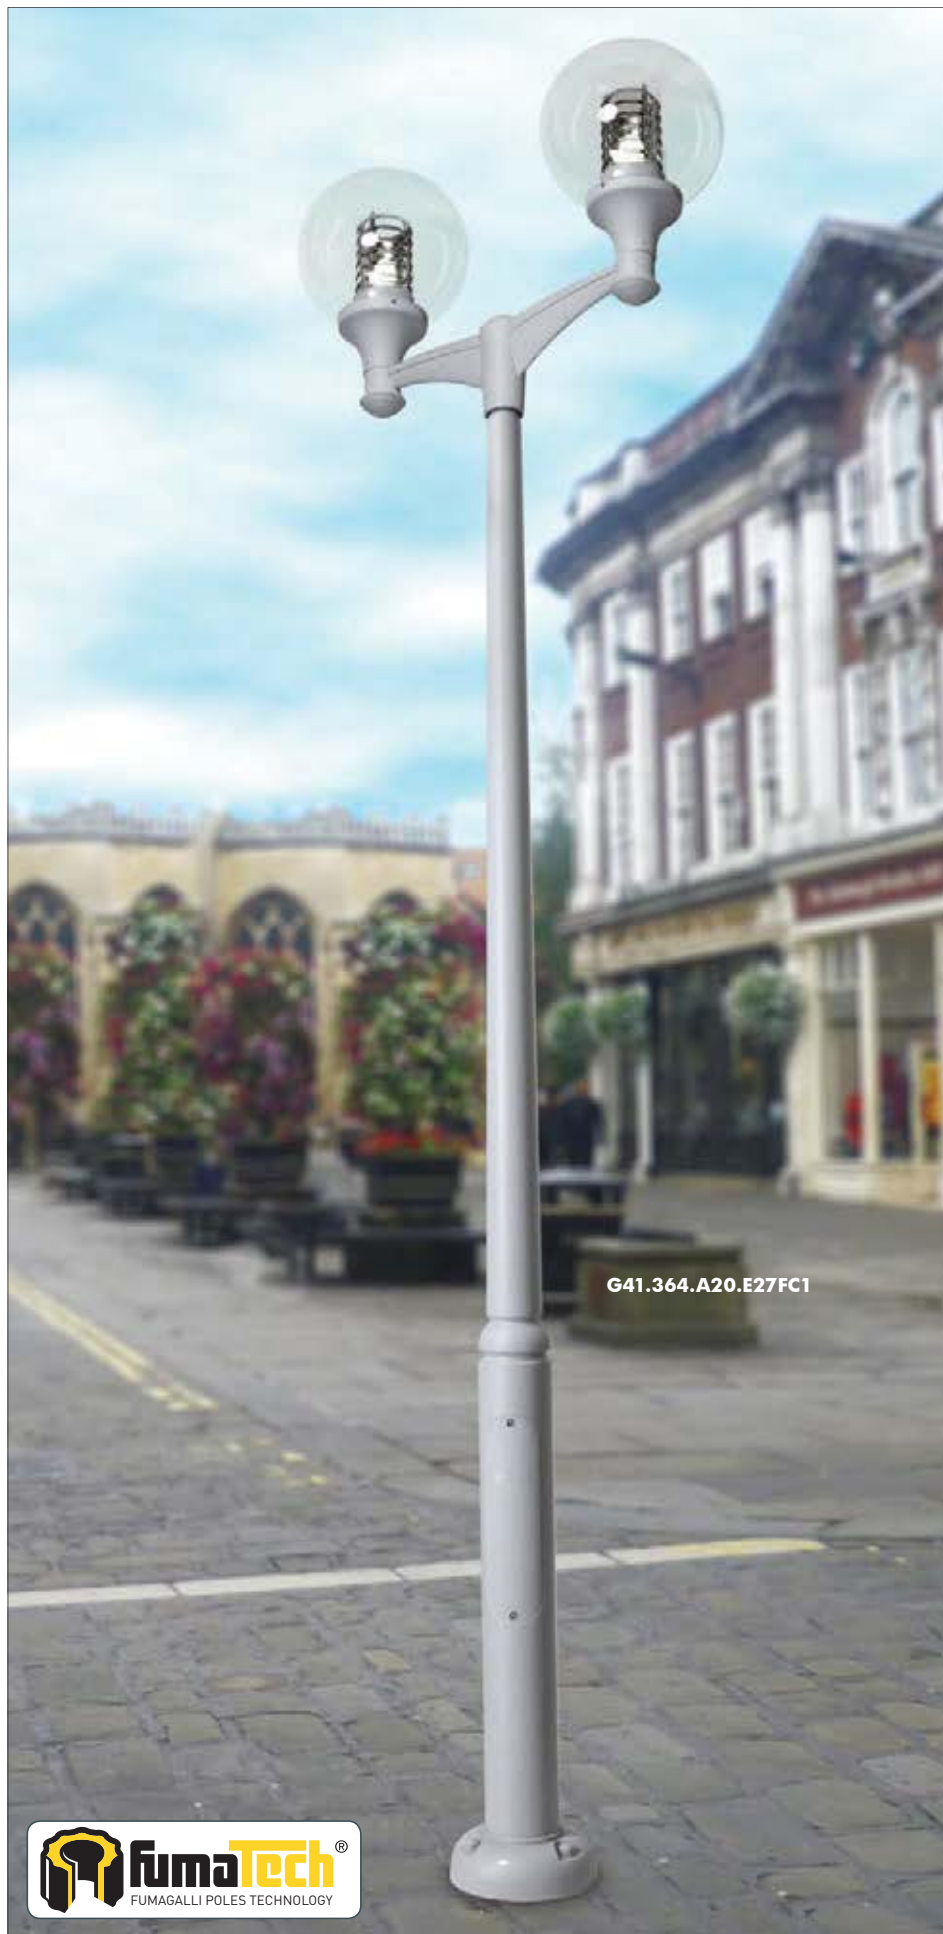

G41.364.A20.E27FC1



G41.414.A30

MADE IN ITALY



**EKTOR 2500
MIDIPIILAR/GLOBE400 3L**
G41.361.A30

Pcs 1
Kg 33,4
mc 0,51

1040

2755

**EKTOR 2500
MIDIPIILAR/GLOBE400 2L**
G41.361.A20

Pcs 1
Kg 30,6
mc 0,42

1140

3115

Ø 265

EKTOR 4000 MIDIPIILAR/GLOBE400 2L G41.371.A20	AKILLE 4000 MIDIPIILAR/GLOBE400 2L G41.421.A20
Pcs 1 Kg 40,8 mc 0,49	
EKTOR 3500 MIDIPIILAR/GLOBE400 2L G41.367.A20	AKILLE 3500 MIDIPIILAR/GLOBE400 2L G41.417.A20
Pcs 1 Kg 37,4 mc 0,47	
EKTOR 3000 MIDIPIILAR/GLOBE400 2L G41.364.A20	AKILLE 3000 MIDIPIILAR/GLOBE400 2L G41.414.A20
Pcs 1 Kg 34 mc 0,45	

1140

1140

4255
3755
3255

Ø 265

EKTOR 4000 MIDIPIILAR/GLOBE400 3L G41.371.A30	AKILLE 4000 MIDIPIILAR/GLOBE400 3L G41.421.A30
Pcs 1 Kg 43,6 mc 0,57	
EKTOR 3500 MIDIPIILAR/GLOBE400 3L G41.367.A30	AKILLE 3500 MIDIPIILAR/GLOBE400 3L G41.417.A30
Pcs 1 Kg 40,2 mc 0,55	
EKTOR 3000 MIDIPIILAR/GLOBE400 3L G41.364.A30	AKILLE 3000 MIDIPIILAR/GLOBE400 3L G41.414.A30
Pcs 1 Kg 36,8 mc 0,53	

1040

1040

EKTOR3000
AKILLE4000

4615
4115
3615

Ø 265

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GLOBE 500 MODERN

GRAND SIZE



Ø 500 mm PMMA globe, complete with modern base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 or E40 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP65.

Globo Ø 500 mm in polimetilmetacrilato (PMMA) completo di base moderna realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 o E40 e predisposto per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP65.



G51.B50.E27FC1






GLOBE 500 MODERN E27 - COMPONENTS

IP65



500 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 500 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé

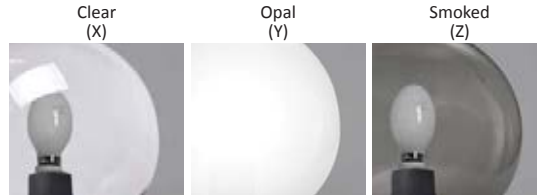

Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Globe **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support (Ø 60mm) and of a cover provided with E27 or E40 lampholder. A rubber gasket assures the protection of the electrical accessories seat against external agents.

BASE del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalampada E27 o E40 (incluso). Una guarnizione in gomma garantisce la protezione dell'alloggiamento degli accessori elettrici dagli agenti esterni.

GLOBE 500

G51.B50 *



Dimensions and weight

Height: 640 mm
Diameter: 500 mm
Weight: 4 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,181

Moulded colours:



Diffuser PMMA:



CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position



H.FC6 open
Downward position



E27-E40


*ADD SUFFIX



Globe complete with modern base and E27 lampholder.

suitable lamps: CFL-LED SON-HQI max 100W	E27 Lampholder only	.E27
	E40 Lampholder only	.E40

PHOTOMETRIC DATA SAMPLE

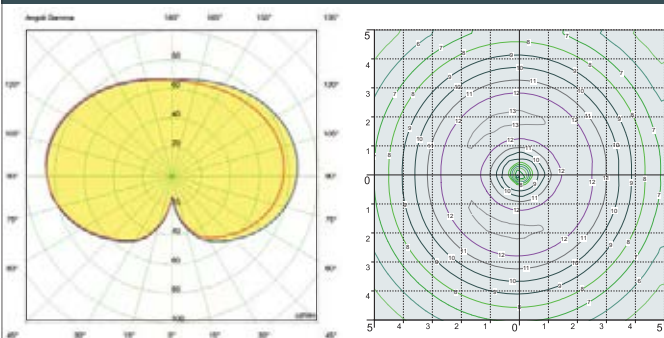

GLOBE 500 opal HQI 100.

POST height 4,5mt
10x10mt area: average 9 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GLOBE 500 MODERN

GRAND SIZE



G51.371.E27FC1



G51.371.P10.E27FC6




G51.253.E27FC6



G51.115





NEW LOT/GLOBE500
G51.115

Pcs 1
Kg 4,3
mc 0,15

PILAR/GLOBE500
G51.253

Pcs 1
Kg 6
mc 0,17

GLOBE500
G51.B50

Pcs 2
Kg 8
mc 0,29

EKTOR 5000/ GLOBE500	AKILLE 5000/ GLOBE500
G51.377.000	G51.427.000

Pcs 1 Kg 49,5 mc 0,42

EKTOR 4500/ GLOBE500	AKILLE 4500/ GLOBE500
G51.374.000	G51.424.000

Pcs 1 Kg 44 mc 0,39

EKTOR 4000/ GLOBE500	AKILLE 4000/ GLOBE500
G51.371.000	G51.421.000

Pcs 1 Kg 38,5 mc 0,37

EKTOR 3500/ GLOBE500	AKILLE 3500/ GLOBE500
G51.367.000	G51.417.000

Pcs 1 Kg 35,1 mc 0,34

EKTOR 5000 PILAR/GLOBE500 2L	AKILLE 5000 PILAR/GLOBE500 2L
G51.377.P20	G51.427.P20

Pcs 1 Kg 57,7 mc 0,64

EKTOR 4500 PILAR/GLOBE500 2L	AKILLE 4500 PILAR/GLOBE500 2L
G51.374.P20	G51.424.P20

Pcs 1 Kg 52,2 mc 0,61

EKTOR 4000 PILAR/GLOBE500 2L	AKILLE 4000 PILAR/GLOBE500 2L
G51.371.P20	G51.421.P20

Pcs 1 Kg 46,7 mc 0,58

EKTOR 5000 PILAR/GLOBE500 1L	AKILLE 5000 PILAR/GLOBE500 1L
G51.377.P10	G51.427.P10

Pcs 1 Kg 52 mc 0,45

EKTOR 4500 PILAR/GLOBE500 1L	AKILLE 4500 PILAR/GLOBE500 1L
G51.374.P10	G51.424.P10

Pcs 1 Kg 46,5 mc 0,42

EKTOR 4000 PILAR/GLOBE500 1L	AKILLE 4000 PILAR/GLOBE500 1L
G51.371.P10	G51.421.P10

Pcs 1 Kg 41 mc 0,39

REFERENCES	LAMPS	POST	URBAN MODERN	URBAN CLASSIC	GARDEN	BULKHEAD	BOLLARD	FLOODLIGHT	BRICKLIGHT	IN-GROUND	DOWNLIGHT	UP&DOWN	COMPANY
------------	-------	------	--------------	---------------	--------	----------	---------	------------	------------	-----------	-----------	---------	---------



POST



CLASSIC POSTS

OUR COLLECTION

CLASSIC lighting poles of a single piece without joints, made of shockproof composite material (steel-expanse-resin), UV-rays stabilized, rust and corrosion-free. Moulded colours in paste, no maintenance or painting required. Insulation class II. Available in many design options and different sizes from 0,7mt up to 5mt high. Provided with suitable cage for ground fixation.

Pali in stile CLASSICO fabbricati in un unico pezzo senza giunzioni. Realizzati in materiale composito antiurto (ferro-resina-poliuretano), stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Colore stampato in pasta, non necessita di verniciatura. Classe di isolamento II. Disponibili in numerose varianti decorative e in diverse altezze da mt. 0,7 a mt. 5. Provvisti di gabbia per il fissaggio a terra.



MADE IN
ITALY

METAL POST COVERED BY RESIN

Fumagalli **created** and developed a unique post technology, registered as **FUMATECH**. Fumatech technology grants to our lamps the same strength features of a metal post, combined with all the advantages in terms of rust and corrosion resistance that only a resin material can offer.

L'azienda Fumagalli ha **creato** e sviluppato un'esclusiva tecnologia per la fabbricazione dei pali, registrata come **FUMATECH**. La tecnologia FUMATECH assicura alle nostre lampade le medesime caratteristiche di solidità di un palo in metallo, con tutti i vantaggi in termini di resistenza alla ruggine e alla corrosione che solo la resina può offrire.



more details
at Pag.20



INNER METAL POLE STRUCTURE

Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

Palo strutturale in metallo galvanizzato a caldo sia all'interno che all'esterno tramite immersione in bagno di zinco.

EXPANSE

High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

Il poliuretano ad alta densità. Rigido ma molto leggero, garantisce una coesione duratura nel tempo tra il palo interno in metallo e la copertura esterna in resina.



OUTER RESIN COVER

Outer coating of a single piece without joints made of shockproof resin material:

- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire

Rivestimento esterno in un unico pezzo fabbricato in resina antiurto:

- Inattaccabile da ruggine e corrosione
- Colori in pasta stabilizzati ai raggi UV
- Autoestinguente al fuoco

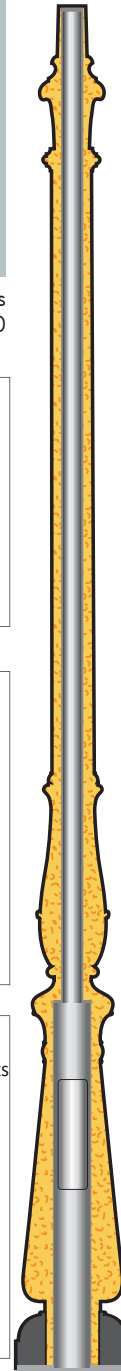


FULLY MODULAR



All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.

POST COLOURS

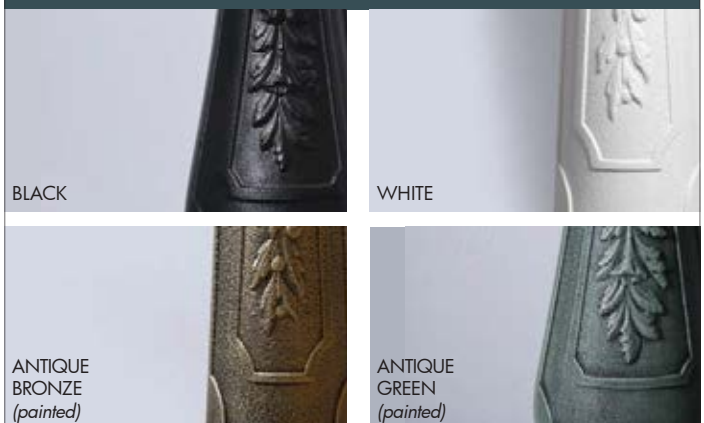

CLASSIC POSTS

INSPECTION DOORS



for KARMEI posts

Inspection door opening: **340 x 80 mm**

The inspection door can be personalized with your own logo (available only for KARMEI posts)

La porta di ispezione può essere personalizzata con il vostro LOGO (disponibile solo per i pali KARMEI)

for NEBO TABOR HOREB posts

Inspection door opening: **320 x 60 mm**

Duble Insulation
4 x 16 mm²
3 - WAY

CLASS II **IP44**

Fuse holder lfo electric cc.10

for GIONA posts


Inspection door opening: **185 x 80 mm**

VERY EASY MAINTENANCE: IT'S ENOUGH TO CLEAN THE POST WITH SOME OIL TO KEEP IT AS BRIGHT AS NEW.

CLASSIC POST - FOUNDATION SYSTEM



SUGGESTED SIZES FOR CONCRETE FOUNDATION





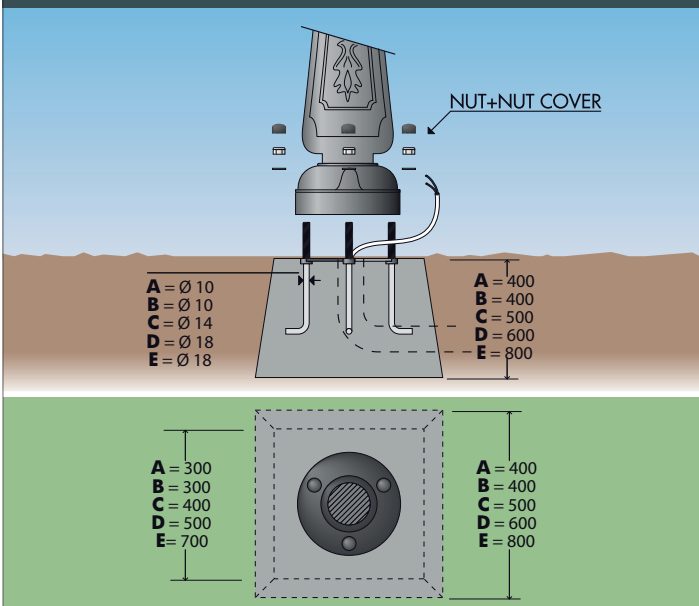


All Fumagalli poles are supplied with suitable cages for fixing into concrete foundations. The size of the cages and the size of the concrete foundation varies according to the high of the post.

Tutti i pali Fumagalli sono forniti complete di gabbie per il fissaggio a terra. Le dimensioni della gabbia e del plinto di cemento variano a secondo dell'altezza del palo.

The fixation system with two triangles allows the anchor bolts to be cemented perpendicularly to the ground. The second triangle has to be removed before installing the pole.

Il sistema di fissaggio con due triangoli assicura che i tiranti vengano affogati nel cemento in maniera perfettamente perpendicolare rispetto al terreno. Il secondo triangolo deve essere rimosso prima di procedere al fissaggio del palo.

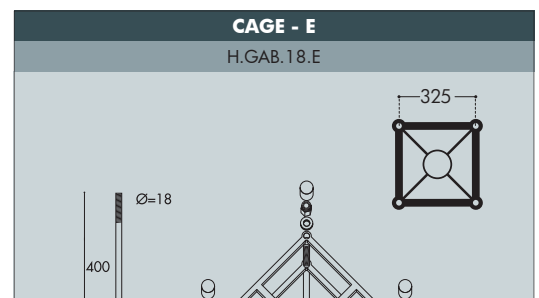

CLASSIC POSTS

CLASSIC POST COLLECTION








Each post is supplied with the suitable cage or screws for fixation.

Colours available for the CLASSIC range are the following:

Moulded colours: **Black - White**

Painted Colours: **Antique Green - Antique Bronze**

WITHOUT DOOR
WITH DOOR
WITH DOOR AND BOX

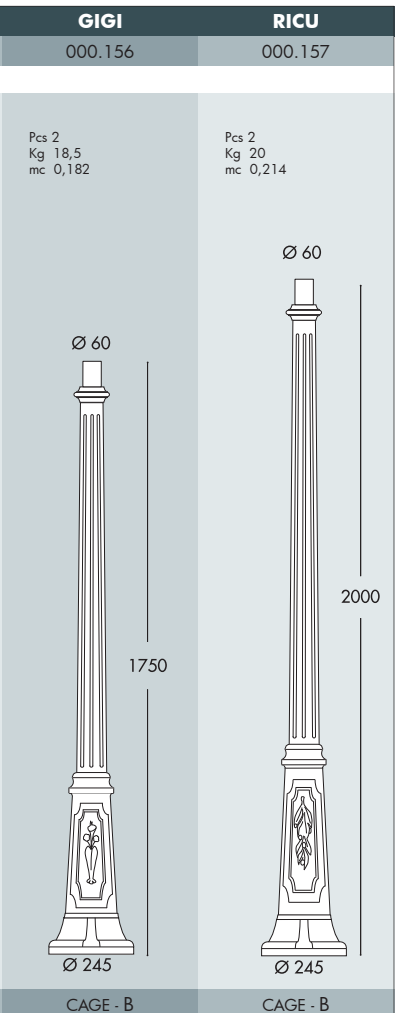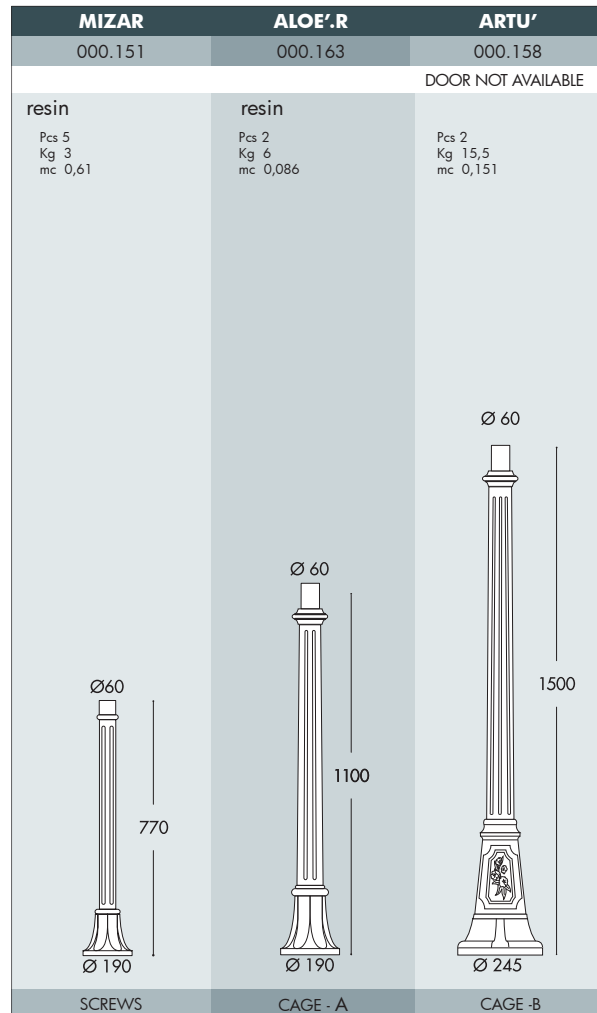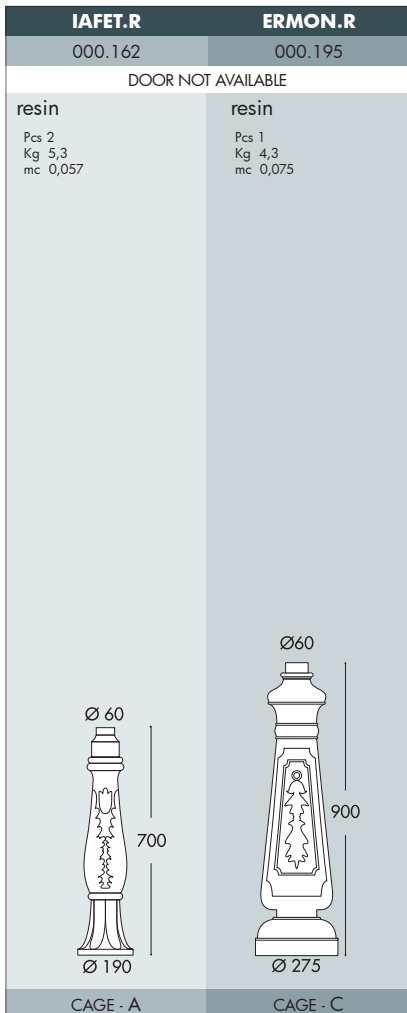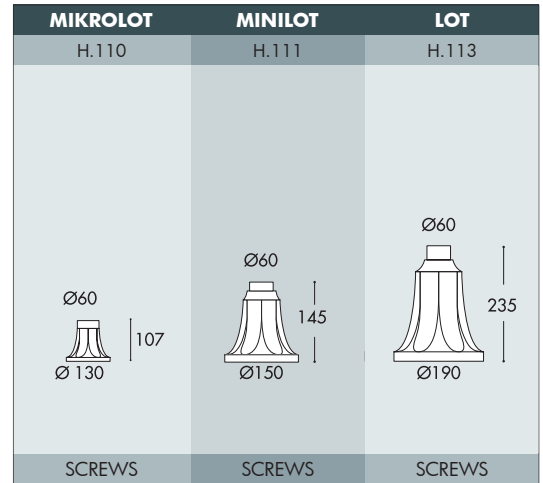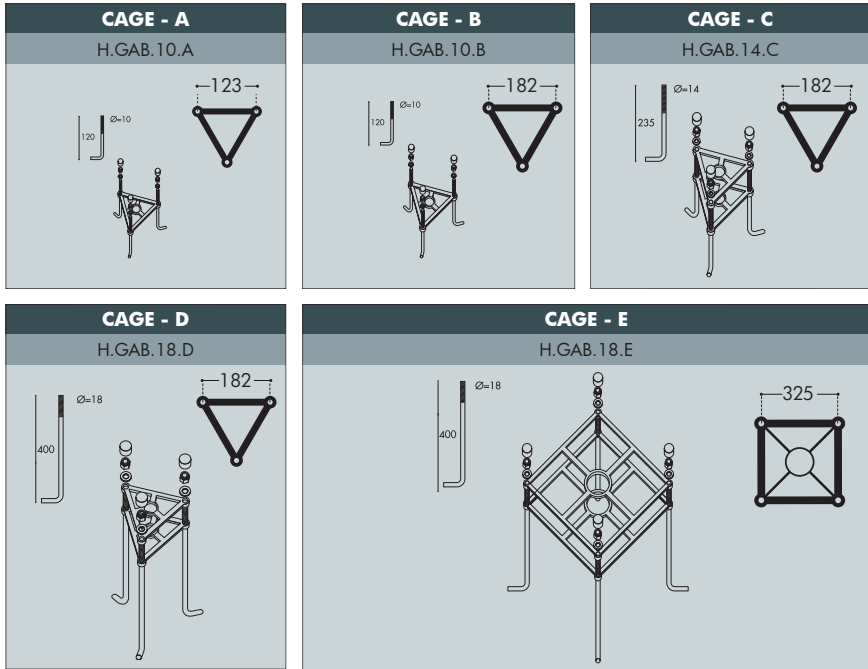

NEBO			TABOR			HOREB			KARMEL 3000			KARMEL 3500			KARMEL 4000			GIONA 4000			GIONA 4500			GIONA 5000		
000.201	000.204	000.207	000.202	000.205	000.208	000.203	000.206	000.209	000.231	000.234	000.237	000.232	000.235	000.238	000.233	000.236	000.239	000.221	000.224	000.227	000.222	000.225	000.228	000.223	000.226	000.229
DOOR IS OPTIONAL									DOOR IS OPTIONAL									DOOR IS OPTIONAL								
Pcs 1 Kg 21 mc 0,135	Pcs 1 Kg 25,5 mc 0,164	Pcs 1 Kg 28 mc 0,190	Pcs 1 Kg 25,5 mc 0,167	Pcs 1 Kg 28 mc 0,193	Pcs 1 Kg 30,5 mc 0,220	Pcs 1 Kg 55 mc 0,744	Pcs 1 Kg 58 mc 0,871	Pcs 1 Kg 60 mc 0,968																		
CAGE - C	CAGE - C	CAGE - C	CAGE - C	CAGE - C	CAGE - D	CAGE - E	CAGE - E	CAGE - E																		

CLASSIC POSTS

CLASSIC POST TOP SYSTEMS

FULLY MODULAR



Ø 60mm

All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.

I terminali di connessione dei pali e delle lanterne FUMAGALLI hanno sempre un diametro di 60 mm; questa caratteristica unica permette svariate combinazioni di lampade complete con i medesimi componenti per una grande flessibilità di magazzino.

BISSO SYSTEM

BISSO SYSTEM 2L 000.000.S20	BISSO SYSTEM 2 + 1 000.000.S21	BISSO SYSTEM 3L 000.000.S30	BISSO SYSTEM 3 + 1 000.000.S31
550	550	470	470

OFIR SYSTEM




















OFIR SYSTEM 2L 000.000.R20	OFIR SYSTEM 2 + 1 000.000.R21	OFIR SYSTEM 3L 000.000.R30	OFIR SYSTEM 3 + 1 000.000.R31
650	650	560	560

ADAM SYSTEM

ADAM SYSTEM 2L 000.000.M20	ADAM SYSTEM 2 + 1 000.000.M21	ADAM SYSTEM 3L 000.000.M30	ADAM SYSTEM 3 + 1 000.000.M31
1050	1050	900	900

ARON SYSTEM

ARON SYSTEM 1L 000.000.N10	ARON SYSTEM 2L 000.000.N20	ARON SYSTEM 4L 000.000.N40
950	1900	1900

	SMALL SIZE		MEDIUM SIZE		LARGE SIZE		GRAND SIZE	
HEXAGONAL LANTERNS	ANNA E22.000	SABA K22.000	RUT E26.000	SALEM K26.000	NOEMI E35.000	SILOE K35.000		
	 220 310 Ø 60	 220 320 Ø 60	 260 410 Ø 60	 260 410 Ø 60	 350 530 Ø 60	 350 530 Ø 60		
SQUARE LANTERNS			GOLIA Q23.000	CEFA U23.000	TOBIA Q33.000	SIMON U33.000	ELIA Q43.000	PIETRO U43.000
			 230 360 Ø 60	 230 380 Ø 60	 330 520 Ø 60	 330 560 Ø 60	 430 740 Ø 60	 430 770 Ø 60
HALF LANTERNS	IESSE M22.000			DARIA M28.000			AMPHORAE	CANA 500 C50.B50
	 130 350 220			 143 515 280				 690 Ø400
GLOBES	GLOBE 250 CLASSIC G25.B25	GLOBE 300 CLASSIC G30.B30	GLOBE 400 CLASSIC G40.B40	GLOBE 500 CLASSIC G50.B50				
	 260 Ø 250 Ø 60	 310 Ø 300 Ø 60	 530 Ø 400 Ø 60	 630 Ø 500 Ø 60				

MODERN POSTS

OUR COLLECTION



MODERN lighting poles of a single piece without joints, made of shockproof composite material (steel-expanse-resin), UV-rays stabilized, rust and corrosion-free. Insulation class II. Moulded colours in paste, no maintenance or painting required. Insulation class II. Available in many design options and different sizes from 0,7mt up to 6mt high. Provided with suitable cage for ground fixation.

Pali in stile MODERNO fabbricati in un unico pezzo senza giunzioni. Realizzati in materiale composito antiurto (ferro-resina-poliuretano), stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Colore stampato in pasta, non necessita di verniciatura. Classe di isolamento II. Disponibili in numerose varianti decorative e in diverse altezze da mt. 0,7 a mt. 6. Provvisti di gabbia per il fissaggio a terra.



METAL POST COVERED BY RESIN

Fumagalli **created** and developed a unique post technology, registered as **FUMATECH**. Fumatech technology grants to our lamps the same strength features of a metal post, combined with all the advantages in terms of rust and corrosion resistance that only a resin material can offer.

L'azienda Fumagalli ha **creato** e sviluppato un'esclusiva tecnologia per la fabbricazione dei pali, registrata come **FUMATECH**. La tecnologia FUMATECH assicura alle nostre lampade le medesime caratteristiche di solidità di un palo in metallo, con tutti i vantaggi in termini di resistenza alla ruggine e alla corrosione che solo la resina può offrire.



more details
at Pag.20



INNER METAL POLE STRUCTURE

Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

Palo strutturale in metallo galvanizzato a caldo sia all'interno che all'esterno tramite immersione in bagno di zinco.

EXPANSE

High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

Il poliuretano ad alta densità. Rigido ma molto leggero, garantisce una coesione duratura nel tempo tra il palo interno in metallo e la copertura esterna in resina.



OUTER RESIN COVER

Outer coating of a single piece without joints made of shockproof resin material:

- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire

Rivestimento esterno in un unico pezzo fabbricato in resina antiurto:

- Inattaccabile da ruggine e corrosione
- Colori in pasta stabilizzati ai raggi UV
- Autoestinguente al fuoco

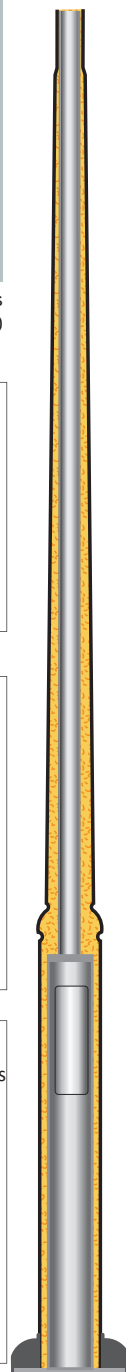

MODULAR SYSTEM



All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.

POST COLOURS



MODERN POSTS

INSPECTION DOORS



for EKTOR and AKILLE posts

Inspection door opening: **340 x 80 mm**

The inspection door can be personalized with your own logo (available for EKTOR and AKILLE posts)

La porta di ispezione può essere personalizzata con il vostro LOGO (disponibile per i pali EKTOR e AKILLE)

for EKTOR2500 post

Inspection door opening: **340 x 80 mm**

Duble Insulation
4 x 16 mm²
3 - WAY

CLASS II **IP44**


Fuse holder Ifo electric cc.10



MODERN POST - FOUNDATION SYSTEM



SUGGESTED SIZES FOR CONCRETE FOUNDATIONS




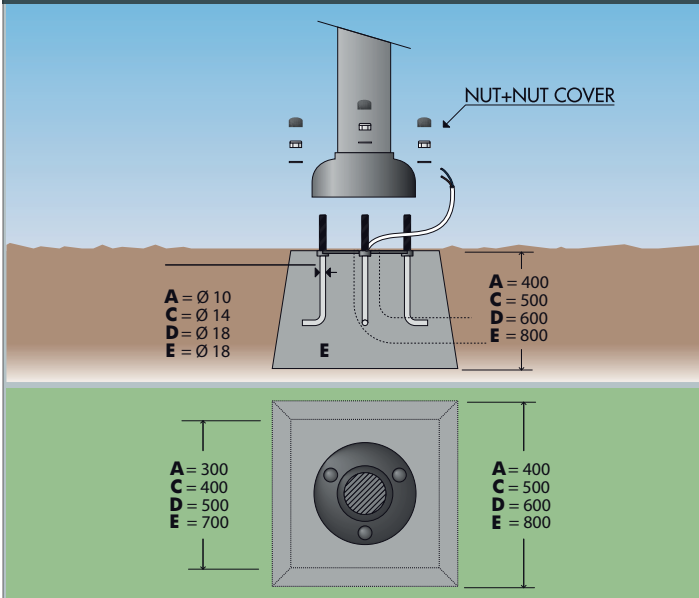


All Fumagalli poles are supplied with suitable cages for fixing into concrete foundations. The size of the cages and the size of the concrete foundation varies according to the high of the post.

Tutti i pali Fumagalli sono forniti complete di gabbie per il fissaggio a terra. Le dimensioni della gabbia e del plinto di cemento variano a secondo dell'altezza del palo.

The fixation system with two triangles allows the anchor bolts to be cemented perpendicularly to the ground. The second triangle has to be removed before installing the pole.

Il sistema di fissaggio con due triangoli assicura che i tiranti vengano affogati nel cemento in maniera perfettamente perpendicolare rispetto al terreno. Il secondo triangolo deve essere rimosso prima di procedere al fissaggio del palo.

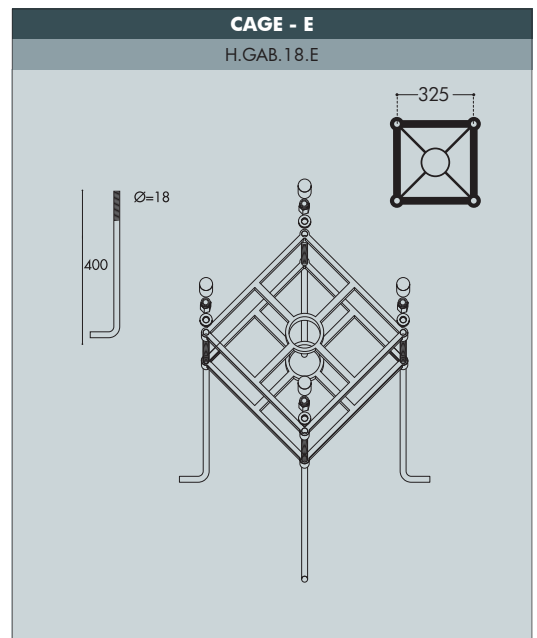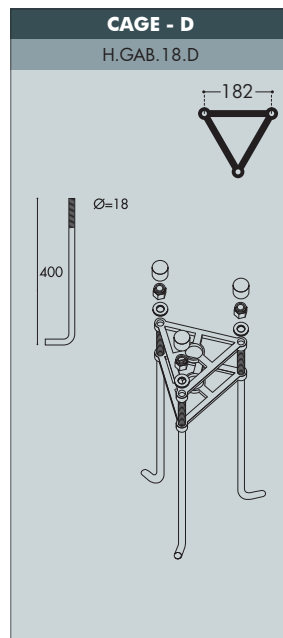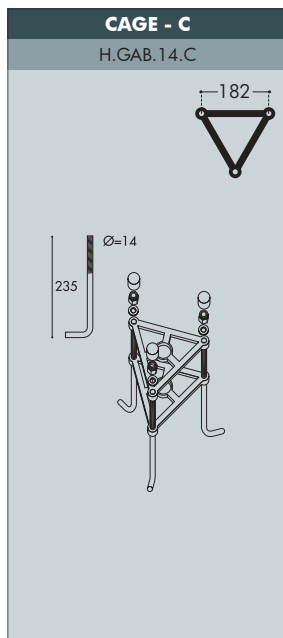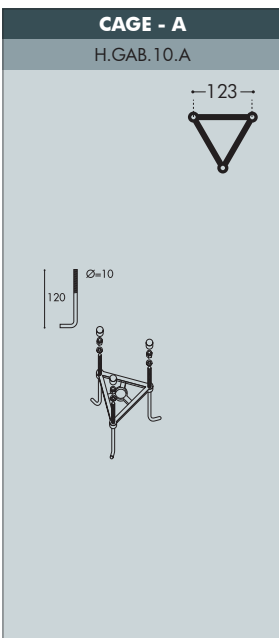

MODERN POSTS

MODERN POST COLLECTION







Each post is supplied with the suitable cage or screws for fixation.

Moulded Colours available for the MODERN range are the following:

For ARGO, FEBO and ENEA posts: **Black - White**

For EKTOR and AKILLE posts: **Black - White - Grey**

	AKILLE 3000	AKILLE 3500	AKILLE 4000
WITHOUT DOOR	000.414	000.417	000.421
WITH DOOR	000.415	000.418	000.422
WITH DOOR AND BOX	000.416	000.419	000.423

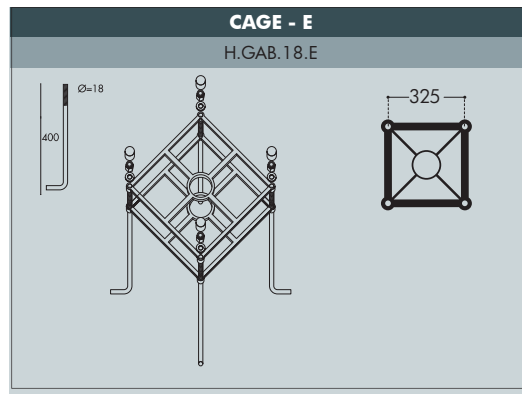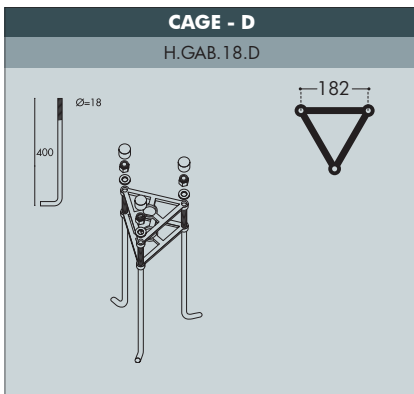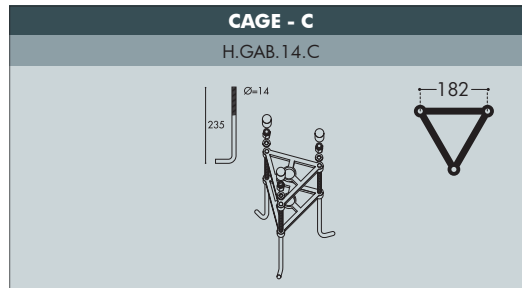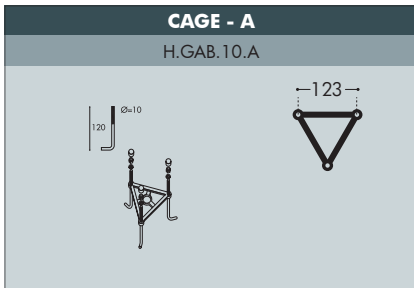

DOOR IS OPTIONAL

Pcs 1
Kg 27,7
mc 0,159

Pcs 1
Kg 31,1
mc 0,185

Pcs 1
Kg 34,5
mc 0,212

ARGO	FEBO 500	FEBO 1000	FEBO 1500
000.241	000.261	000.262	000.263
DOOR NOT AVAILABLE			
resin	resin	resin	
Pcs 10 Kg 4,4 mc 0,060	Pcs 4 Kg 6,7 mc 0,057	Pcs 4 Kg 9,3 mc 0,086	Pcs 4 Kg 19,6 mc 0,118
	Ø 60 500	Ø 60 1000	Ø 60 1500
SCREWS	CAGE - A	CAGE - A	CAGE - A

ENEA 2000	ENEA 2400	ENEA 2800
000.264	000.265	000.266
DOOR NOT AVAILABLE		
Pcs 1 Kg 8 mc 0,111	Pcs 1 Kg 10 mc 0,132	Pcs 1 Kg 12,5 mc 0,151
Ø 60 2000	Ø 60 2400	Ø 60 2800
CAGE - A	CAGE - A	CAGE - A

Ø 60 3000	Ø 60 3500	Ø 60 4000
CAGE - C	CAGE - C	CAGE - D

AKILLE 4500	AKILLE 5000
000.424	000.427
000.425	000.428
000.426	000.429


DOOR IS OPTIONAL

Pcs 1
Kg 40
mc 0,238

Pcs 1
Kg 45,5
mc 0,265



CAGE - D



CAGE - D

EKTOR 2500	EKTOR 3000	EKTOR 3500	EKTOR 4000	EKTOR 4500	EKTOR 5000	EKTOR 6000
000.361	000.364	000.367	000.371	000.374	000.377	000.384
000.362	000.365	000.368	000.372	000.375	000.378	000.385
000.363	000.366	000.369	000.373	000.376	000.379	000.386

DOOR IS OPTIONAL

Pcs 1
Kg 24,3
mc 0,159

Pcs 1
Kg 27,7
mc 0,159

Pcs 1
Kg 31,1
mc 0,185

Pcs 1
Kg 34,5
mc 0,212


Pcs 1
Kg 40
mc 0,238

Pcs 1
Kg 45,5
mc 0,265


Pcs 1
Kg 75
mc 1,21




CAGE - C




CAGE - C




CAGE - C




CAGE - D



CAGE - D



CAGE - D

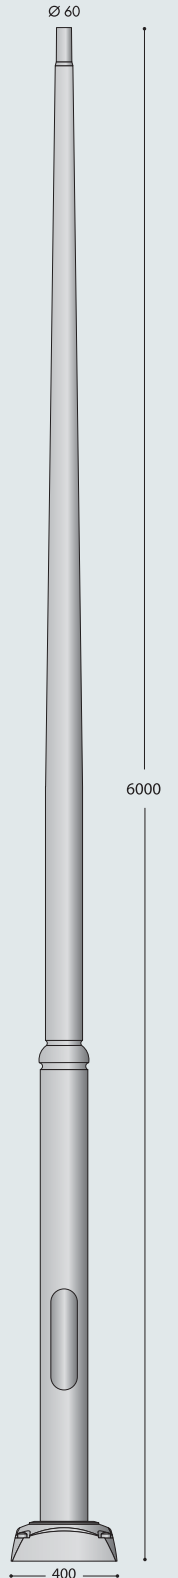

CAGE - E

MODERN POSTS

MODERN POST TOP SYSTEMS



FULLY MODULAR


All the connection hubs of FUMAGALLI poles and lanterns have a diameter of 60 mm; this unique feature allows many different possible combinations of complete lamps with the same components, for a big stock flexibility.

I terminali di connessione dei pali e delle lanterne FUMAGALLI hanno sempre un diametro di 60 mm; questa caratteristica unica permette svariate combinazioni di lampade complete con i medesimi componenti per una grande flessibilità di magazzino.

GIORGIO

4P2.000.G10


4P1.000.G10



ROSA

4P2.000.G20


4P1.000.G20



MIDIPILAR SYSTEM


MIDIPILAR SYSTEM 1L

000.000.A10




MIDIPILAR SYSTEM 2L

000.000.A20

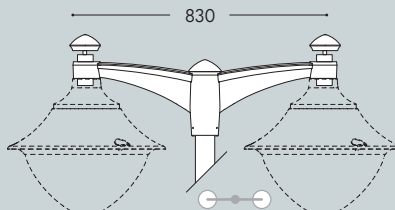

MIDIPILAR SYSTEM 3L


000.000.A30

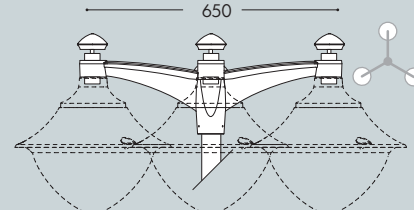

PILAR SYSTEM


PILAR SYSTEM 1L

000.000.P10



PILAR SYSTEM 2L


000.000.P20

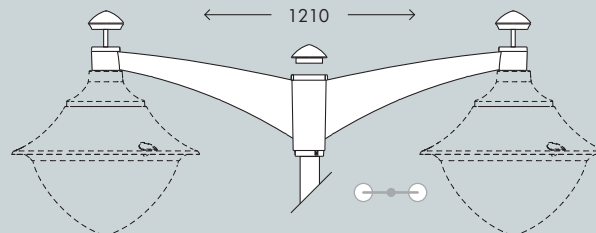

ELI SYSTEM


ELI SYSTEM 2L

000.000.L20

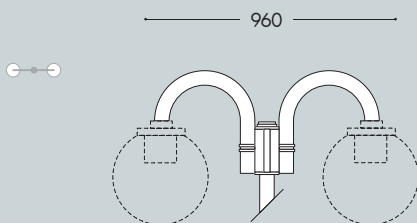

ELI SYSTEM 3L

000.000.L30

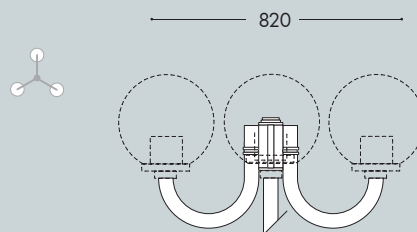

LARGE SIZE		GRAND SIZE	
<p>REMO 400 R50.000</p> <p>480 715 Ø 60 Ø480</p>	<p>GINO 400 F50.000</p> <p>480 715 Ø 60 Ø480</p>	<p>REMO 500 R60.000</p> <p>600 850 Ø 60 Ø600</p>	<p>GINO 500 F60.000</p> <p>600 850 Ø 60 Ø600</p>
<p>BEPPE 400 P50.000</p> <p>480 680 Ø 60 Ø480</p>	<p>ECOBEPPE 400 EP5.000</p> <p>480 680 Ø 60 Ø480</p>	<p>BEPPE 500 P60.000</p> <p>600 850 Ø 60 Ø600</p>	<p>ECOBEPPE 500 EP6.000</p> <p>600 850 Ø 60 Ø600</p>
<p>VIVI 400 V50.000</p> <p>480 420 Ø 60 Ø480</p>	<p>ECOVIVI 400 EV4.000</p> <p>480 243 Ø 60 Ø480</p>	<p>VIVI 500 V60.000</p> <p>600 600 Ø 60 Ø600</p>	<p>ECOVIVI 500 EV6.000</p> <p>600 300 Ø 60 Ø600</p>
<p>GLOBE 400 MODERN G41.B40</p> <p>530 Ø 60 Ø400</p>		<p>GLOBE 500 MODERN G51.B50</p> <p>630 Ø 60 Ø500</p>	

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES





LAMPS


COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

FUMAGALLI LED LAMPS

MODULAR SYSTEM



Innovative **TÜV certified LED lamps** with standard E27, GX53 ,R7s, GU10 or G9 lamp holder to get a very efficient LED lighting system. Heatsink and driver are built-in the lamps. LED modules can be easily replaced without the help of a qualified technician. Available in different wattage versions and color temperature. Moreover combining in series Fumagalli GX53 lamps you get a powerful and efficient public lighting system both on classic and modern luminaries.

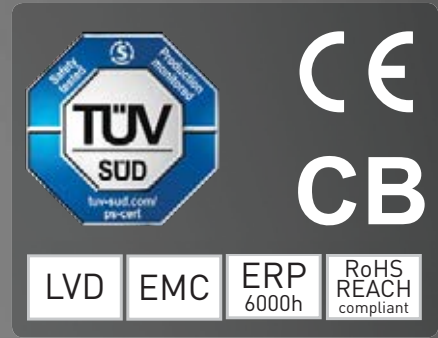

BENEFITS:

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.
- **TÜV CERTIFIED QUALITY:** Production monitored, CE marked, LVD and EMC tested, in compliance with the European Ecodesign Directive (ERP) and with RoHS and REACH directives. CB certified.



Power surges resistant

- **Wide voltage range (100-240V)** to protect the driver both from voltage droop and voltage overshoot, which are quite frequent in case of outdoor installations.
- **Double 400V capacitors** and multiple resistances to withstand power surges.
- **Silicone paste** to avoid – in case of voltage swings- the vibration of the electronic components of the driver and the consequent risk of components unsoldering.



Heat resistant - Working temperature -30°+80°C

- **Gold wire bonding:** Chips connected by pure gold wires, which are able to withstand at the highest and lowest temperatures and at temperature fluctuations between day and night. The gold wire bonding can grant a lumens maintenance factor > 80%.
- **Silicone paste:** Thermoconductive silicone paste with metal powder inside for helping heat dissipation and avoid overheating problems and for protecting the electronic components in case of high and low temperatures.




Humidity resistant - Weatherproof driver for a longer lifetime

- **Silicone paste:** The driver is fully enclosed in a special silicone paste, which ensures the highest driver protection against moisture and humidity up to 90%, both unavoidable in outdoor installations.



Tested according to :
EN 62560:2012/A1: 2015
IEC/TR 62778:2014
EN 62493:2015

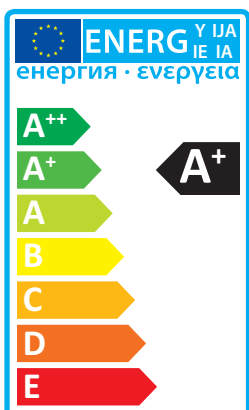

LVD
TESTED

LVD Certificate: Fumagalli lamps fulfil the Low Voltage Directive 2014/35/EU, therefore are CE marked and comply with safety requirements like protection against electrical shock, moisture and heat resistance, resistance to flame and ignition.

EMC
TESTED

EMC Certificate: Fumagalli lamps meet the Electromagnetic Compatibility Directive 2014/30/EU and its amendments.



ERP
6000 h

ERP Attestation of conformity: Fumagalli lamps fulfil the European Ecodesign Directive 2009/125/EC and EU 2015/1428 about the energy performance requirements of energy related products. Lamp lumen maintenance factor after 6.000 hrs > 80%

CB
IECEE CB SCHEME

IECEE CB Certificate: Fumagalli lamps meet the International System for Conformity and Certification of Electrotechnical Equipment allowing direct market access in more than 50 countries all over the world.

RoHS
REACH
COMPLIANT

RoHS REACH compliant: Fumagalli lamps fulfil the RoHS (Restriction of Hazardous Substances) directive 2011/65/EU and its amendments and the REACH regulation (EC) No. 1907/2006, regarding the concentration of Very High Concern Substances (SVHC).



COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

E27 HIGH POWER LED

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION

DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

GOLD WIRE BONDING

- 120 LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528.

LENS

- Opal color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Special lens design for a better light distribution.

HEATSINK

- Made by white painted aluminum.
- Special design to grant a correct heat dissipation.


THERMOCONDUCTIVE SILICONE PASTE










- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.











DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.





E27 HIGH POWER LED		POWER	15 W	30 W	
 	 <p>SILICONE PROTECTION DRIVER</p> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p>	 <p>IECEE CB CERTIFICATE: SG PSB-LE-01712 SG PSB-LE-01708</p>	LUMINOUS FLUX	1800 lm	3500 lm
			SIZE & SOCKET		
		EFFICIENCY	120 Lm/W	116 Lm/W	
		VOLTAGE	100-240 V	100-240 V	
		FREQUENCY	50/60 Hz	50/60 Hz	
		CURRENT	130 mA	135 mA	
		POWER FACTOR	> 0,5	> 0,9	
		COLOR RENDERING INDEX RA	> 80	> 80	
		SDCM	< 6	< 6	
		BEAM ANGLE	200°	200°	
		WARM UP TIME	< 0,5"	< 1"	
		SWITCHING CYCLE	30.000	30.000	
		LIFETIME	25.000 h	25.000 h	
		KELVIN	4000 K	3000 K	
		REF. CODE	H3.LED.HIP.4K H3.LED.HIP.3K	H2.LED.HIP.4K H2.LED.HIP.3K	
		COMPARISON	15W 1800 Lm = 100W incandescent  =  SAVE 85%	30W 3500 Lm = 50W HQI-SON  =  SAVE 40%	

E27 HIGH POWER LED		POWER	50 W	60 W	
 	 <p>SILICONE PROTECTION DRIVER</p> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p>	 <p>IECEE CB CERTIFICATE: SG PSB-LE-01707 SG PSB-LE-01705</p>	LUMINOUS FLUX	5300 lm	7000 lm
			SIZE & SOCKET		
		EFFICIENCY	106 Lm/W	116 Lm/W	
		VOLTAGE	100-240 V	100-240 V	
		FREQUENCY	50/60 Hz	50/60 Hz	
		CURRENT	210 mA	290 mA	
		POWER FACTOR	> 0,9	> 0,9	
		COLOR RENDERING INDEX RA	> 80	> 80	
		SDCM	< 6	< 6	
		BEAM ANGLE	200°	200°	
		WARM UP TIME	< 1"	< 0,5"	
		SWITCHING CYCLE	30.000	30.000	
		LIFETIME	25.000 h	25.000 h	
		KELVIN	4000 K	3000 K	
		REF. CODE	H.LED.HIP.4K H.LED.HIP.3K	H4.LED.HIP.4K H4.LED.HIP.3K	
		COMPARISON	50W 5300 Lm = 70W HQI-SON  =  SAVE 30%	60W 7000 Lm = 100W HQI-SON  =  SAVE 40%	

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

E27 FILAMENT LED

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION



DRIVER

INDOOR & OUTDOOR USE


-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT




GOLD WIRE BONDING

- LED chips connected by **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.




PHOSPHOR DISPENSING

- Filaments covered by Intermatix phosphor.
- Phosphor dispensed on both side of the filament allowing a better light reflection.



BULB GLASS

- Bulb glass with **90% hydrogen gas** inside to help heat dissipation.
- Filament welded and inserted into the glass by an automatic process- instead of by hand- to get a much more precise result.




SAPPHIRE CHIP SUPPORT




CHIP ON CORD TECHNOLOGY

- Epistar led chips bounded on pure synthetic **sapphire** substrate.
- Improved shock resistance.
- Higher transparency, increased lumen output and better heat dissipation in comparison with glass or ceramic substrate.




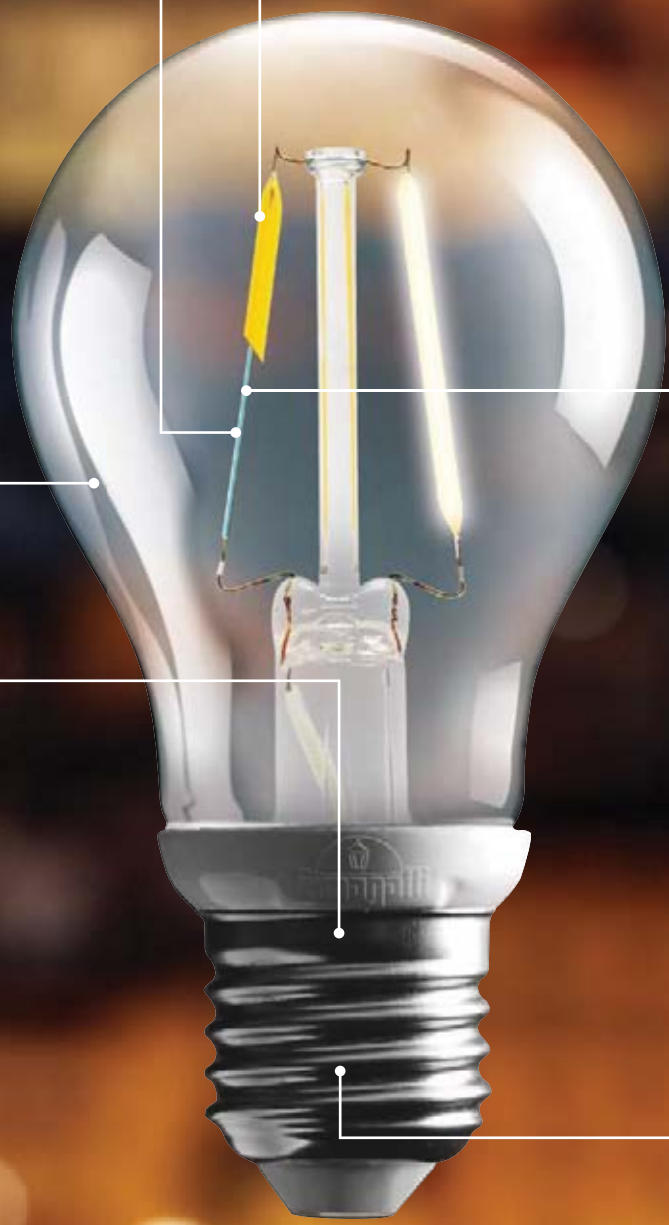
DRIVER 100-240V


- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- Double 400V capacitors** and multiple resistances to withstand power surges.








THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.

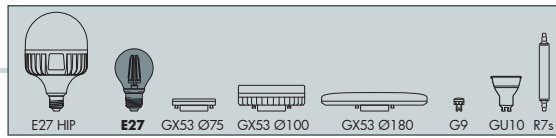

E27 LED FILAMENT A60				
		POWER	6 W	8 W
	LUMINOUS FLUX	800 lm	1000 lm	
	SIZE & SOCKET			
	EFFICIENCY	133 Lm/W	125 Lm/W	
	VOLTAGE	100-240 V	100-240 V	
	FREQUENCY	50/60 Hz	50/60 Hz	
	CURRENT	60 mA	76 mA	
	POWER FACTOR	> 0,7	> 0,7	
	COLOR RENDERING INDEX RA	> 80	> 80	
	SDCM	< 6	< 6	
BEAM ANGLE	360°	360°		
WARM UP TIME	≤ 0,5"	≤ 0,5"		
SWITCHING CYCLE	> 100.000	> 100.000		
LIFETIME	25.000 h	25.000 h		
KELVIN	4000K	2700 K	4000K	2700 K
REF. CODE	H.LED.FIL.4K	H.LED.FIL.3K	H2.LED.FIL.4K	H2.LED.FIL.3K
COMPARISON				

SILICONE PROTECTION DRIVER



INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT







TUV 900 **CE** **CB**

LVD EMC ERP 6000h

IECEE **CB SCHEME**

IECEE CB CERTIFICATE:
SG PSB-LE-01711

E27 LED FILAMENT A70				
		POWER	12 W	
	LUMINOUS FLUX	1500 lm		
	SIZE & SOCKET			
	EFFICIENCY	125 Lm/W		
	VOLTAGE	100-240 V		
	FREQUENCY	50/60 Hz		
	CURRENT	100 mA		
	POWER FACTOR	> 0,7		
	COLOR RENDERING INDEX RA	> 80		
	SDCM	< 6		
BEAM ANGLE	360°			
WARM UP TIME	≤ 0,5"			
SWITCHING CYCLE	> 100.000			
LIFETIME	25.000 h			
KELVIN	4000K	2700K		
REF. CODE	H3.LED.FIL.4K	H3.LED.FIL.3K		
COMPARISON				

SILICONE PROTECTION DRIVER



INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT



TUV 900 **CE** **CB**

LVD EMC ERP 6000h

IECEE **CB SCHEME**

IECEE CB CERTIFICATE:
SG PSB-LE-01711

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GX53 LED Ø75mm

TÜV- CB CERTIFIED LED MODULES



INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT



PCB AND CONNECTION RING

- Special connection ring to avoid the PCB deformation under high temperatures and to keep the PCB adhering to the heatsink.




LENS

- Frosted color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Very compact and **slim design** for a better light distribution and for improving the light efficiency.



GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- High quality capacitors and multiple resistances able to withstand power surges.




GX53 LAMPHOLDER


- Quick and easy lamp replacement and version upgrade.
- Made of PBT material resisting up to 180° and 250V.
- VDE certified.









CCT SETTABLE

- Switch settable in three different positions, to select the desired Kelvin temperature (3000K, 4000K, 6500K) and get a customized ambiance.
- SDCM < 6.





GX53 Ø75 - CCT SETTABLE		
 <div style="position: absolute; top: 125px; left: 330px; border: 1px solid black; padding: 2px;">  </div> <div style="position: absolute; top: 325px; left: 65px; border: 1px solid black; padding: 2px;"> <p>CCT SETTABLE</p> <p>3000 K 4000 K 6500 K</p> <p>SDCM < 6</p> </div>	POWER	3 W
	LUMINOUS FLUX	350 lm
	SIZE & SOCKET	 <p>Ø75</p> <p>20</p> <p>GX53</p>
	EFFICIENCY	116 Lm/W
	VOLTAGE	100-240 V
	FREQUENCY	50/60 Hz
	CURRENT	30 mA
	COLOR RENDERING INDEX RA	> 80
	SDCM	< 6
	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p style="text-align: center; color: red; font-weight: bold;">INDOOR & OUTDOOR USE</p> <p style="display: flex; justify-content: space-between;"> -30 +80 °C 90% HUMIDITY </p> <p style="font-weight: bold;">VOLTAGE SURGE RESISTANT</p> </div> <div style="display: flex; justify-content: space-around; align-items: center;">  <div style="text-align: center;"> <p>CE</p> <p>CB</p> </div> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px;">LVD</div> <div style="border: 1px solid black; padding: 2px;">EMC</div> <div style="border: 1px solid black; padding: 2px;">ERP 6000h</div> </div>  </div> <p style="font-size: small; text-align: center;">IECEE CB CERTIFICATE: SG PSB-LE-01706</p>	BEAM ANGLE
WARM UP TIME		0 s
SWITCHING CYCLE		> 30.000
LIFETIME		25.000 h
KELVIN SETTABLE		3000 K / 4000 K / 6500 K
REF. CODE		H.LED.G53.CCT
COMPARISON		<p>3W = 40W</p> <p>350 Lm incandescent</p>  <p>SAVE 93%</p>

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

GX53 LED Ø100mm

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION

DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

LENS

- Frosted color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.

PCB AND CONNECTION RING

- Special connection ring to avoid PCB deformation under high temperatures and to keep the PCB adhering to the heatsink.
- Special thermoconductive paste for gluing firmly the PCB to the heatsink and for helping the heat dissipation.

GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



HEATSINK

- Made by white painted aluminum.
- Special design to grant a correct heat dissipation.

DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.

GX53 LAMP HOLDER

- Quick and easy lamp replacement and version upgrade.
- Made of PBT material resisting up to 180° and 250V.
- VDE certified.




THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.

CCT SETTABLE

- Switch settable in three different positions, to select the desired Kelvin temperature (3000K, 4000K, 6500K) and get a customized ambiance.
- SDCM < 6.





GX53 Ø100 - CCT SETTABLE		
	7 W	10 W
POWER	7 W	10 W
LUMINOUS FLUX	800 lm	1200 lm
SIZE & SOCKET		
EFFICIENCY	114 Lm/W	120 Lm/W
VOLTAGE	100-240 V	100-240 V
FREQUENCY	50/60 Hz	50/60 Hz
CURRENT	34 mA	48 mA
POWER FACTOR	0,8	0,8
COLOR RENDERING INDEX RA	> 80	> 80
SDCM	< 6	< 6
BEAM ANGLE	120°	120°
WARM UP TIME	0 s	0 s
SWITCHING CYCLE	> 30.000	> 30.000
LIFETIME	25.000 h	25.000 h
KELVIN SETTABLE	3000 K / 4000 K / 6500 K	3000 K / 4000 K / 6500 K
REF. CODE	H2.LED.G53.CCT	H3.LED.G53.CCT
COMPARISON	7W = 75W 800 Lm incandescent SAVE 90%	10W = 100W 1200 Lm incandescent SAVE 90%

ENERGY CLASS
A++
A+
A
B
C
D
E

CCT SETTABLE
3000 K 4000 K 6500 K
SDCM < 6

SILICONE PROTECTION DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

TUV 900 CB

CE CB

LVD EMC ERP 6000h

IECEE CB SCHEME

IECEE CB CERTIFICATE: SG PSB-LE-01709

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

GX53 LED Ø180mm

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION



INDOOR & OUTDOOR USE


-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT




LENS

- Frosted color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Very compact and slim design for a better light distribution and for improving the light efficiency.



GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.





DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.



HEAT DISSIPATION

- Special design of the lamp base to grant a proper air circulation and avoid overheating problems.




GX53 LAMP HOLDER

- Quick and easy lamp replacement and version upgrade.
- Made of PBT material resisting up to 180° and 250V.
- VDE and NEMKO certified.




THERMOCONDUCTIVE SILICONE PASTE (11W-18W)

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.






CCT SETTABLE


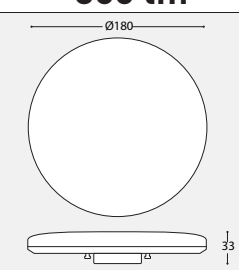
- Switch settable in three different positions, to select the desired Kelvin temperature (2700K, 4000K, 6500K) and get a customized ambiance.
- 2700K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.


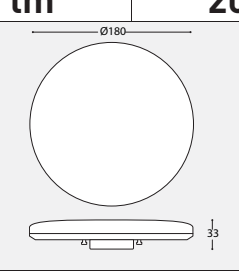


2700 K 4000 K 6500 K

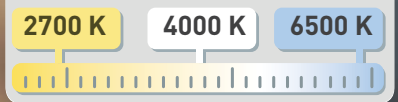

GX53 Ø180 - CCT SETTABLE			
 <p>CCT SETTABLE 2700 K 4000 K 6500 K SDCM <6</p>	<p>ENERGY CLASS A+ A A- B C D E</p>	POWER	7 W
	LUMINOUS FLUX	800 lm	
	SIZE & SOCKET	 <p>GX53</p>	
	EFFICIENCY	114 Lm/W	
	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	
	CURRENT	125 mA	
	POWER FACTOR	0,5	
	CRI (RA)	> 80	
	SDCM	< 6	
<p>INDOOR & OUTDOOR USE -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT</p> <p>TUV 900 CE CB LVD EMC ERP 6000h</p> <p>IECEE CB SCHEME IECEE CB CERTIFICATE: SG PSB-LE-02346</p>	<p>ENERGY CLASS A+ A A- B C D E</p>	BEAM ANGLE	90°
	WARM UP TIME	≤ 0,5"	
	SWITCHING CYCLE	30.000	
	LIFETIME	25.000 h	
	KELVIN SETTABLE	2700 K / 4000 K / 6500 K	
	REF. CODE	H6.LED.G53.CCT	
	COMPARISON	<p>7W = 60W 800 Lm incandescent SAVE 88%</p>	
	EFFICIENCY	114 Lm/W	
	VOLTAGE	100-240 V	
	FREQUENCY	50/60 Hz	

GX53 Ø180 - CCT SETTABLE				
 <p>CCT SETTABLE 2700 K 4000 K 6500 K SDCM <6</p>	<p>ENERGY CLASS A+ A A- B C D E</p>	POWER	11 W	18 W
		LUMINOUS FLUX	1300 lm	2000 lm
		SIZE & SOCKET	 <p>GX53</p>	
		EFFICIENCY	118 Lm/W	111 Lm/W
		VOLTAGE	100-240 V	100-240 V
		FREQUENCY	50/60 Hz	50/60 Hz
		CURRENT	140 mA	220 mA
		POWER FACTOR	0,9	0,9
		CRI (RA)	> 80	> 80
		SDCM	< 6	< 6
<p>SILICONE PROTECTION DRIVER</p> <p>INDOOR & OUTDOOR USE -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT</p> <p>TUV 900 CE CB LVD EMC ERP 6000h</p> <p>IECEE CB SCHEME IECEE CB CERTIFICATE: SG PSB-LE-02346</p>	<p>ENERGY CLASS A+ A A- B C D E</p>	BEAM ANGLE	90°	90°
	WARM UP TIME	≤ 0,5"	≤ 0,5"	
	SWITCHING CYCLE	> 25.000	> 25.000	
	LIFETIME	25.000 h	25.000 h	
	KELVIN SETTABLE	2700 K / 4000 K / 6500 K	2700 K / 4000 K / 6500 K	
	REF. CODE	H4.LED.G53.CCT	H5.LED.G53.CCT	
	COMPARISON	<p>11W = 100W 1300 Lm incandescent SAVE 89%</p>	<p>18W = 150W 2000 Lm incandescent SAVE 88%</p>	
	EFFICIENCY	118 Lm/W	111 Lm/W	
	VOLTAGE	100-240 V	100-240 V	
	FREQUENCY	50/60 Hz	50/60 Hz	


G9 LED

TÜV- CB CERTIFIED LED MODULES



INDOOR & OUTDOOR USE

-30 +80 °C	90% HUMIDITY
------------	--------------

VOLTAGE SURGE RESISTANT 

LENS

- Opal lens made of UV stabilized resin material to avoid yellowing process.
- Designed for granting 110° light distribution and for improving light efficiency.

GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.

DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.

HEATSINK


- Made by thermo-conductive ceramic material.
- Special design to grant a correct heat dissipation



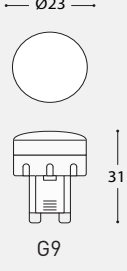


G9 LAMPHOLDER

- Quick and easy lamp replacement and version upgrade.
- Made of steatite material to resist up to 250°.
- ENEC certified.



IECEE CB CERTIFICATE



G9 LED				
		POWER	1,7 W	
	LUMINOUS FLUX	170 lm		
	SIZE & SOCKET			
<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>INDOOR & OUTDOOR USE</p> <p>-30 +80 °C 90% HUMIDITY</p> <p>VOLTAGE SURGE RESISTANT</p> </div> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  CE CB </div> <div style="display: flex; gap: 5px;"> <div style="border: 1px solid black; padding: 2px;">LVD</div> <div style="border: 1px solid black; padding: 2px;">EMC</div> <div style="border: 1px solid black; padding: 2px;">ERP 6000h</div> </div> <div style="text-align: center; margin-top: 10px;">  <small>IECEE CB CERTIFICATE: SG PSB-LE-02130</small> </div> </div>	EFFICIENCY	100 lm/W		
	VOLTAGE	100-240 V		
	FREQUENCY	50/60 Hz		
	CURRENT	17 mA		
	COLOR RENDERING INDEX RA	80		
	SDCM	< 6		
	BEAM ANGLE	110°		
	WARM UP TIME	≤ 0,5"		
	SWITCHING CYCLE	> 40.000		
	LIFETIME	15.000 h		
	KELVIN	4000 K	3000 K	
	REF. CODE	H.LED.G09.4K		H.LED.G09.3K

GU10 LED

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION

DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT

CCT SETTABLE

- Switch settable in two different positions, to select the desired Kelvin temperature (2700K, 4000K) and get a customized ambiance.
- 2700k and 4000K led chips on 2 separate circuits to grant SDCM < 6.

2700 K 4000 K

LENS

- Frosted lens with prismatic shape reducing dazzle.
- Made of UV stabilized PMMA to avoid yellowing process.

GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528 LED.



HEATSINK

- Made by aluminum and designed to grant a correct heat dissipation.

DRIVER 100-240V


- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.


GU10 LAMPHOLDER


- Quick and easy lamp replacement and version upgrade.
- Made of ceramic material to resist up to 250°.
- VDE certified.


THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.



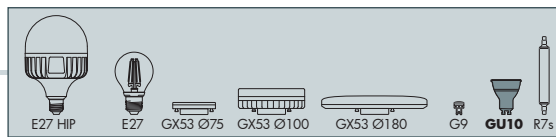

GU10 LED - CCT SETTABLE	
 <p>ENERGY CLASS A⁺</p> <p>CCT SETTABLE 2700 K 4000 K SDCM <6</p> <p>SILICONE PROTECTION DRIVER</p> <p>INDOOR & OUTDOOR USE -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT</p> <p>TUV SUD CB LVD EMC ERP 6000h IECEE CB SCHEME IECEE CB CERTIFICATE: SG PSB-LE-02300A1</p>	<p>POWER 3,5 W</p> <p>LUMINOUS FLUX 350 lm</p> <p>SIZE & SOCKET Ø50 54 GU10</p> <p>EFFICIENCY 100 lm/W</p> <p>VOLTAGE 100-240 V</p> <p>FREQUENCY 50/60 Hz</p> <p>CURRENT 70 mA</p> <p>COLOR RENDERING INDEX RA > 80</p> <p>SDCM < 6</p> <p>BEAM ANGLE 36°</p> <p>WARM UP TIME ≤ 0,5"</p> <p>SWITCHING CYCLE > 25.000</p> <p>LIFETIME 25.000 h</p> <p>KELVIN SETTABLE 2700 K / 4000 K</p> <p>REF. CODE H.LED.GU10.CCT</p> <p>COMPARISON 3,5W = 50W 400 Lm halogen SAVE 92%</p>

GU10 LED - CCT SETTABLE	
 <p>ENERGY CLASS A⁺</p> <p>CCT SETTABLE 2700 K 4000 K SDCM <6</p> <p>SILICONE PROTECTION DRIVER</p> <p>INDOOR & OUTDOOR USE -30 +80 °C 90% HUMIDITY VOLTAGE SURGE RESISTANT</p> <p>TUV SUD CB LVD EMC ERP 6000h IECEE CB SCHEME IECEE CB CERTIFICATE: SG PSB-LE-02300A1</p>	<p>POWER 6 W</p> <p>LUMINOUS FLUX 600 lm</p> <p>SIZE & SOCKET Ø50 58 GU10</p> <p>EFFICIENCY 100 lm/W</p> <p>VOLTAGE 100-240 V</p> <p>FREQUENCY 50/60 Hz</p> <p>CURRENT 70 mA</p> <p>COLOR RENDERING INDEX RA > 80</p> <p>SDCM < 6</p> <p>BEAM ANGLE 45°</p> <p>WARM UP TIME ≤ 0,5"</p> <p>SWITCHING CYCLE > 25.000</p> <p>LIFETIME 25.000 h</p> <p>KELVIN SETTABLE 2700 K / 4000 K</p> <p>REF. CODE H2.LED.GU10.CCT</p> <p>COMPARISON 6W = 100W 600 Lm halogen SAVE 95%</p>

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

R7s LED

TÜV CERTIFIED LED MODULES




INDOOR & OUTDOOR USE


-30 +80 °C 90% HUMIDITY

VOLTAGE SURGE RESISTANT



CCT SETTABLE

- Switch settable in three different positions, to select the desired Kelvin temperature (2700K, 4000K, 6500K) and get a customized ambiance.
- 2700K, 4000K and 6500K led chips on 3 separate circuits to grant SDCM < 6.



LENS

- Opal lens made of UV stabilized resin material to avoid yellowing process.
- Designed for granting 360° light distribution and for improving light efficiency.

HEATSINK

- Made by an aluminum tube on which the PCB is glued to.
- Special design to grant a correct heat dissipation



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- High quality capacitors and multiple resistances able to withstand power surges.



GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3014 LED.



THERMOCONDUCTIVE SILICONE PASTE (7,5W-10,5W)


- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime.
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.




R7s LAMPHOLDER

- Quick and easy lamp replacement and version upgrade.
- Made of steatite material to resist up to 250°.
- VDE certified.



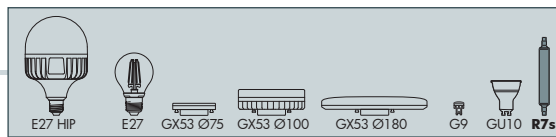



R7s LED 78mm - CCT SETTABLE




INDOOR & OUTDOOR USE
-30 +80 °C 90% HUMIDITY
VOLTAGE SURGE RESISTANT




Ø22mm




ENERGY CLASS: A+

POWER	3 W
LUMINOUS FLUX	400 lm
SIZE & SOCKET	 R7s
EFFICIENCY	133 Lm/W
VOLTAGE	100-240 V
FREQUENCY	50/60 Hz
CURRENT	75 mA
POWER FACTOR	> 0,5
COLOR RENDERING INDEX RA	> 80
SDCM	< 6
BEAM ANGLE	360°
WARM UP TIME	≤ 0,5"
SWITCHING CYCLE	45.000
LIFETIME	25.000 h
KELVIN SETTABLE	2700 K / 4000 K / 6500 K
REF. CODE	H7.LED.R7S.CCT




LVD EMC ERP 6000h




CCT SETTABLE
2700 K 4000 K 6500 K
SDCM < 6


R7s LED 78mm - CCT SETTABLE




SILICONE PROTECTION
DRIVER
INDOOR & OUTDOOR USE
-30 +80 °C 90% HUMIDITY
VOLTAGE SURGE RESISTANT




Ø22mm




ENERGY CLASS: A+

POWER	7,5 W
LUMINOUS FLUX	850 lm
SIZE & SOCKET	 R7s
EFFICIENCY	113 Lm/W
VOLTAGE	100-240 V
FREQUENCY	50/60 Hz
CURRENT	168 mA
POWER FACTOR	> 0,5
COLOR RENDERING INDEX RA	> 80
SDCM	< 6
BEAM ANGLE	360°
WARM UP TIME	≤ 0,5"
SWITCHING CYCLE	45.000
LIFETIME	25.000 h
KELVIN SETTABLE	2700 K / 4000 K / 6500 K
REF. CODE	H8.LED.R7S.CCT




LVD EMC ERP 6000h




CCT SETTABLE
2700 K 4000 K 6500 K
SDCM < 6


R7s LED 78mm - CCT SETTABLE




SILICONE PROTECTION
DRIVER
INDOOR & OUTDOOR USE
-30 +80 °C 90% HUMIDITY
VOLTAGE SURGE RESISTANT




Ø22mm




ENERGY CLASS: A+

POWER	10,5 W
LUMINOUS FLUX	1100 lm
SIZE & SOCKET	 R7s
EFFICIENCY	104 Lm/W
VOLTAGE	100-240 V
FREQUENCY	50/60 Hz
CURRENT	170 mA
POWER FACTOR	> 0,5
COLOR RENDERING INDEX RA	> 80
SDCM	< 6
BEAM ANGLE	360°
WARM UP TIME	≤ 0,5"
SWITCHING CYCLE	45.000
LIFETIME	25.000 h
KELVIN SETTABLE	2700 K / 4000 K / 6500 K
REF. CODE	H9.LED.R7S.CCT



LVD EMC ERP 6000h



CCT SETTABLE
2700 K 4000 K 6500 K
SDCM < 6



REFERENCES

LAMPS

POST

URBAN / MODERN

URBAN CLASSIC

GARDEN

BULKHEAD

BOLLARD

FLOODLIGHT

BRICKLIGHT

IN-GROUND

DOWNLIGHT

UP&DOWN

COMPANY

FUMAGALLI IN THE WORLD

REFERENCES

LAMPS

POST

URBAN MODERN

URBAN CLASSIC

GARDEN

BULKHEAD

BOLLARD

FLOODLIGHT

BRICKLIGHT

IN-GROUND


DOWNLIGHT

UP&DOWN

COMPANY



ITALY

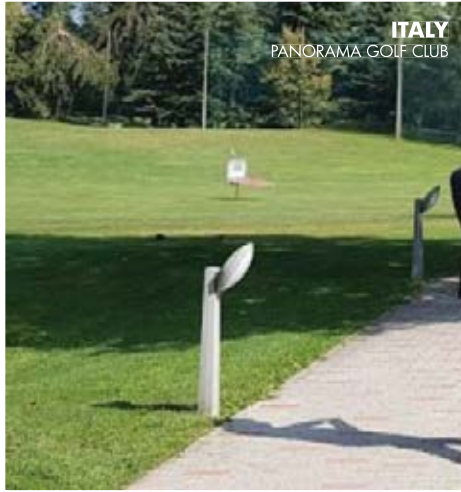

ITALY
PANORAMA GOLF CLUB



ITALY



ITALY



ALBANIA



ALBANIA TIRANA - TE STELA HOTEL




PORTUGAL



ALBANIA



ALBANIA

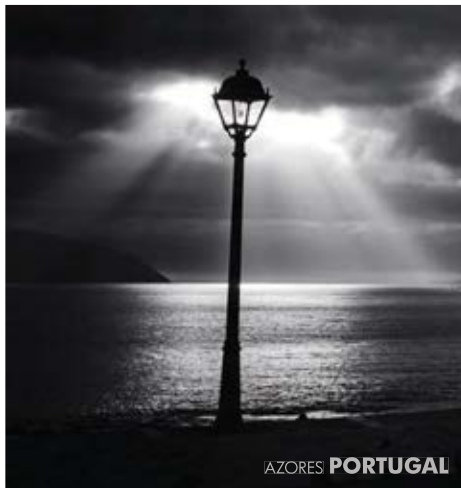

AZORES PORTUGAL




OESTE - PRAIA DEL REY GOLF CLUB PORTUGAL

MADE IN ITALY



KOSOVO

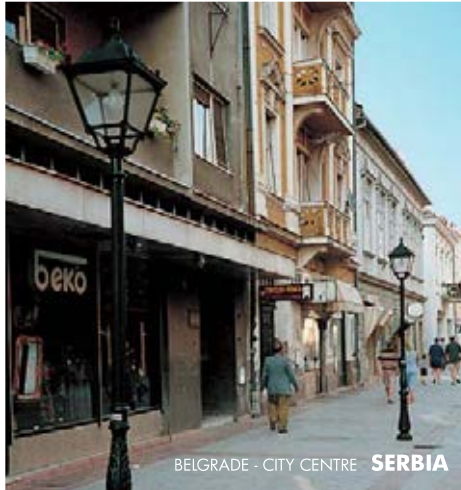


BELGRADE - CITY CENTRE **SERBIA**



GREAT BRITAIN



GREAT BRITAIN
CHESHIRE

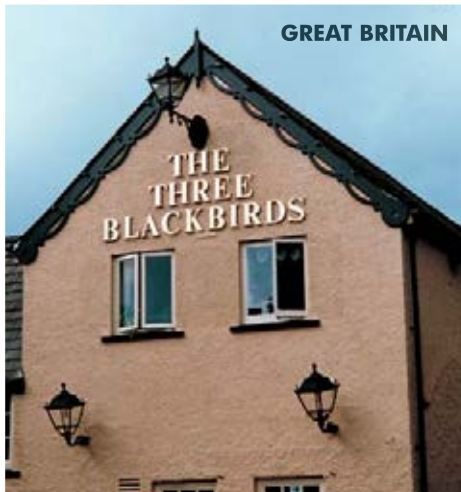

GREAT BRITAIN




GREAT BRITAIN



GREAT BRITAIN
NORTH EAST ENGLAND



GREAT BRITAIN
CHESHIRE

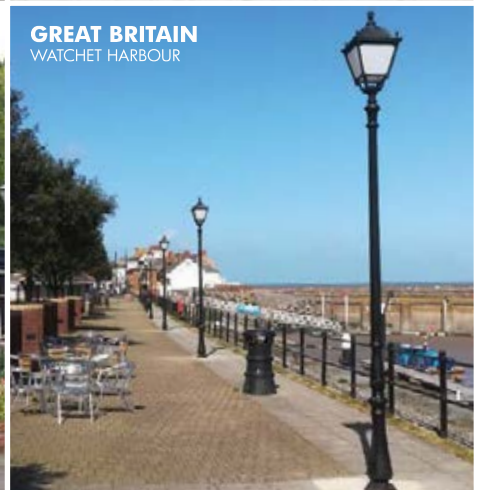

GREAT BRITAIN
WATCHET HARBOUR






GREAT BRITAIN CARAVAN PARK - SOUTH WEST ENGLAND



GREAT BRITAIN
CHESHIRE



GREAT BRITAIN CORNWALL

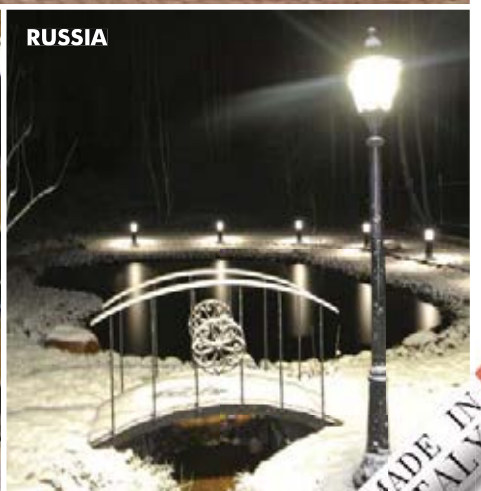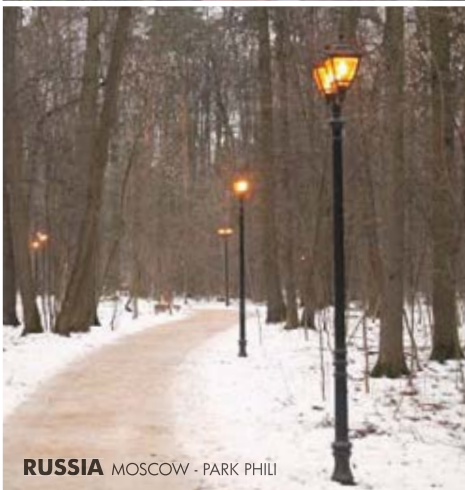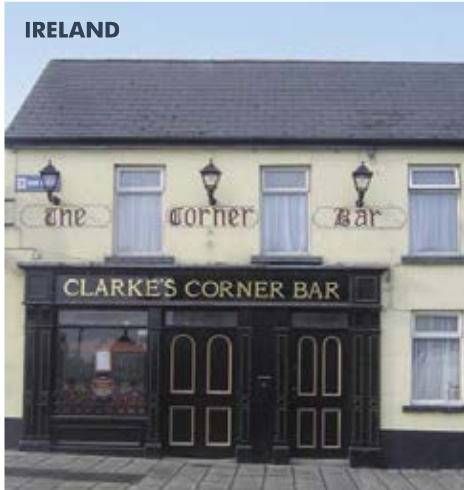


MADE IN ITALY



ROMANIA



ROMANIA TARGU CETATE NEAMȚ

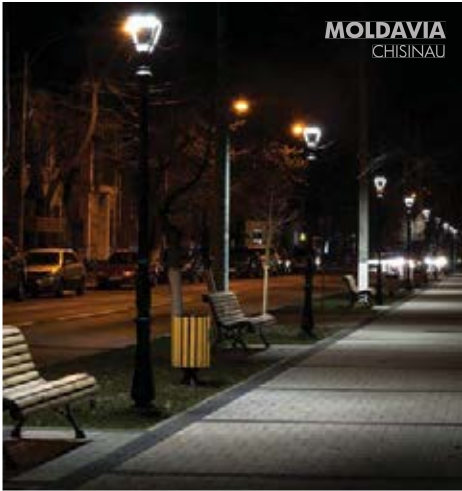

MOLDAVIA
CHISINAU



MOLDAVIA



GREECE PAROS



GREECE
CORFU ISLAND



GREECE
SANTORINI



GREECE
MUNICIPALITY OF LESVOS



GREECE
CORFU ISLAND



GREECE ZANTE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES



GREECE PAROS




GREECE
CORFU ISLAND



GREECE



GREECE

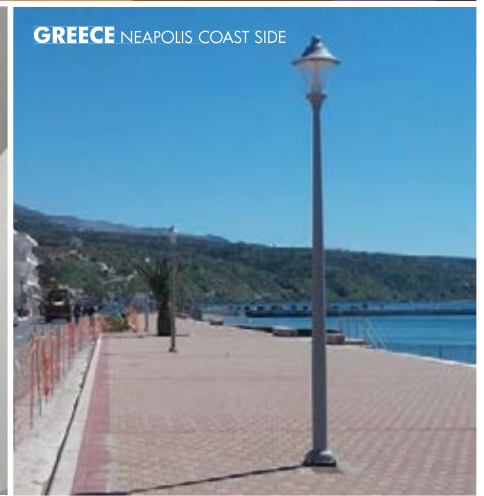


GREECE NEAPOLIS COAST SIDE



CYPRUS
ISKELE MUNICIPALITY - MARINE PARK



CYPRUS
FOLEYS SCHOOL - LIMASSOL

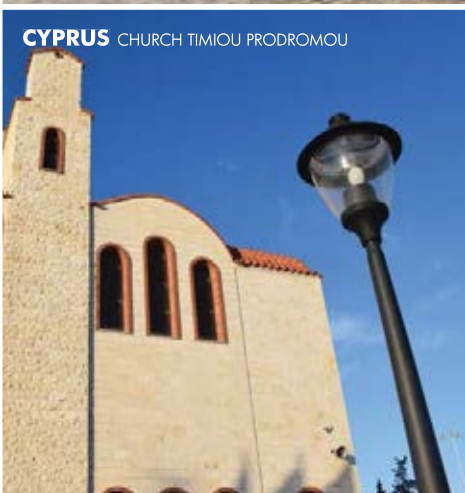

CYPRUS CHURCH TIMIOU PRODROMOU



PRINCESS BEACH HOTEL LARNACA **CYPRUS**







MOROCCO



MOROCCO



MOROCCO




MOROCCO



MOROCCO
MANSOURIA BEACH RESORT



MOROCCO AEROPORT DAKHLA

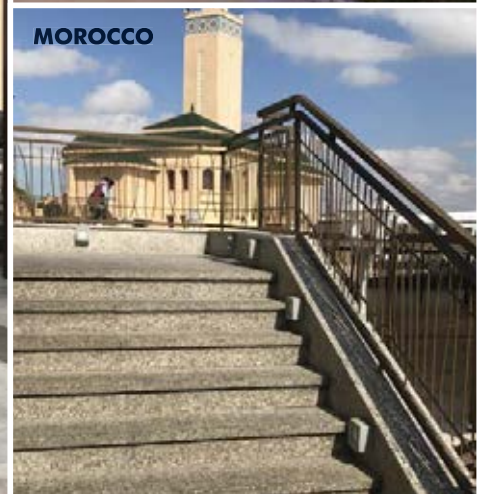

MOROCCO



MOROCCO



MOROCCO



MOROCCO






TUNISI - SHERATON HOTEL **TUNISIA**




TUNISIA




TUNISIA

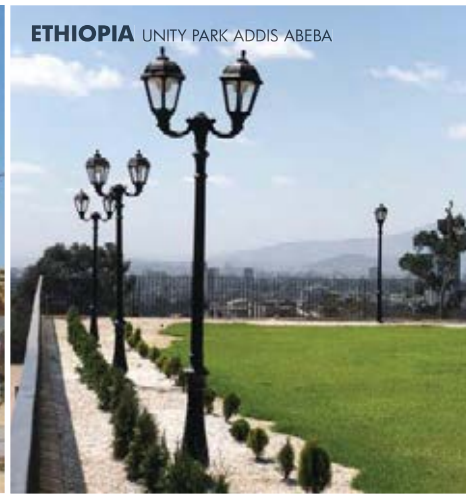


ETHIOPIA UNITY PARK ADDIS ABEBA

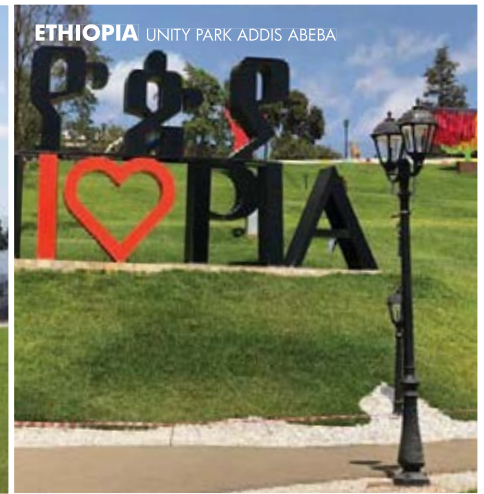

ETHIOPIA UNITY PARK ADDIS ABEBA

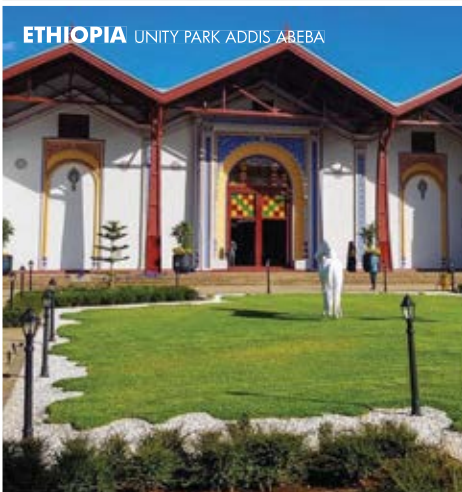

ETHIOPIA UNITY PARK ADDIS ABEBA

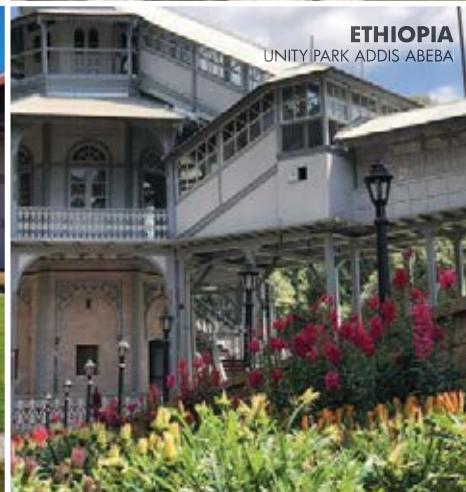

ETHIOPIA
UNITY PARK ADDIS ABEBA




PALESTINE



PALESTINE



PALESTINE

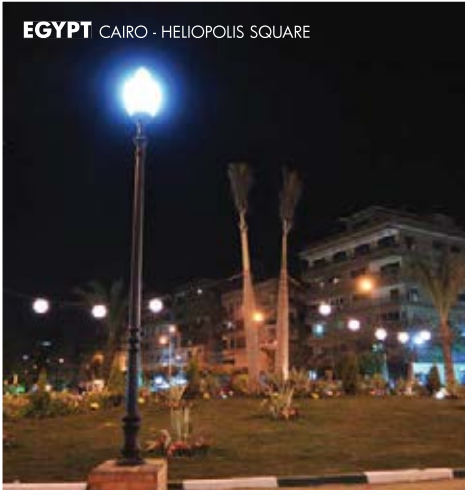

EGYPT CAIRO - HELIOPOLIS SQUARE



EGYPT



EGYPT



ISRAEL



ISRAEL



ISRAEL



LEBANON



LEBANON



LEBANON SHAYKH ZAYED PARK - SAIDA



LEBANON



JIEH MARINA RESORT LEBANON



LEBANON






SAUDI ARABIA



SAUDI ARABIA
KING ABDULLAH UNIVERSITY

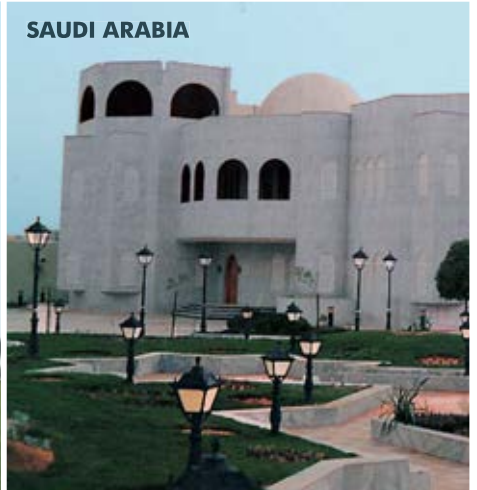

SAUDI ARABIA



SAUDI ARABIA



SAUDI ARABIA



SAUDI ARABIA




SAUDI ARABIA
TABOOK UNIVERSITY



SAUDI ARABIA



SAUDI ARABIA

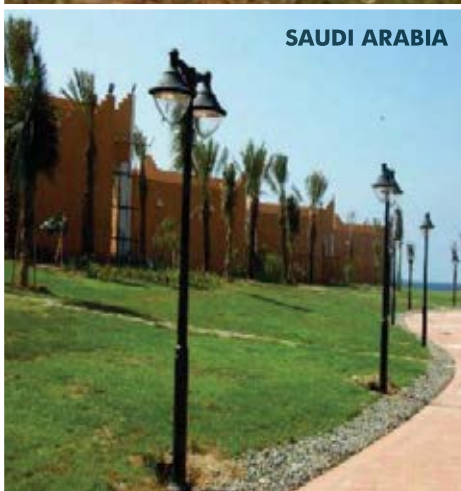

SAUDI ARABIA



SAUDI ARABIA



MADE IN ITALY

QATAR DOHA - CORNICE



QATAR



QATAR DOHA - AL KHULAI FAT PARK



QATAR

BAHRAIN



KUWAIT



KUWAIT



COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

U.A.E. DUBAI DOWNTOWN - BURJ KHALIFA



U.A.E. DUBAI - JUMEIRAH BEACH HOTEL



U.A.E. DUBAI - BURJ AL ARAB



U.A.E.



U.A.E. DUBAI - THE PALM



U.A.E. DUBAI - ACADEMIC CITY



U.A.E. DUBAI - NAKHEEL VILLAS




U.A.E. DUBAI - SHOROQ COMMUNITY CENTRE



MADE IN ITALY




OMAN MUSCAT - MINISTRY OF JUSTICE

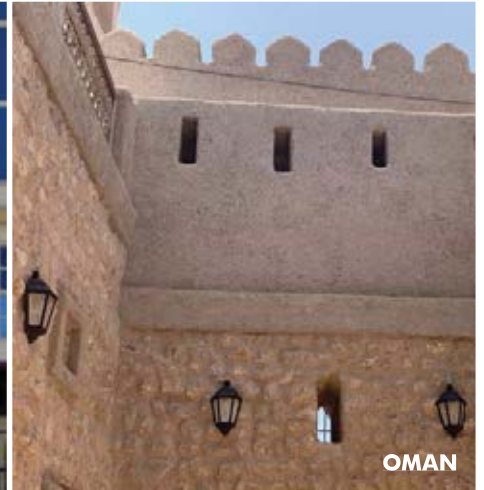

OMAN



MUSCAT - MINISTRY OF JUSTICE OMAN

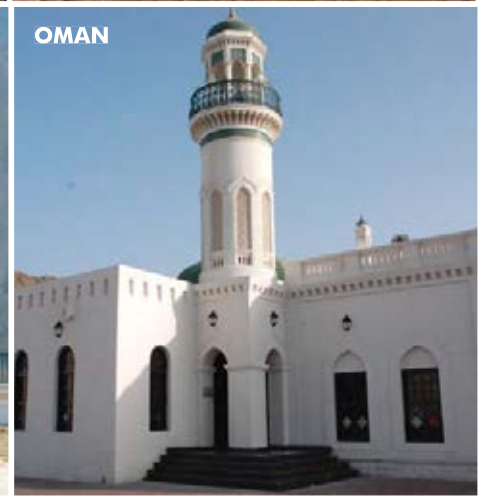


OMAN



MUSCAT - SULTAN'S PALACES OMAN



WADI DAYQAT OMAN

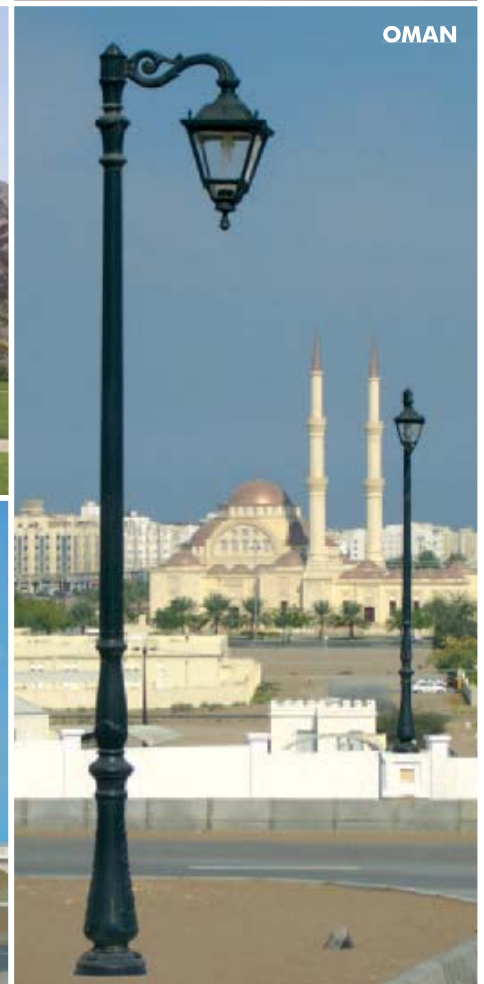

OMAN



MUSCAT - AL BUSTAN PALACE OMAN




OMAN



GEORGIA



GEORGIA

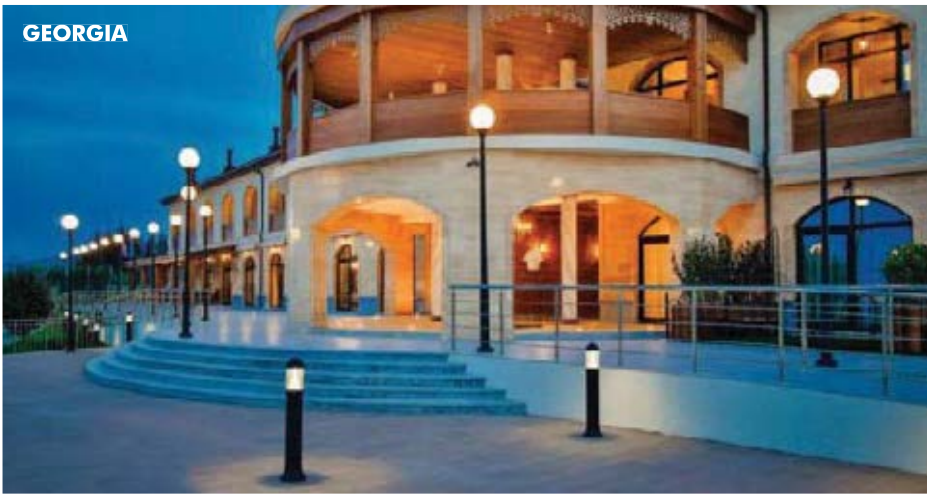

GEORGIA



INDIA
THIRUVANANTHAPURAM
INTERNATIONAL AIRPORT



INDIA MAHABLESHWAR



MAHABLESHWAR INDIA



MALAYSIA







MALAYSIA





MALAYSIA



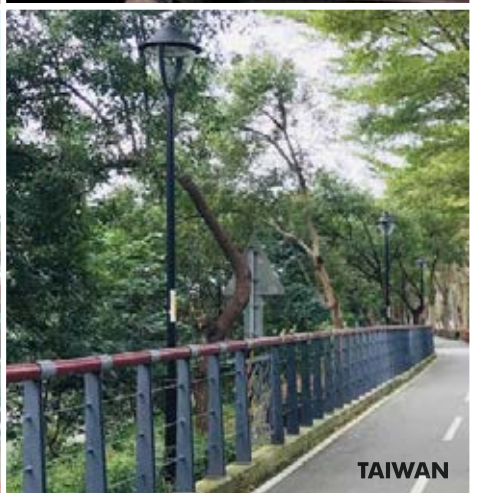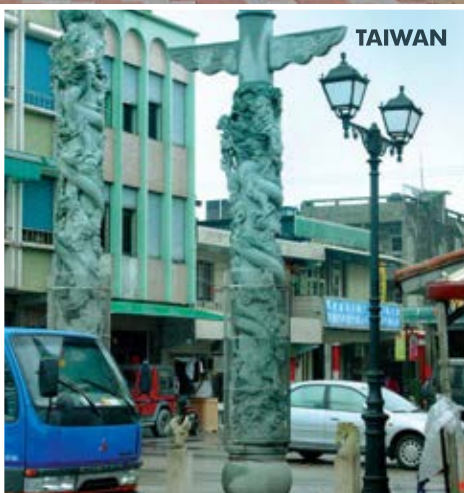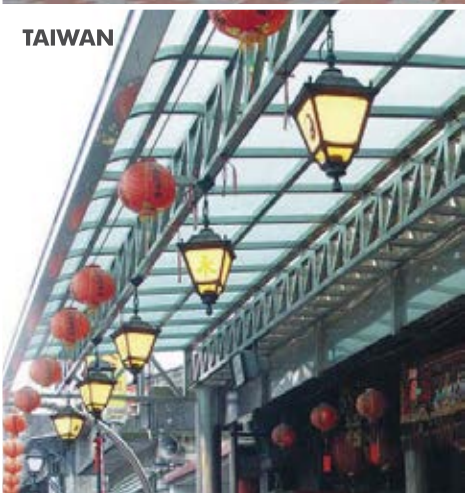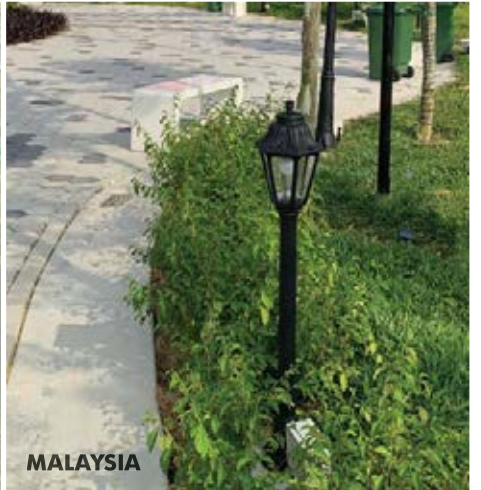

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

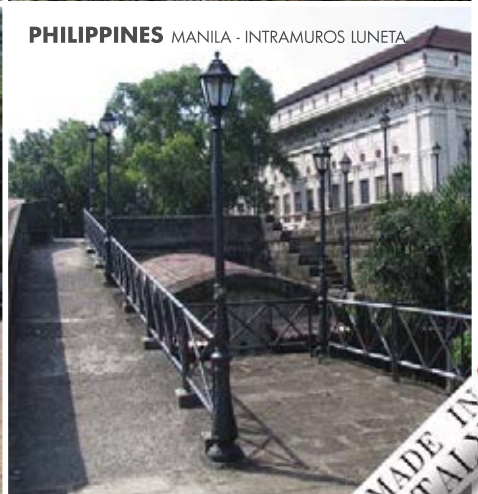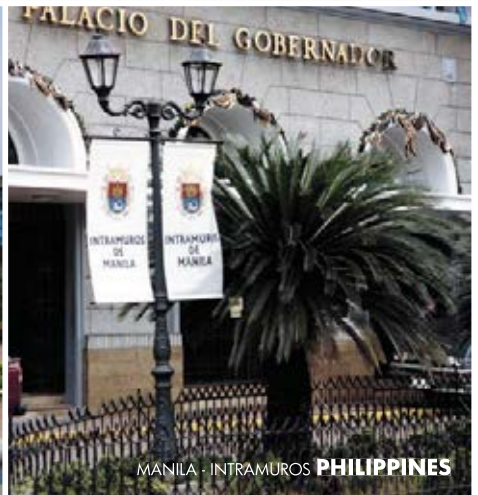



KOREA



KOREA



KOREA



KOREA



NEPAL
LUMBINI




KOREA




NEPAL
LUMBINI



NEPAL
PRESIDENT HOUSE

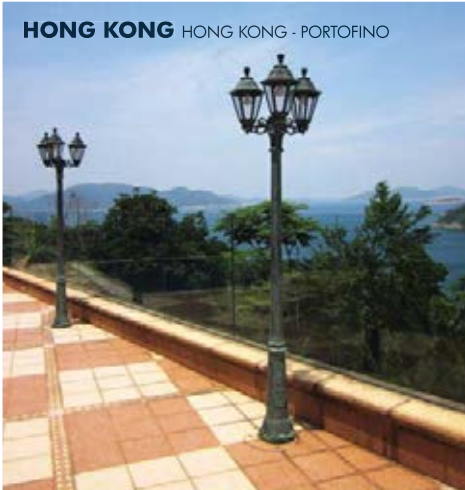

HONG KONG HONG KONG - PORTOFINO

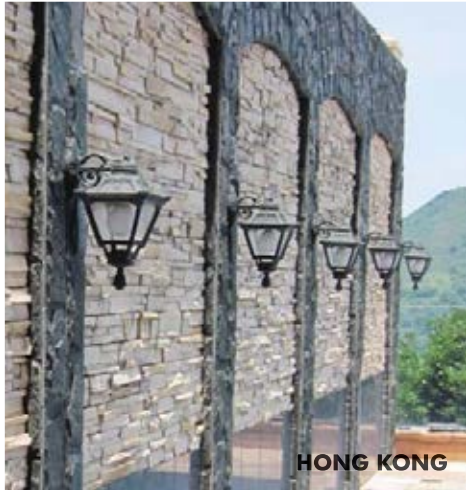

HONG KONG




HONG KONG



HONG KONG




HONG KONG - SHATIN
HONG KONG

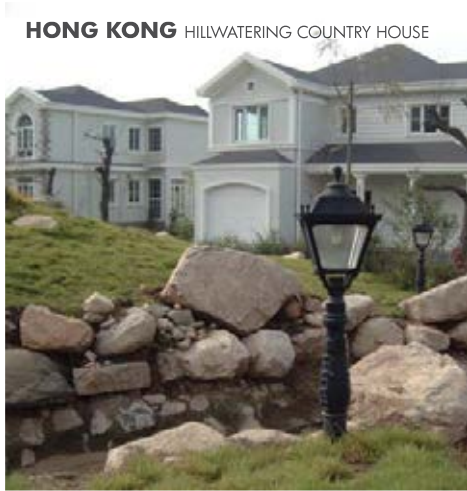

HONG KONG HILLWATERING COUNTRY HOUSE



MACAU

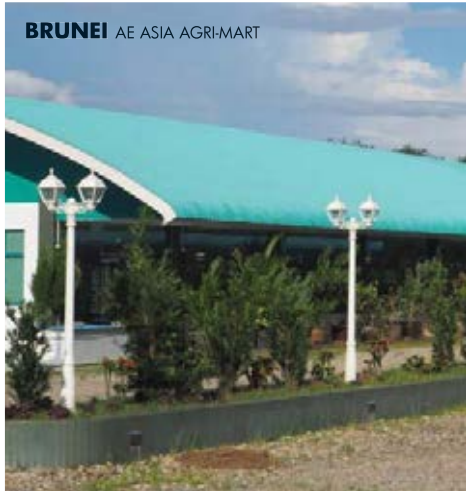

BRUNEI AE ASIA AGRI-MART



BRUNEI MANGROVE PARADISE RESORT



BRUNEI MINISTRY OF HOME AFFAIR



BRUNEI



BRUNEI

MADE IN ITALY

PANAMA LA CALZADA DE AMADOR



COSTA RICA



COSTA RICA



SURINAME



MEXICO



MEXICO



SURINAME PARAMARIBO - INDEPENDENCE SQUARE
MINISTRY OF FINANCE







100-2021

Fumagalli S.r.l.

Via Ca' Bassa, 29

21100 Varese - ITALY

Tel. +39.0332.336353

Fax. +39.0332.336358

E-mail italian.lux@fumagalli.it



www.fumagalli.it